

CHIP TANTALUM CAPACITOR LOW ESR - SMD

CA45L



FEATURES


- Operating temperature Range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$ ($>80^{\circ}\text{C}$ with rated voltage derating)
- Laser-marked Case
- Capacitance tolerance: $\pm 20\%$; $\pm 10\%$ (for special order)
- DC leakage at 25°C : $10 \leq 0.01 \text{ Cr}$ or 0.5 Ma (Whichever is greater)
- Dimensions rated voltage and nominal capacitance Please see Table 1 & 2 and Figure 1

INTRODUCTION

The CA45L Series is low ESR tantalum chip capacitor suitable

For SMT electric board used for telecommunication computer camcorder and mobile phone set and so on

Low ESR value conform with EIA535BAAC size: Tape and Reeled per EIA481-1

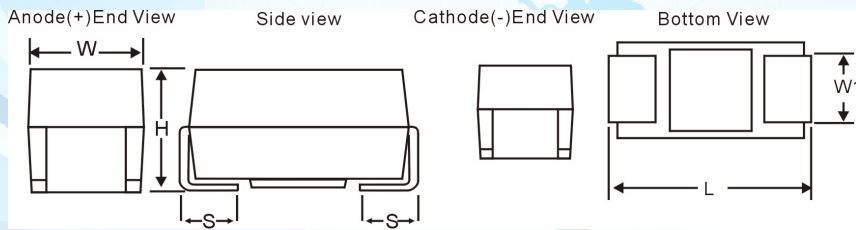

case	L	W	H	S	W1
S	2.0±0.2	1.3±0.2	1.2±0.2	0.5±0.3	1.2±0.1
A	3.2±0.2	1.6±0.2	1.6±0.2	0.8±0.3	1.2±0.1
B	3.5±0.2	2.8±0.2	1.8±0.2	0.8±0.3	2.2±0.1
C	6.0±0.3	3.2±0.3	2.5±0.3	1.3±0.3	2.2±0.1
D	7.3±0.3	4.3±0.3	2.8±0.3	1.3±0.3	2.4±0.1
E	7.3±0.3	4.3±0.3	4.0±0.3	1.3±0.3	2.4±0.1

ELECTROLYTE CHARACTERISTICS OF CA45L TANTALUM CHIP CAPACITOR

Capacitance (μF)	Case Size	($U_a @ +25^{\circ}\text{C}$ Max) DC Leakage	DF (%) @ 85°C @ 100Hz (Max)	ESR (Ω) @ 25°C @ 100KHz (Max)
4Volt Rating at $+85^{\circ}\text{C}$ (2.7Volt Rating $+125^{\circ}\text{C}$)				
3.3	A	0.5	6.0	4.0
4.7	A	0.5	6.0	3.5
6.8	A	0.5	6.0	3.0
10	B	0.5	6.0	1.2
10	A	0.5	6.0	2.0
10	S	0.6	6.0	6.0
15	B	0.6	6.0	1.2
15	A	0.6	6.0	1.5
22	C	0.9	6.0	0.5
22	B	0.9	6.0	0.6
22	A	0.9	6.0	1.5
33	C	1.3	6.0	0.5
33	B	1.3	6.0	0.5
33	A	1.3	6.0	3.0
47	C	1.9	6.0	0.5
47	B	1.9	6.0	0.5
47	A	1.9	12.0	2.0
68	D	2.7	6.0	0.2
68	C	2.7	6.0	0.25
68	B	2.7	6.0	2.0
100	D	4.0	8.0	0.2
100	C	4.0	8.0	0.2
100	B	4.0	10	0.6
150	D	6.0	8.0	0.15
150	C	6.0	8.0	0.3
220	D	8.8	8.0	0.15
330	D	13.2	8.0	0.15
470	E	18.8	8.0	0.15
470	D	18.8	8.0	0.15

Capacitance (μF)	Case Size	($U_a @ +25^{\circ}\text{C}$ Max) DC Leakage	DF (%) @ 85°C @ 100Hz (Max)	ESR (Ω) @ 25°C @ 100KHz (Max)
6.3Volt Rating at $+85^{\circ}\text{C}$ (4Volt Rating $+125^{\circ}\text{C}$)				
2.2	A	0.5	6.0	6.0
3.3	A	0.5	6.0	6.0
4.7	A	0.5	6.0	3.5
6.8	B	0.5	6.0	1.2
6.8	A	0.5	6.0	2.0
6.8	S	0.5	6.0	8.0
10	B	0.6	6.0	1.0
10	A	0.6	6.0	2.0
10	S	0.6	8.0	6.0
15	C	0.9	6.0	0.6
15	B	0.9	6.0	0.7
15	A	0.9	6.0	2.0
22	C	1.4	6.0	0.5
22	B	1.4	6.0	0.6
22	A	1.4	6.0	3.0
33	C	2.0	6.0	0.3
33	B	2.0	6.0	0.6
33	A	2.0	12.0	2.0
47	D	2.9	6.0	0.22
47	C	2.9	6.0	0.25
47	B	2.9	6.0	2.0
68	D	4.1	6.0	0.2
68	C	4.1	6.0	0.2
100	D	6.0	8.0	0.15
100	C	6.0	8.0	0.3
150	D	9.0	8.0	0.15
150	C	9.0	8.0	0.3
220	E	13.2	8.0	0.15
220	D	13.2	8.0	0.15
330	E	19.8	8.0	0.15
330	D	19.8	8.0	0.15
470	E	28.2	10.0	0.1

CA45L

Capacitance (μ F)	Case Size	(μ a@+25°C Max) DC Leakage	DF (%) @85°C @100Hz (Max)	ESR (Ω) @25°C @100KHZ (Max)
10Volt Rating at +85°C (7.0Volt Rating +125°C)				
1.5	A	0.5	6.0	6.0
2.2	A	0.5	6.0	6.0
3.3	A		6.0	4.0
4.7	B	0.5	6.0	1.5
4.7	A	0.5	6.0	3.0
4.7	S	0.5	8.0	8.0
6.8	B	0.7	6.0	1.2
6.8	A	0.7	6.0	3.0
10.0	C	1.0	6.0	0.6
10.0	B	1.0	6.0	0.8
10.0	A	1.0	6.0	2.0
15.0	C	1.5	6.0	0.5
15.0	B	1.5	6.0	0.7
15.0	A	1.5	8.0	4.0
22.0	C	2.2	6.0	0.4
22.0	B	2.2	6.0	0.7
33.0	D	3.3	6.0	0.25
33.0	C	3.3	6.0	0.3
33.0	B	3.3	6.0	2.0
47.0	D	4.7	6.0	0.22
47.0	C	4.7	6.0	0.3
68.0	D	6.8	6.0	0.2
68.0	C	6.8	6.0	0.3
100.0	D	10.0	8.0	0.15
100.0	C	10.0	8.0	0.3
150.0	E	15.0	8.0	0.15
150.0	D	15.0	8.0	0.15
220.0	E	22.0	8.0	0.15
220.0	D	22.0	8.0	0.15
330.0	E	33.0	10.0	0.10
20Volt Rating at +85°C (13Volt Rating +125°C)				
0.68	A	0.5	4.0	8.0
1.0	A	0.5	4.0	5.5
1.5	A	0.5	6.0	4.5
2.2	B	0.5	6.0	1.5
2.2	A	0.5	6.0	4.0
3.3	B	0.7	6.0	1.3
3.3	A	0.7	6.0	4.0
4.7	C	1.0	6.0	0.6
4.7	B	1.0	6.0	1.0
4.7	A	1.0	6.0	3.5
6.8	C	1.4	6.0	0.6
6.8	B	1.4	6.0	1.0
10.0	C	2.0	6.0	0.5
10.0	B	2.0	6.0	1.0
15.0	D	3.0	6.0	0.36
15.0	C	3.0	6.0	0.4
22.0	D	4.4	6.0	0.3
22.0	C	4.4	6.0	0.4
33.0	D	6.6	6.0	0.25
33.0	C	6.6	6.0	0.4
47.0	D	9.4	6.0	0.2
68.0	E	13.6	6.0	0.2
68.0	D	13.6	8.0	0.2
100.0	E	20.0	8.0	0.15

Capacitance (μ F)	Case Size	(μ a@+25°C Max) DC Leakage	DF (%) @85°C @100Hz (Max)	ESR (Ω) @25°C @100KHZ (Max)
16Volt Rating at +85°C (10Volt Rating +125°C)				
1.0	A	0.5	4.0	6.0
1.5	A	0.5	6.0	6.0
2.2	A	0.5	6.0	4.0
2.2	S	0.5	8.0	20.0
3.3	A	0.5	6.0	4.0
3.3	B	0.5	6.0	2.0
4.7	B	0.8	6.0	1.5
4.7	A	0.8	6.0	3.0
6.8	C	1.1	6.0	0.8
6.8	B	1.1	6.0	1.2
6.8	A	1.1	6.0	3.0
10.0	C	1.6	6.0	0.6
10.0	B	1.6	6.0	0.8
15.0	C	2.4	6.0	0.4
15.0	B	2.4	6.0	0.8
22.0	D	3.6	6.0	0.25
22.0	C	3.6	6.0	0.35
33.0	D	5.3	6.0	0.25
33.0	C	5.3	6.0	0.3
47.0	D	7.5	6.0	0.2
47.0	C	7.5	6.0	0.55
68.0	D	10.9	6.0	0.15
100.0	E	16.0	8.0	0.15
100.0	D	16.0	8.0	0.15
150.0	E	24.0	8.0	0.15

Capacitance (μ F)	Case Size	(μ a@+25°C Max) DC Leakage	DF (%) @85°C @100Hz (Max)	ESR (Ω) @25°C @100KHZ (Max)
25Volt Rating at +85°C (17Volt Rating +125°C)				
0.33	A	0.5	4.0	10.0
0.47	A	0.5	4.0	9.0
0.68	A	0.5	4.0	6.0
1.0	B	0.5	4.0	2.0
1.0	A	0.5	4.0	4.0
1.5	B	0.5	6.0	1.5
1.5	A	0.5	6.0	5.0
2.2	C	0.6	6.0	1.2
2.2	B	0.6	6.0	2.2
3.3	C	0.9	6.0	1.2
3.3	B	0.9	6.0	2.0
4.7	C	1.2	6.0	0.6
4.7	B	1.2	6.0	1.0
6.8	C	1.7	6.0	0.6
10.0	D	2.5	6.0	0.4
10.0	C	2.5	6.0	0.6
15.0	D	3.8	6.0	0.4
15.0	C	3.8	6.0	0.9
22.0	D	5.5	6.0	0.4
33.0	E	8.3	6.0	0.3
33.0	D	8.3	6.0	0.4
47.0	E	11.8	6.0	0.3

CA45L

Capacitance (μ F)	Case Size	(μ a@+25°C Max) DC Leakage	DF (%) @85°C @100Hz (Max)	ESR (Ω) @25°C @100KHZ (Max)
35Volt Rating at +85°C (23Volt Rating+125°C)				
0.1	A	0.5	4.0	10.0
0.15	A	0.5	4.0	6.0
0.22	A	0.5	4.0	6.0
0.33	A	0.5	4.0	6.0
0.47	B	0.5	4.0	2.5
0.47	A	0.5	4.0	4.0
0.68	B	0.5	4.0	2.5
0.68	A	0.5	4.0	6.0
1.0	B	0.5	4.0	2.0
1.0	A	0.5	4.0	6.0
1.5	C	0.5	6.0	2.5
1.5	B	0.5	6.0	3.0
2.2	C	0.8	6.0	1.5
2.2	B	0.8	6.0	2.5
3.3	C	1.2	8.0	0.8
3.3	B	1.2	6.0	2.0
4.7	D	1.7	6.0	0.7
4.7	C	1.7	6.0	0.7
6.8	D	2.4	6.0	0.5
6.8	C	2.4	6.0	0.9
10.0	D	3.5	6.0	0.4
10.0	C	3.5	6.0	1.2
15.0	E	5.3	6.0	0.3
15.0	D	5.3	6.0	0.35
22.0	E	7.7	6.0	0.3
22.0	D	7.7	6.0	0.4

Capacitance (μ F)	Case Size	(μ a@+25°C Max) DC Leakage	DF (%) @85°C @100Hz (Max)	ESR (Ω) @25°C @100KHZ (Max)
50Volt Rating at +85°C (30Volt Rating +125°C)				
0.1	A	0.5	4.0	10.0
0.15	B	0.5	4.0	10.0
0.15	A	0.5	4.0	10.0
0.22	B	0.5	4.0	10.0
0.33	B	0.5	4.0	2.5
0.47	C	0.5	4.0	1.8
0.47	B	0.5	4.0	2.0
0.68	C	0.5	4.0	1.6
0.68	B	0.5	4.0	3.0
1.0	C	0.5	4.0	1.6
1.5	D	0.8	6.0	1.0
1.5	C	0.8	6.0	1.5
2.2	D	1.1	6.0	0.8
2.2	C	1.1	6.0	1.5
3.3	D	1.7	6.0	0.8
4.7	D	2.4	6.0	0.6
6.8	E	3.5	6.0	0.5