


DESCRIPTION: 1W Isolated Single Output DC/DC Converters

The TPR-W25 series are miniature, isolated 0.25W DC/DC converters in a SIP package. They offer the ideal solution in many space critical applications for board level power distribution. The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 3KVDC isolation.

FEATURES

RoHS compliant	3KVDC isolation	Efficiency up to 80%
Operating temperature: -40°C to 85°C	Power density up to 0.90W/cm ³	UL 94V-0 package material
Footprint from 1.17cm ²	Industry standard pinout	Input voltage: 5V, 12V
Output voltage: 5V, 12V, 15V	Custom solutions available	/

SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current	Efficiency
	V	V	mA	%
TPR0505S-W25	5	5	50	70
TPR0512S-W25	5	12	21	75
TPR0515S-W25	5	15	16	75
TPR1205S-W25	12	5	50	71
TPR1212S-W25	12	12	21	75
TPR1215S-W25	12	15	16	75

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	5V input	4.5	5	5.5	V
Voltage range	12V input	11	12	13.3	V

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Tested for 1 second	3000			VDC
Resistance	Viso=1000VDC	1			GΩ

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	TA=-40°C to 85°C			1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High VIN to low VIN		1.2		%/%
Load Regulation(10% load to rated load)	TPR0505S-W25/1205S-W25		13		%
Load Regulation(10% load to rated load)	TPR0512S-W25/1212S-W25		7		%

ABSOLUTE MAXIMUM RATINGS

Short-circuit protection	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	540mW
Input voltage Vin, TPR05 variants	7V
Input voltage Vin, TPR12 variants	15V

All specifications typical at TA=25° C, nominal input voltage and rated output current unless otherwise specified.


GENERAL CHARACTERISTICS

Parameter	Conditions	Typ.	Max.	Units
Switching frequency	5V input	120		kHz
Switching frequency	12V input	160		kHz


TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	-40		85	℃
Storage		-50		130	℃
Case Temperature above ambient	5V output types		35		℃
Case Temperature above ambient	All other output types		30		℃
Cooling	Free air convection				

TOLERANCE ENVELOPES

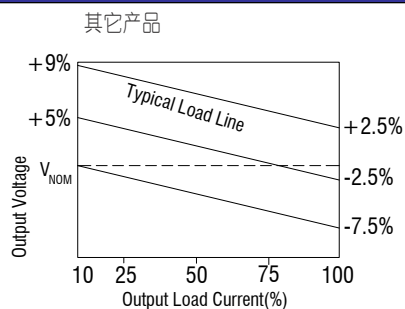


TEMPERATURE DERATING GRAPHS

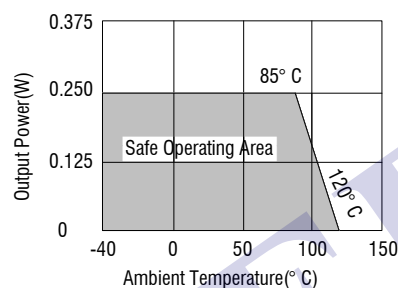

MECHANICAL DIMENSIONS

SIP Package

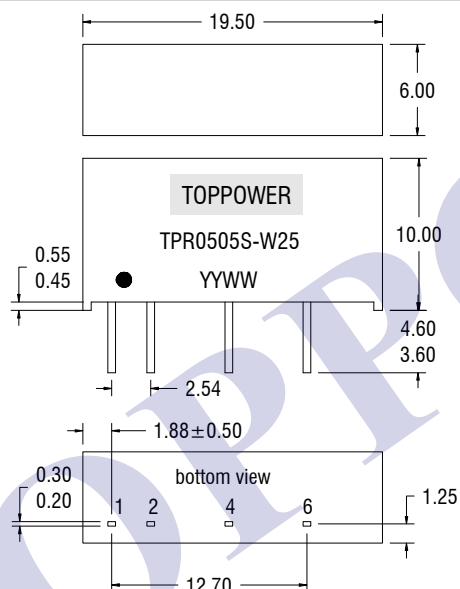


PIN CONNECTIONS-7PIN SIP

Pin	Function
1	+Vin
2	-Vin
4	-Vout
6	+Vout


All dimensions in mm±0.25mm. All pins on a 2.54mm pitch and within±0.25mm of true position.

RECOMMENDED FOOTPRINT DETAILS

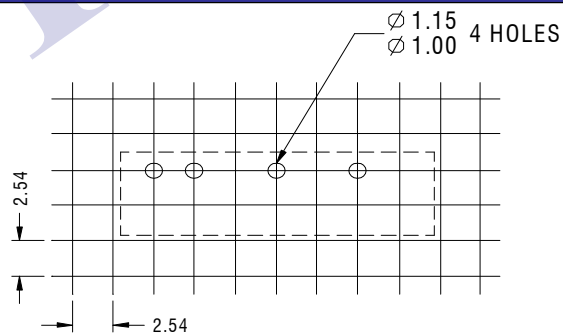

All dimensions in mm±0.25mm

TUBE OUTLINE DIMENSIONS

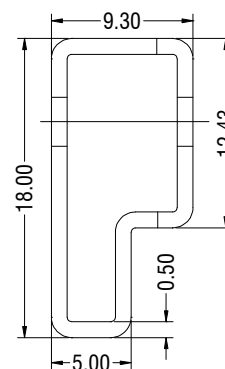

All dimensions in mm±0.25mm

Tube Quantity : 25