

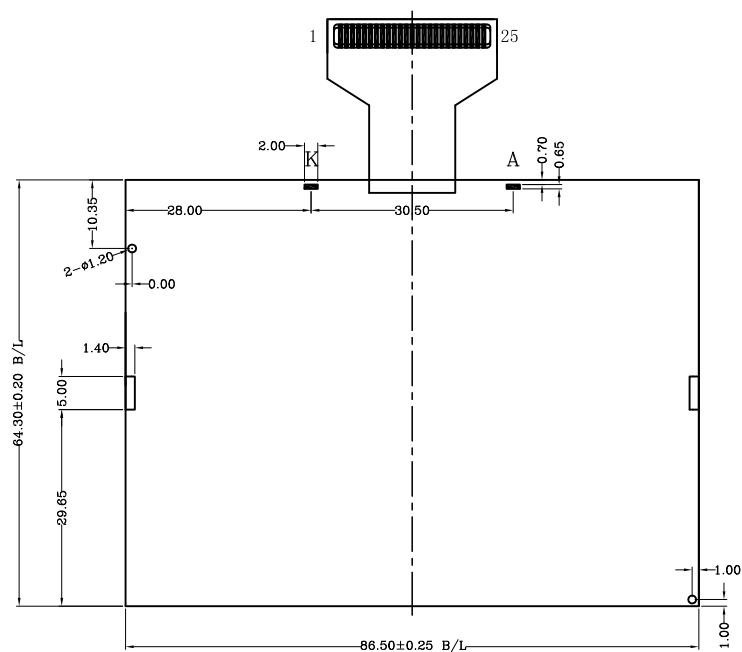
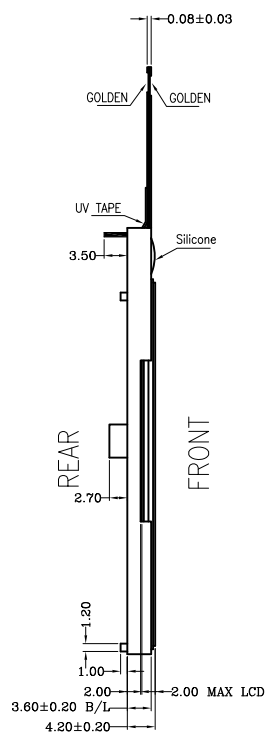


Revised Record

1.0	New issue	2013-03-13	3.0	Adding Remove Tape	2013-03-18		
2.0	Change BL's Voltage	2013-03-16					

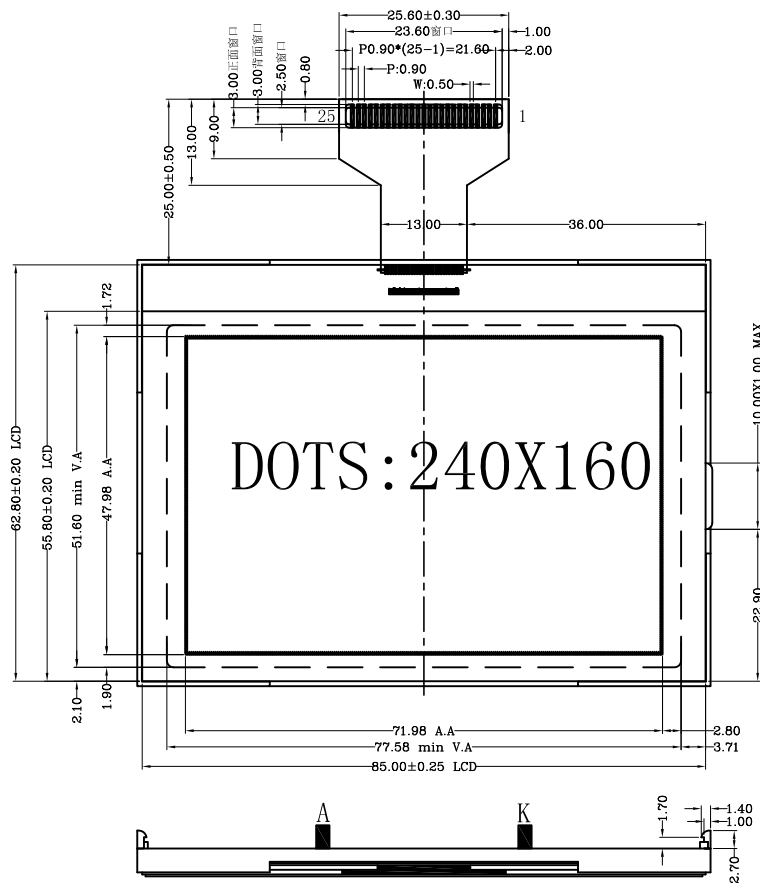

INTERFACE	
1	NC
2	VM
3	VG
4	VO
5	XVO
6	CA1P
7	CA1N
8	VDD
9	VSS
10	IF1
11	IF0
12	/CS
13	A0
14	/RD
15	/WR
16	/RST
17	DB0
18	DB1
19	DB2
20	DB3
21	DB4
22	DB5
23	DB6
24	DB7
25	NC



- NOTES:
- 01. DISPLAY TYPE: STN,BLUE/NEGATIVE/TRANSMISSIVE RoHS
 - 02. OPERATING VOLTAGE: VOP=16.5V,VDD=3.0V
 - 03. OPERATING TEMPERATURE: -20°C~+70°C
 - 04. STORAGE TEMPERATURE: -30°C~+80°C
 - 05. DRIVE MODE: 1/160DUTY,1/14BIAS
 - 06. VIEWING DIRECTION: 6:00
 - 07. DRIVE IC: ST75256
 - 08. CONNECTOR: COG+FPC+BACKLIGHT
 - 09. BACKLIGHT: WHITE,VF=3.1V,IF≤90MA
 - 10. CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-32	BGG240160-03 SERIES	VERSION: 3.0
CHECKED BY: BDT-04		PAGE 1 OF 1
APPROVED BY: BDT-01		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2013-03-18