


DESCRIPTION: 1W 3KVDC Isolated Single And Dual Output SMD DC/DC Converters

Miniature surface mounted DC/DC Converters are an ideal and economical solution for many applications where noise reduction, voltage isolation, voltage conversion in distributed power systems is required. The internal SMD construction with leadframe technology makes it possible to offer a product with high performance, these converters are qualified for the higher temperatures requested by lead-free reflow solder processes, especially for automated SMD production lines.

FEATURES

RoHS compliant	Efficiency up to 82%	Operating temperature :-40℃ to 85℃
UL 94V-0 package material	Input voltage : 5V, 12V ,24V	Lead frame technology
Dual isolated output	Output voltage: ±5V, ±9V, ±12V, ±15V ,5V,9V, 12V, 15V	Plastic encapsulated
3KVDC isolation (1 minute)	Custom solutions available	Power density 1.37W/cm ³

SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current	Efficiency
	V	V	m A	%
TPTV0505	5	±5	±100	70
TPTV0509	5	±9	±55	78
TPTV0512	5	±12	±42	79
TPTV0515	5	±15	±33	80
TPTV1205	12	±5	±100	72
TPTV1209	12	±9	±55	79
TPTV1212	12	±12	±42	81
TPTV1215	12	±15	±33	82
TPTV2405	24	±5	±100	72
TPTV2409	24	±9	±55	79
TPTV2412	24	±12	±42	81
TPTV2415	24	±15	±33	82
TPTV0505A	5	5	200	70
TPTV0509A	5	9	111	78
TPTV0512A	5	12	84	79
TPTV0515A	5	15	66	80
TPTV1205A	12	5	200	72
TPTV1209A	12	9	111	79
TPTV1212A	12	12	84	81
TPTV1215A	12	15	66	82
TPTV2405A	24	5	200	72
TPTV2409A	24	9	111	79
TPTV2412A	24	12	84	81
TPTV2415A	24	15	66	82

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	5V input variants	4.5	5	5.5	V
Voltage range	12V input variants	11	12	13.3	V
Voltage range	24V input variants	22	24	26.5	V

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	TA=-40℃ to 85℃			1.0	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High VIN to low VIN		1.0	1.2	%/%
Load Regulation(10% load to rated load)	5V output variants		10	12	%
Load Regulation(10% load to rated load)	9V output variants		6.5	8.0	%
Load Regulation(10% load to rated load)	12V output variants		7	9	%
Load Regulation(10% load to rated load)	15V output variants		6.5	7.5	%

ABSOLUTE MAXIMUM RATINGS

Short-circuit protection	1 second
Lead temperature 1.5mm from case for 10 seconds	300℃
Internal power dissipation	560mW
Input voltage Vin, TPTV05	7V
Input voltage Vin, TPTV12	15V
Input voltage Vin, TPTV24	28V

ISOLATION CHARACTERISTICS



Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Tested for 1 minute	3000			VDC
Resistance	Viso= 1000VDC	1			G Ω

GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	5V input variants		120		kHz
Switching frequency	12V input variants		130		kHz


TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output	-40		85	℃
Storage		-55		125	℃
Cooling	Free air convection				

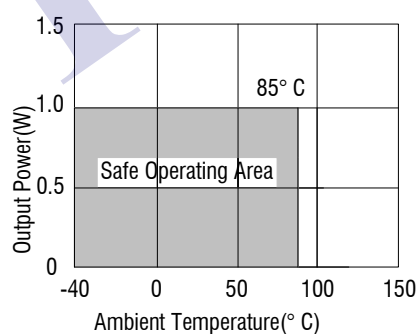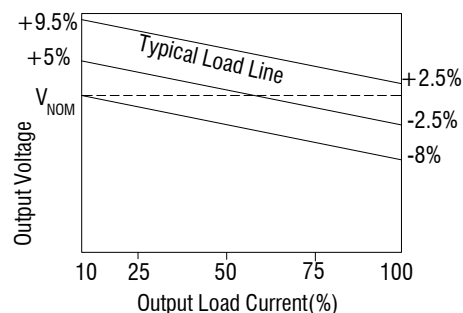TEMPERATURE DERATING GRAPHS

TOLERANCE ENVELOPES

RoHS COMPLIANCE INFORMATION

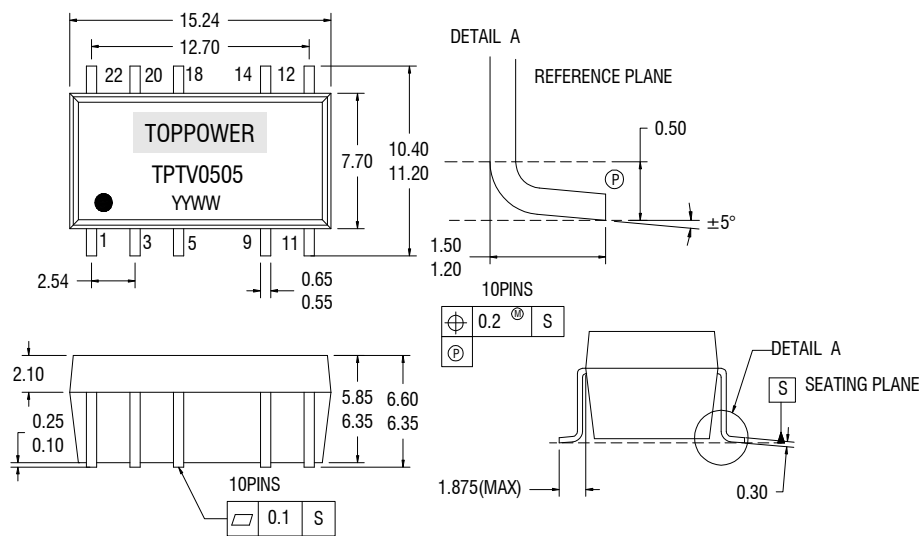This series is compatible with RoHS soldering systems with a peak reflow solder temperature of 245℃ and time above liquids of 217℃ for 80 seconds. The series is backward compatible with Sn/Pb soldering systems.

MECHANICAL DIMENSIONS




PIN CONNECTIONS		
Pin	Dual Output	Single Output
1	-Vin	-Vin
3	+Vin	+Vin
5	NA	NA
9	OV	OV
11	-Vout	NA
12	NA	NA
14	+Vout	+Vout
18	NA	NA
20	NA	NA
22	NA	NA

NA - Not available for electrical connection.


All dimensions in mm ± 0.25 mm. All pins on a 2.54mm pitch.

Weight: 1.53g

RECOMMENDED FOOTPRINT DETAILS

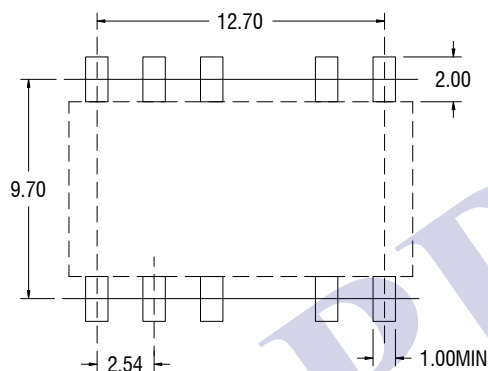

TUBE OUTLINE DIMENSIONS




Unless otherwise stated all dimensions in mm ± 0.5 mm.


Tube length: 475mm ± 2.0 mm

Tube Quantity: 25


REEL OUTLINE DIMENSIONS

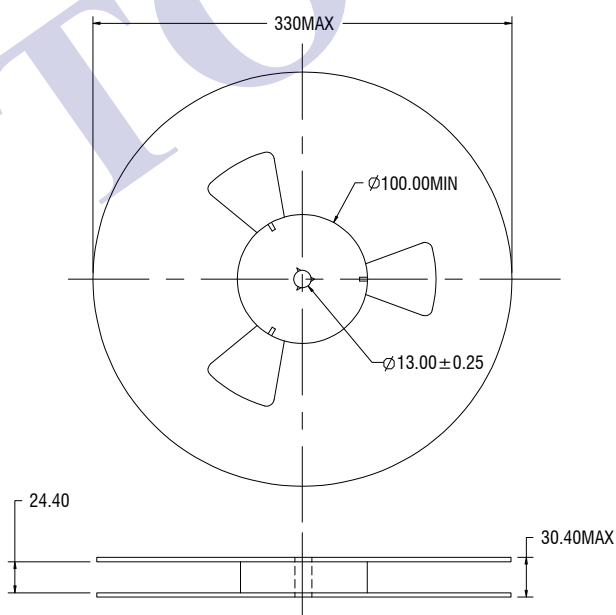

TAPE OUTLINE DIMENSIONS

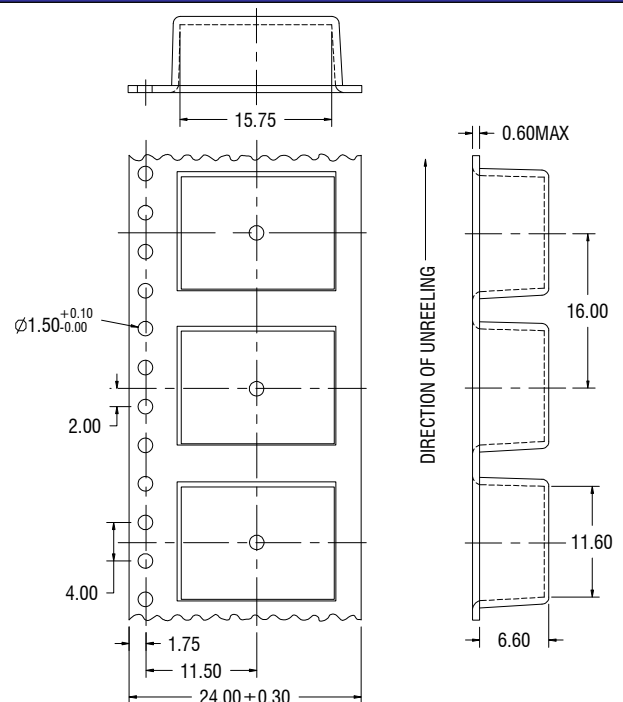

REEL PACKAGING DETAILS

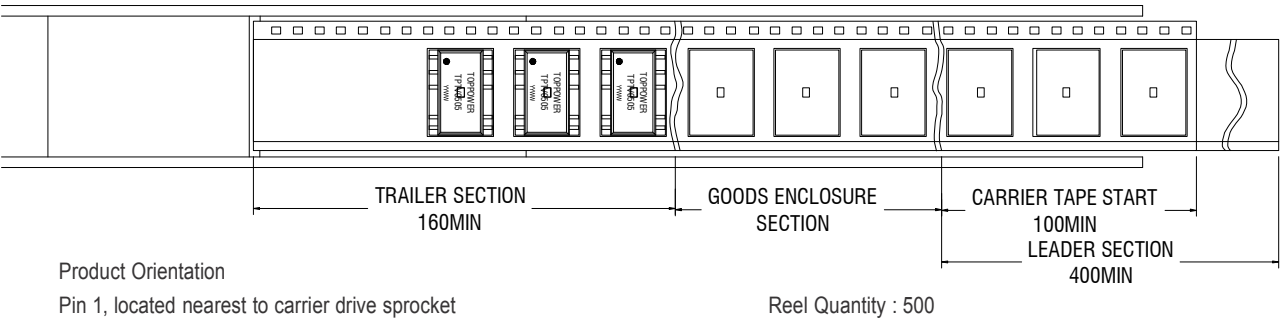

TOPPOWER