

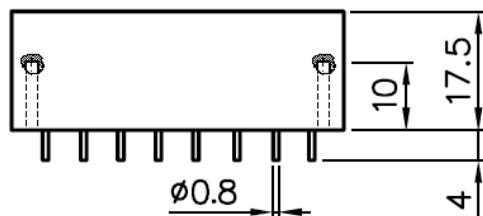
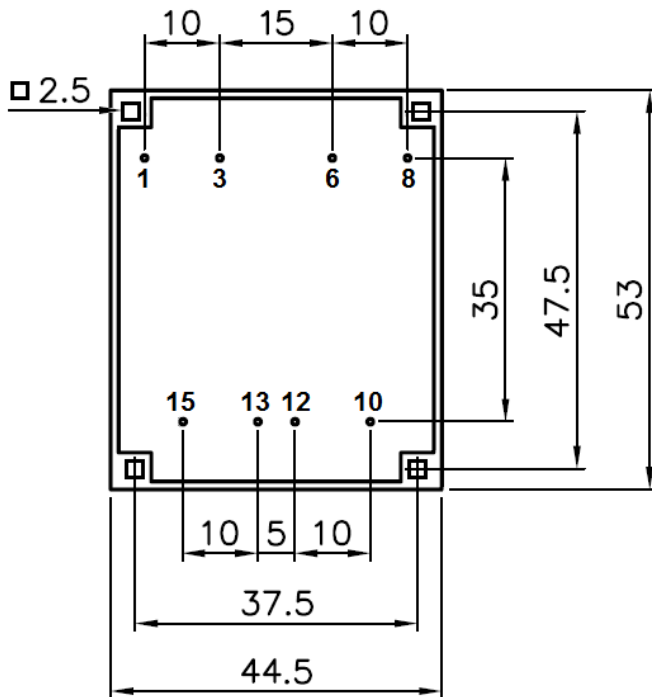



General tolerance: $\pm 0.5\text{mm}$







Conexión Primario / Primary Connections

(Ejemplo / Example)



Conexión Secundario / Secondary Connections

(Ejemplo / Example: U3005.03.2.15)

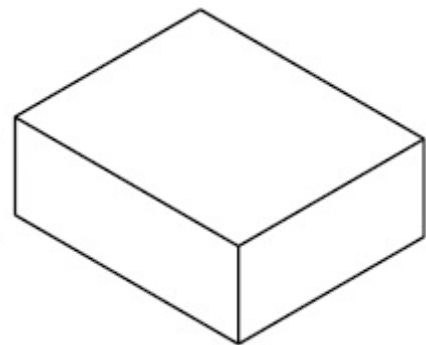

MAIN FEATURES:

- Unitary insulation test at **5KV**
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **125gr**
- Other voltages or pin-out under request**

PART Nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
U3005.03.2.06	3VA	2x115V	2x6V / 2x0.250A	70°C/B	Sec. 2x250mA/F
U3005.03.2.07	3VA	2x115V	2x7.5V / 2x0.200A	70°C/B	Sec. 2x200mA/F
U3005.03.2.09	3VA	2x115V	2x9V / 2x0.166A	70°C/B	Sec. 2x200mA/F
U3005.03.2.12	3VA	2x115V	2x12V / 2x0.125A	70°C/B	Sec. 2x125mA/F
U3005.03.2.15	3VA	2x115V	2x15V / 2x0.100A	70°C/B	Sec. 2x100mA/F
U3005.03.2.18*	3VA	2x115V	2x18V / 2x0.083A	70°C/B	Sec. 2x100mA/F
U3005.03.2.24*	3VA	2x115V	2x24V / 2x0.062A	70°C/B	Sec. 2x63mA/F

DATA SHEET

UI30/5.5

"Low Profile" encapsulated transformer

JESIVA transformers

Code:

U3005.03.2.XX

Date:

Dec 2011

www.JESIVA.com