



General tolerance: $\pm 0.5\text{mm}$

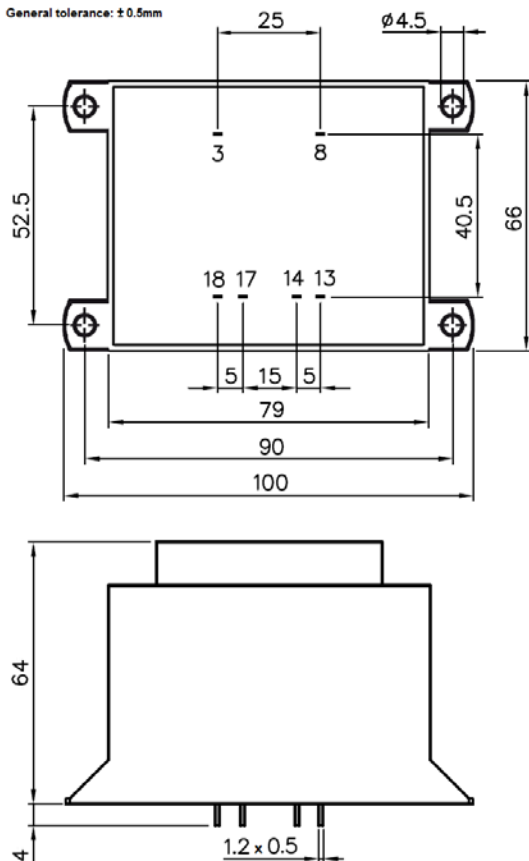



Single secondary version

Primary: pins 3 - 8
Secondary: pins 14 - 17



Double secondary version

Primary: pins 3 - 8
Secondary 1: pins 13 - 14
Secondary 2: pins 17 - 18

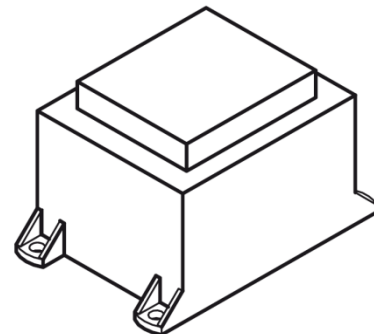

MAIN FEATURES

- Unitary insulation test at 5KV
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **1350gr**
- **Other voltages or pin-out under request**

JESIVA Part nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
E7532.60.1.06	60VA	230V	6V / 7.5A	40°C/B	Prim.315mA/T
E7532.60.1.07	60VA	230V	7.5V / 6A	40°C/B	Prim.315mA/T
E7532.60.1.09	60VA	230V	9V / 5A	40°C/B	Prim.315mA/T
E7532.60.1.12	60VA	230V	12V / 3.75A	40°C/B	Prim.315mA/T
E7532.60.1.15	60VA	230V	15V / 3A	40°C/B	Prim.315mA/T
E7532.60.1.18	60VA	230V	18V / 2.5A	40°C/B	Prim.315mA/T
E7532.60.1.24	60VA	230V	24V / 1.87A	40°C/B	Prim.315mA/T
E7532.60.2.06	60VA	230V	2x6V / 2x5A	40°C/B	Sec.2x5A/F
E7532.60.2.07	60VA	230V	2x7.5V / 2x4A	40°C/B	Sec.2x4A/F
E7532.60.2.09	60VA	230V	2x9V / 2x3.33A	40°C/B	Sec.2x4A/F
E7532.60.2.12	60VA	230V	2x12V / 2x2.5A	40°C/B	Sec.2x2.5A/F
E7532.60.2.15	60VA	230V	2x15V / 2x2A	40°C/B	Sec.2x2A/F
E7532.60.2.18	60VA	230V	2x18V / 2x1.66A	40°C/B	Sec.2x2A/F
E7532.60.2.24*	60VA	230V	2x24V / 2x1.25A	40°C/B	Sec.2x1.25A/F

DATA SHEET

EI75/32.7

Encapsulated transformer

JESIVA 
transformers

Code:

E7532.60.X.XX

Date:

Dec 2011

www.JESIVA.com