



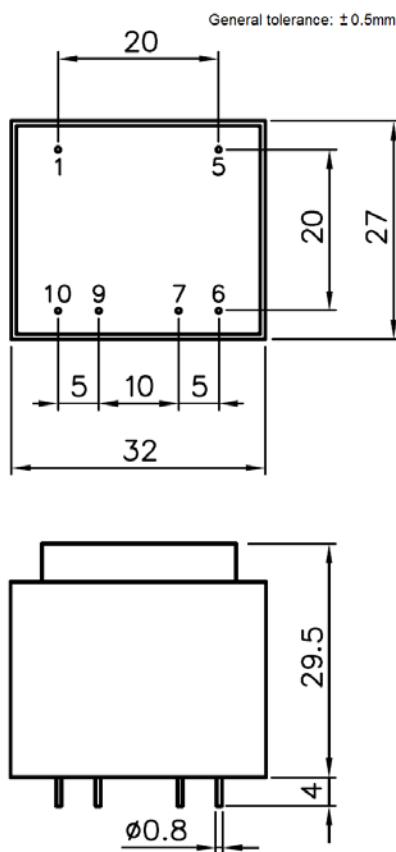



#### Single secondary version

Primary: pins 1 - 5  
Secondary: pins 7 - 9



#### Double secondary version

Primary: pins 1 - 5  
Secondary 1: pins 6 - 7  
Secondary 2: pins 9 - 10



## MAIN FEATURES:

- Unitary insulation test at 5KV
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **115gr**
- Other voltages or pin-out under request**

| JESIVA<br>Part nº | RATED<br>POWER | PRIMARY | SECONDARY        | TEMP   | Recommended<br>FUSE |
|-------------------|----------------|---------|------------------|--------|---------------------|
| E3018.23.1.06     | 2.3VA          | 230V    | 6V / 0.38A       | 70°C/B | Short-circuit proof |
| E3018.23.1.07     | 2.3VA          | 230V    | 7.5V / 0.31A     | 70°C/B | Short-circuit proof |
| E3018.23.1.09     | 2.3VA          | 230V    | 9V / 0.25A       | 70°C/B | Short-circuit proof |
| E3018.23.1.12     | 2.3VA          | 230V    | 12V / 0.19A      | 70°C/B | Short-circuit proof |
| E3018.23.1.15     | 2.3VA          | 230V    | 15V / 0.15A      | 70°C/B | Short-circuit proof |
| E3018.23.1.18     | 2.3VA          | 230V    | 18V / 0.13A      | 70°C/B | Short-circuit proof |
| E3018.23.1.24     | 2.3VA          | 230V    | 24V / 0.096A     | 70°C/B | Short-circuit proof |
| E3018.23.2.06     | 2.3VA          | 230V    | 2x6V / 2x0.19A   | 70°C/B | Short-circuit proof |
| E3018.23.2.07     | 2.3VA          | 230V    | 2x7.5V / 2x0.15A | 70°C/B | Short-circuit proof |
| E3018.23.2.09     | 2.3VA          | 230V    | 2x9V / 2x0.13A   | 70°C/B | Short-circuit proof |
| E3018.23.2.12     | 2.3VA          | 230V    | 2x12V / 2x0.096A | 70°C/B | Short-circuit proof |
| E3018.23.2.15     | 2.3VA          | 230V    | 2x15V / 2x0.076A | 70°C/B | Short-circuit proof |
| E3018.23.2.18*    | 2.3VA          | 230V    | 2x18V / 2x0.064A | 70°C/B | Short-circuit proof |
| E3018.23.2.24*    | 2.3VA          | 230V    | 2x24V / 2x0.048A | 70°C/B | Short-circuit proof |

# DATA SHEET

## EI30/18

Encapsulated transformer

**JESIVA**   
transformers

Code:

E3018.23.X.XX

Date:

Dec 2011

[www.JESIVA.com](http://www.JESIVA.com)