

DESCRIPTION: 0.1W Isolated Single Output DC/DC Converters

The TPLE-W1 series are miniature, isolated low power and high efficiency DC/DC converters in a SIP and DIP package. They offer the ideal solution in many space critical applications for board level power distribution. The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 1KVDC isolation. Operating temperature -40°C to 85°C.

FEATURES

RoHS compliant	Single output rail	1KVDC isolation
High efficiency for low power applications	SIP & DIP package styles	Power density 0.36W/cm ³
UL 94V-0 package material	Footprint from 0.69cm ²	Input voltage: 3.3V ,5V , 12V
Output voltage: 3.3V,5V, 9V, 12V ,15V	Custom solutions available	Operating temperature:-40°C to 85°C

SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Package Style
	V	V	mA	%	
TPLE0303D-W1	3.3	3.3	30.3	70	DIP
TPLE0305D-W1	3.3	5	20	80	DIP
TPLE0505D-W1	5	5	20	80	DIP
TPLE0509D-W1	5	9	11.1	82	DIP
TPLE0512D-W1	5	12	8.3	86	DIP
TPLE0515D-W1	5	15	6.7	86	DIP
TPLE0303S-W1	3.3	3.3	30.3	70	SIP
TPLE0305S-W1	3.3	5	20	80	SIP
TPLE0505S-W1	5	5	20	80	SIP
TPLE0509S-W1	5	9	11	82	SIP
TPLE0512S-W1	5	12	8.3	86	SIP
TPLE0515S-W1	5	15	6.7	86	SIP
TPLE1205D-W1	12	5	20	80	DIP
TPLE1209D-W1	12	9	11	82	DIP
TPLE1212D-W1	12	12	8.3	86	DIP
TPLE1215D-W1	12	15	6.7	86	DIP
TPLE1205S-W1	12	5	20	80	SIP
TPLE1209S-W1	12	9	11	82	SIP
TPLE1212S-W1	12	12	8.3	86	SIP
TPLE1215S-W1	12	15	6.7	86	SIP

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	3.3V input types	2.9	3.3	3.6	V
Voltage range	5V input types	4.5	5.0	5.5	V
Voltage range	12V input types	11	12	13.3	V

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	TA= -40°C to 85°C			0.1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High Vin to low Vin		1.0	1.2	%/%
Load Regulation(10% load to rated load)	5V output types			8	%
Load Regulation(10% load to rated load)	all other types			6	%

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

ABSOLUTE MAXIMUM RATINGS

Short-circuit protection	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V_{in} , TPLE3.3	5.5V
Input voltage V_{in} , TPLE05	7V
Input voltage V_{in} , TPLE12	15V

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Tested for 1 second	1000			VDC
Resistance	Viso= 1000VDC	1			GΩ


GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	All input types		80		kHz


TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	-40		85	°C
Storage		-55		130	°C
Cooling	Free air convection				

TEMPERATURE DERATING GRAPHS

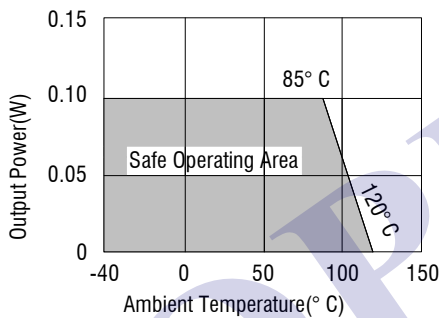


TOLERANCE ENVELOPES

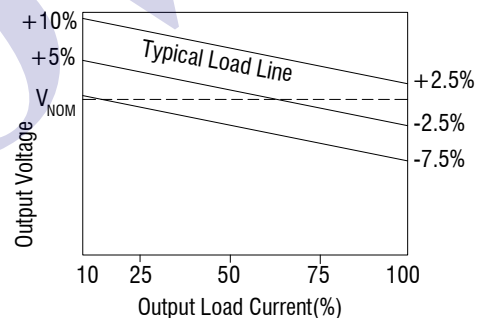


MECHANICAL DIMENSIONS

DIP Package

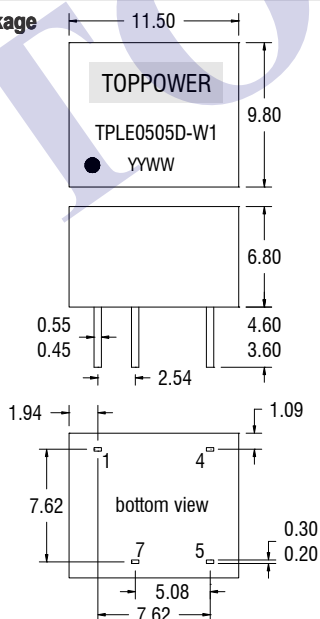

SIP Package

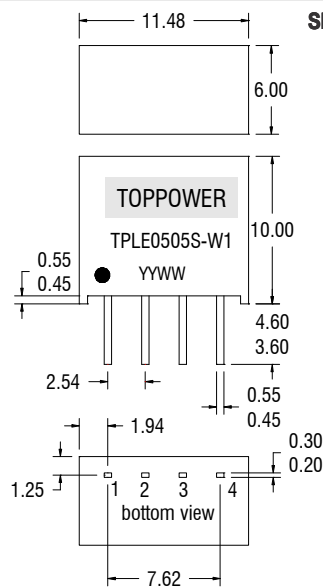

PIN CONNECTIONS-8 PIN DIP

Pin	Function
1	-Vin
4	+Vin
5	+Vout
7	-Vout

PIN CONNECTIONS-4 PIN SIP


Pin	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout

All dimensions in mm ± 0.25 mm. All pins on a 0.54 mm pitch and within ± 0.25 mm of true position.


Weight: 1.30g(SIP), 1.48g(DIP)

RECOMMENDED FOOTPRINT DETAILS

8Pin DIP Package

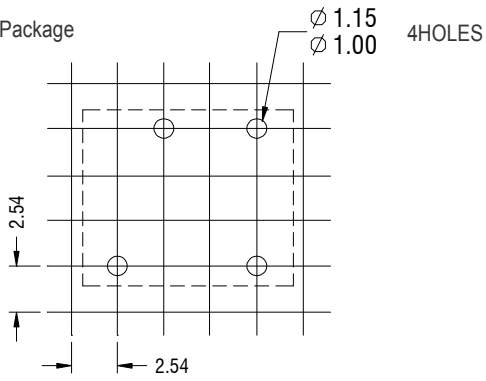


4Pin SIP Package

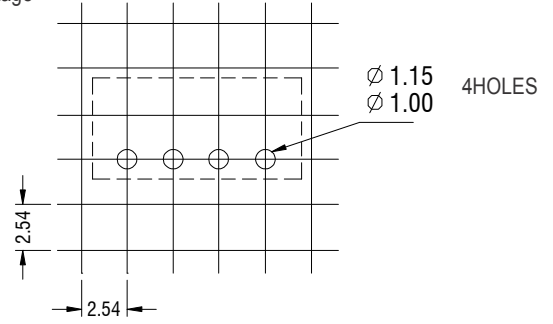


TUBE OUTLINE DIMENSIONS

8Pin DIP Tube



4Pin SIP Tube

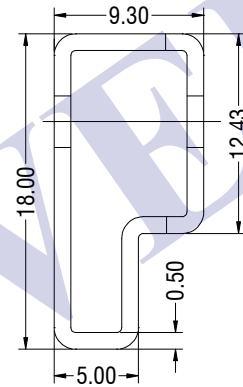

Unless otherwise stated all dimensions in mm ±0.5mm.

Tube length (8 Pin DIP) : 520mm ±2mm.

Tube length (4 Pin SIP) : 520mm ±2mm.

Tube Quantity : 35

TOPOPOWER