



General tolerance: $\pm 0.5\text{mm}$

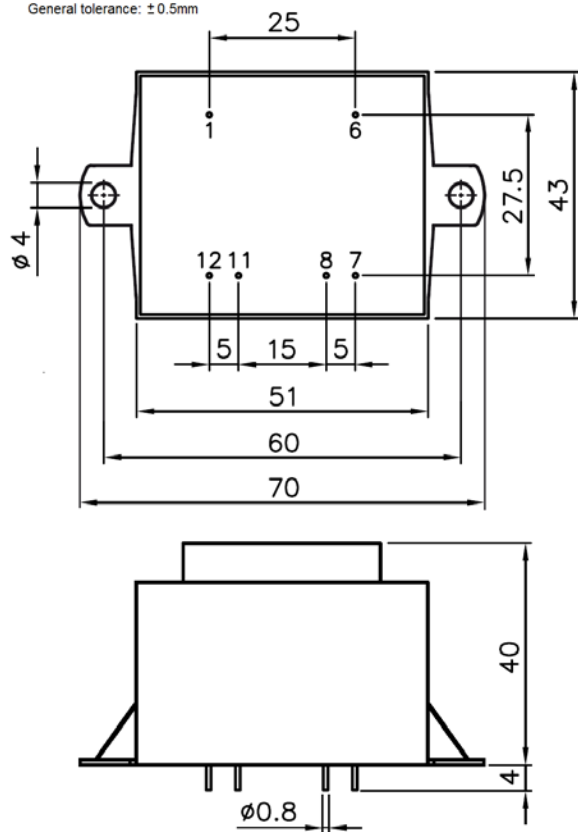



Single secondary version

Primary: pins 1 - 6
Secondary: pins 8 - 11



Double secondary version

Primary: pins 1 - 6
Secondary 1: pins 7 - 8
Secondary 2: pins 11 - 12



MAIN FEATURES:

- Unitary insulation test at 5KV
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **340gr**
- **Other voltages or pin-out under request**

JESIVA Part nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
E4820.12.1.06	12VA	230V	6V / 2.00A	40°C/B	Prim. 63mA/T
E4820.12.1.07	12VA	230V	7.5V / 1.60A	40°C/B	Prim. 63mA/T
E4820.12.1.09	12VA	230V	9V / 1.33A	40°C/B	Prim. 63mA/T
E4820.12.1.12	12VA	230V	12V / 1.00A	40°C/B	Prim. 63mA/T
E4820.12.1.15	12VA	230V	15V / 0.80A	40°C/B	Prim. 63mA/T
E4820.12.1.18	12VA	230V	18V / 0.66A	40°C/B	Prim. 63mA/T
E4820.12.1.24	12VA	230V	24V / 0.50A	40°C/B	Prim. 63mA/T
E4820.12.2.06	12VA	230V	2x6V / 2x1.00A	40°C/B	Sec. 2x1A/F
E4820.12.2.07	12VA	230V	2x7.5V / 2x0.80A	40°C/B	Sec. 2x800mA/F
E4820.12.2.09	12VA	230V	2x9V / 2x0.66A	40°C/B	Sec. 2x800mA/F
E4820.12.2.12	12VA	230V	2x12V / 2x0.50A	40°C/B	Sec. 2x500mA/F
E4820.12.2.15	12VA	230V	2x15V / 2x0.40A	40°C/B	Sec. 2x400mA/F
E4820.12.2.18	12VA	230V	2x18V / 2x0.33A	40°C/B	Sec. 2x400mA/F
E4820.12.2.24*	12VA	230V	2x24V / 2x0.25A	40°C/B	Sec. 2x250mA/F

DATA SHEET

EI48/20

Encapsulated transformer

JESIVA 
transformers

Code:

E4820.12.X.XX

Date:

Dec 2011

www.JESIVA.com