



General tolerance: $\pm 0.5\text{mm}$

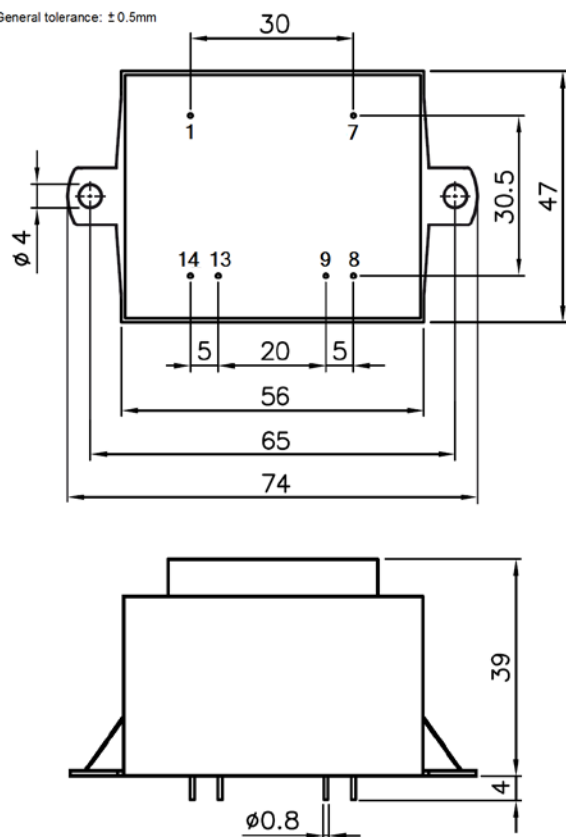



Single secondary version

Primary: pins 1 - 7
Secondary: pins 9 - 13



Double secondary version

Primary: pins 1 - 7
Secondary 1: pins 8 - 9
Secondary 2: pins 13 - 14



MAIN FEATURES:

- Unitary insulation test at 5KV
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **430gr**
- Other voltages or pin-out under request**

JESIVA Part nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
E5419.16.1.06	16VA	230V	6V / 2.66A	40°C/B	Prim. 100mA/T
E5419.16.1.07	16VA	230V	7.5V / 2.13A	40°C/B	Prim. 100mA/T
E5419.16.1.09	16VA	230V	9V / 1.78A	40°C/B	Prim. 100mA/T
E5419.16.1.12	16VA	230V	12V / 1.33A	40°C/B	Prim. 100mA/T
E5419.16.1.15	16VA	230V	15V / 1.06A	40°C/B	Prim. 100mA/T
E5419.16.1.18	16VA	230V	18V / 0.89A	40°C/B	Prim. 100mA/T
E5419.16.1.24	16VA	230V	24V / 0.66A	40°C/B	Prim. 100mA/T
E5419.16.2.06	16VA	230V	2x6V / 2x1.33A	40°C/B	Sec. 2x1.60A/F
E5419.16.2.07	16VA	230V	2x7.5V / 2x1.06A	40°C/B	Sec. 2x1.25A/F
E5419.16.2.09	16VA	230V	2x9V / 2x0.89A	40°C/B	Sec. 2x1.00A/F
E5419.16.2.12	16VA	230V	2x12V / 2x0.66A	40°C/B	Sec. 2x0.80A/F
E5419.16.2.15	16VA	230V	2x15V / 2x0.53A	40°C/B	Sec. 2x0.63A/F
E5419.16.2.18	16VA	230V	2x18V / 2x0.44A	40°C/B	Sec. 2x0.50A/F
E5419.16.2.24*	16VA	230V	2x24V / 2x0.33A	40°C/B	Sec. 2x0.40A/F

DATA SHEET

EI54/19

Encapsulated transformer

JESIVA 
transformers

Code:

E5419.16.X.XX

Date:

Dec 2011

www.JESIVA.com