




Single secondary version
 Primary: pins 1 - 8
 Secondary: pins 10 - 15

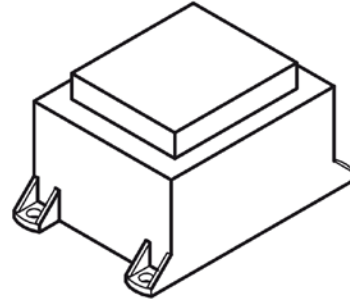

Double secondary version
 Primary: pins 1 - 8
 Secondary 1: pins 9 - 10
 Secondary 2: pins 15 - 16



MAIN FEATURES

- Unitary insulation test at **5KV**
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **800gr**
- **Other voltages or pin-out under request**

JESIVA Part nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
E6623.30.1.06	30VA	230V	6V / 5A	40°C/B	Prim.160mA/T
E6623.30.1.07	30VA	230V	7.5V / 4A	40°C/B	Prim.160mA/T
E6623.30.1.09	30VA	230V	9V / 3.3A	40°C/B	Prim.160mA/T
E6623.30.1.12	30VA	230V	12V / 2.5A	40°C/B	Prim.160mA/T
E6623.30.1.15	30VA	230V	15V / 2A	40°C/B	Prim.160mA/T
E6623.30.1.18	30VA	230V	18V / 1.6A	40°C/B	Prim.160mA/T
E6623.30.1.24	30VA	230V	24V / 1.2A	40°C/B	Prim.160mA/T
E6623.30.2.06	30VA	230V	2x6V / 2x2.5A	40°C/B	Sec.2x2.5A/F
E6623.30.2.07	30VA	230V	2x7.5V / 2x2A	40°C/B	Sec.2x2A/F
E6623.30.2.09	30VA	230V	2x9V / 2x1.66A	40°C/B	Sec.2x2A/F
E6623.30.2.12	30VA	230V	2x12V / 2x1.25A	40°C/B	Sec.2x1.25A/F
E6623.30.2.15	30VA	230V	2x15V / 2x1A	40°C/B	Sec.2x1A/F
E6623.30.2.18	30VA	230V	2x18V / 2x0.83A	40°C/B	Sec.2x1/F
E6623.30.2.24*	30VA	230V	2x24V / 2x0.62A	40°C/B	Sec.2x0.63A/F

DATA SHEET

EI66/23

Encapsulated transformer

JESIVA 
transformers

Code:

E6623.30.X.XX

Date:

Dec 2011

www.JESIVA.com