

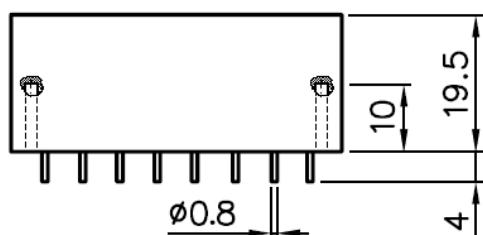


General tolerance:  $\pm 0.5\text{mm}$

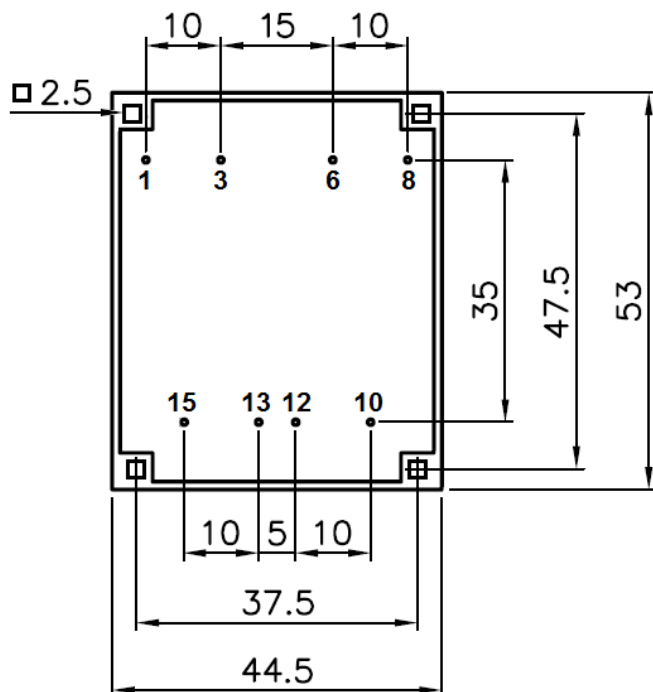



### Conexión Primario / Primary Connections

(Ejemplo / Example)

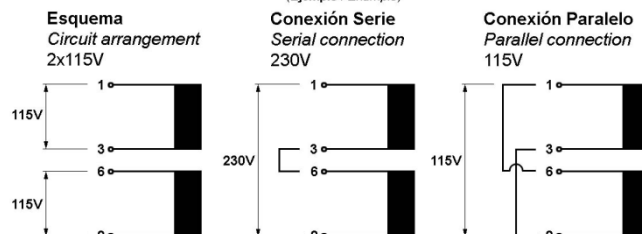

### Conexión Secundario / Secondary Connections

(Ejemplo / Example: U3007.04.2.15)

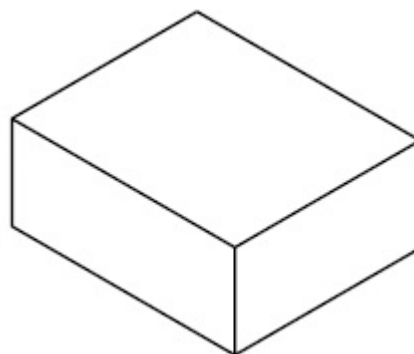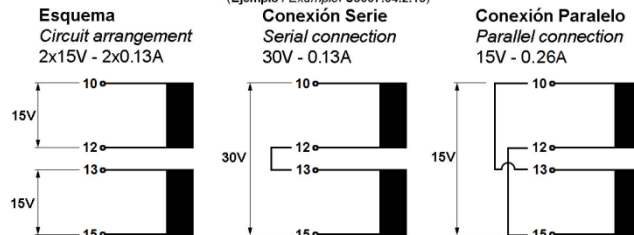

## MAIN FEATURES:

- Unitary insulation test at **5KV**
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** ( $130^{\circ}\text{C}$ )
- Protection index: **IP00**
- Weight: **155gr**
- **Other voltages or pin-out under request**

| PART Nº        | RATED POWER | PRIMARY | SECONDARY         | TEMP   | Recommended FUSE |
|----------------|-------------|---------|-------------------|--------|------------------|
| U3007.04.2.06  | 4VA         | 2x115V  | 2x6V / 2x0.333A   | 70°C/B | Sec. 2x400mA/F   |
| U3007.04.2.07  | 4VA         | 2x115V  | 2x7.5V / 2x0.266A | 70°C/B | Sec. 2x315mA/F   |
| U3007.04.2.09  | 4VA         | 2x115V  | 2x9V / 2x0.222A   | 70°C/B | Sec. 2x250mA/F   |
| U3007.04.2.12  | 4VA         | 2x115V  | 2x12V / 2x0.166A  | 70°C/B | Sec. 2x200mA/F   |
| U3007.04.2.15  | 4VA         | 2x115V  | 2x15V / 2x0.133A  | 70°C/B | Sec. 2x160mA/F   |
| U3007.04.2.18* | 4VA         | 2x115V  | 2x18V / 2x0.111A  | 70°C/B | Sec. 2x125mA/F   |
| U3007.04.2.24* | 4VA         | 2x115V  | 2x24V / 2x0.083A  | 70°C/B | Sec. 2x100mA/F   |

# DATA SHEET

## UI30/7.5

"Low Profile" encapsulated transformer

**JESIVA** transformers

Code:

U3007.04.2.XX

Date:

Dec 2011

[www.JESIVA.com](http://www.JESIVA.com)