



General tolerance: $\pm 0.5\text{mm}$

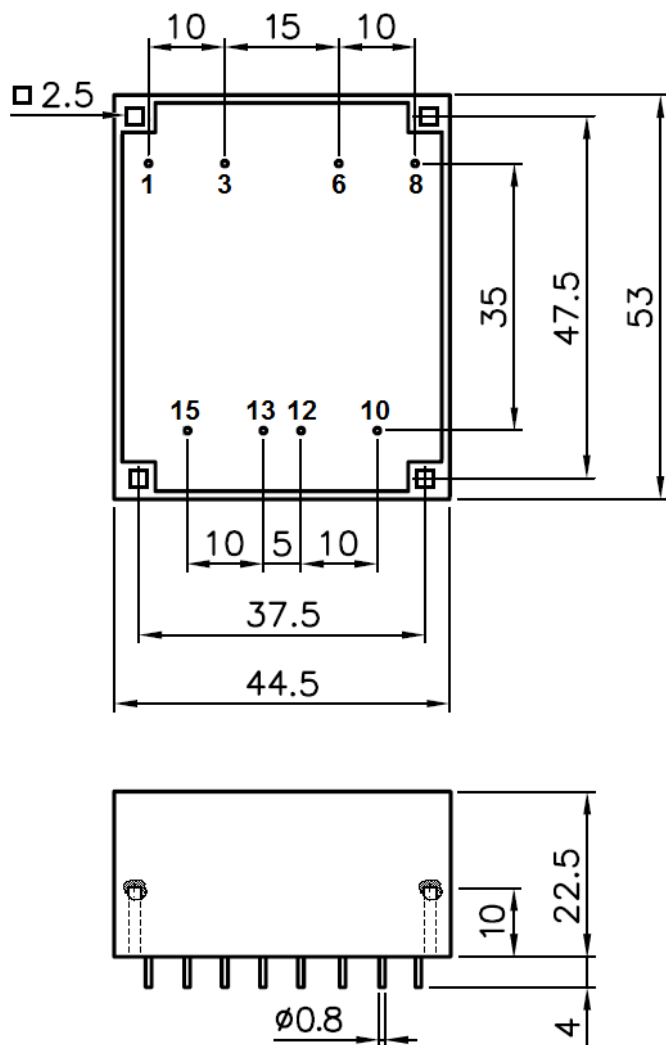


Conexión Primario / Primary Connections

(Ejemplo / Example)


Esquema
Circuit arrangement
2x115V



Conexión Serie
Serial connection
230V




Conexión Paralelo
Parallel connection
115V




Conexión Secundario / Secondary Connections

(Ejemplo / Example: U3010.06.2.15)



Esquema
Circuit arrangement
2x15V - 2x0.2A



Conexión Serie
Serial connection
30V - 0.2A



Conexión Paralelo
Parallel connection
15V - 0.4A

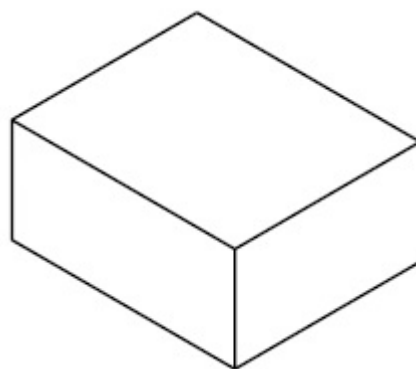

MAIN FEATURES:

- Unitary insulation test at **5KV**
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **185gr**
- Other voltages or pin-out under request**

PART Nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
U3010.06.2.06	6VA	2x115V	2x6V / 2x0.50A	70°C/B	Sec. 2x500mA/F
U3010.06.2.07	6VA	2x115V	2x7.5V / 2x0.40A	70°C/B	Sec. 2x400mA/F
U3010.06.2.09	6VA	2x115V	2x9V / 2x0.333A	70°C/B	Sec. 2x400mA/F
U3010.06.2.12	6VA	2x115V	2x12V / 2x0.25A	70°C/B	Sec. 2x250mA/F
U3010.06.2.15	6VA	2x115V	2x15V / 2x0.20A	70°C/B	Sec. 2x200mA/F
U3010.06.2.18	6VA	2x115V	2x18V / 2x0.166A	70°C/B	Sec. 2x200mA/F
U3010.06.2.24*	6VA	2x115V	2x24V / 2x0.125A	70°C/B	Sec. 2x125mA/F

DATA SHEET

UI30/10.5

"Low Profile" encapsulated transformer

JESIVA 
transformers

Code:

U3010.06.2.XX

Date:

Dec 2011

www.JESIVA.com