
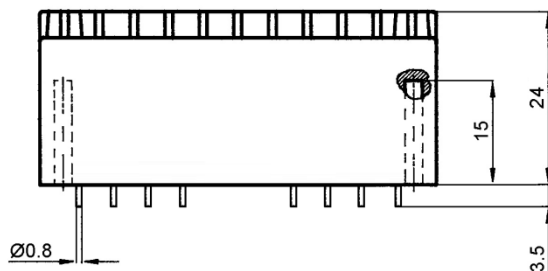



General tolerance: $\pm 0.5\text{mm}$

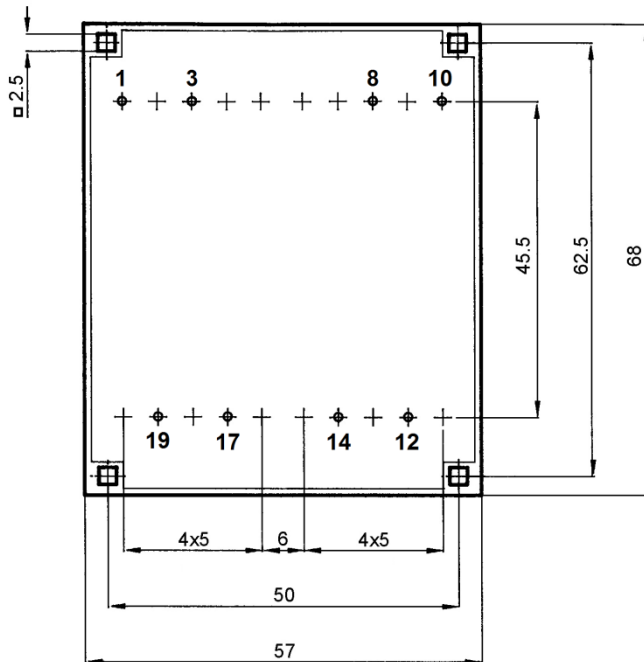

* All sizes in mm.



Conexión Primario / Primary Connections

(Ejemplo / Example)

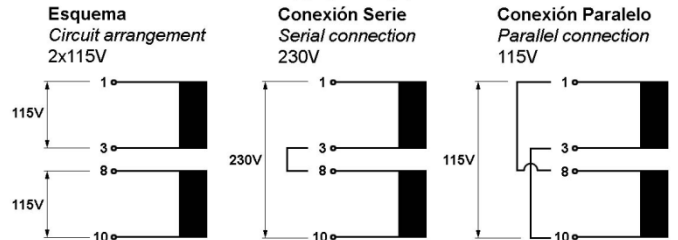

Conexión Secundario / Secondary Connections

(Ejemplo / Example : U3910.14.2.15)

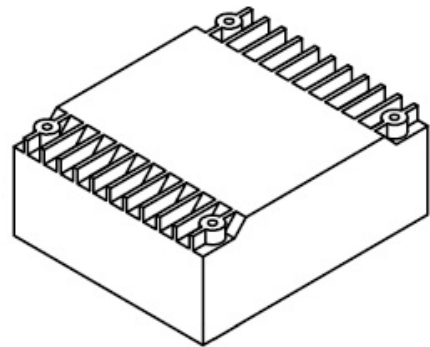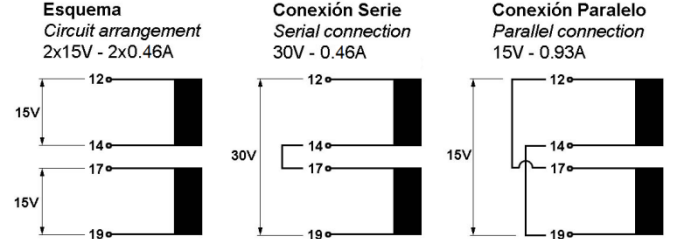

MAIN FEATURES:

- Unitary insulation test at **5KV**
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **350gr**
- Other voltages or pin-out under request**

PART Nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
U3910.14.2.06	14VA	2x115V	2x6V / 2x1.16A	50°C/B	Sec. 2x1.25A/F
U3910.14.2.07	14VA	2x115V	2x7.5V / 2x0.93A	50°C/B	Sec. 2x1A/F
U3910.14.2.09	14VA	2x115V	2x9V / 2x0.77A	50°C/B	Sec. 2x800mA/F
U3910.14.2.12	14VA	2x115V	2x12V / 2x0.58A	50°C/B	Sec. 2x630mA/F
U3910.14.2.15	14VA	2x115V	2x15V / 2x0.46A	50°C/B	Sec. 2x500mA/F
U3910.14.2.18*	14VA	2x115V	2x18V / 2x0.38A	50°C/B	Sec. 2x400mA/F
U3910.14.2.24*	14VA	2x115V	2x24V / 2x0.29A	50°C/B	Sec. 2x315mA/F

DATA SHEET

UI39/10.5

"Low Profile" encapsulated transformer

JESIVA transformers

Code:

U3910.14.2.XX

Date:

Dec 2011

www.JESIVA.com