

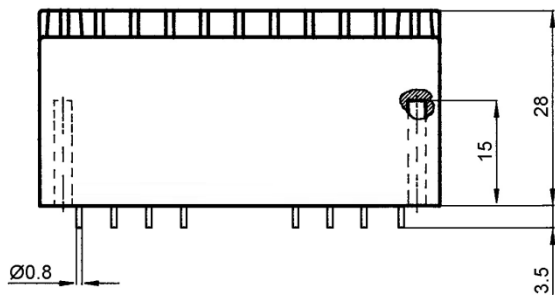


General tolerance: $\pm 0.5\text{mm}$


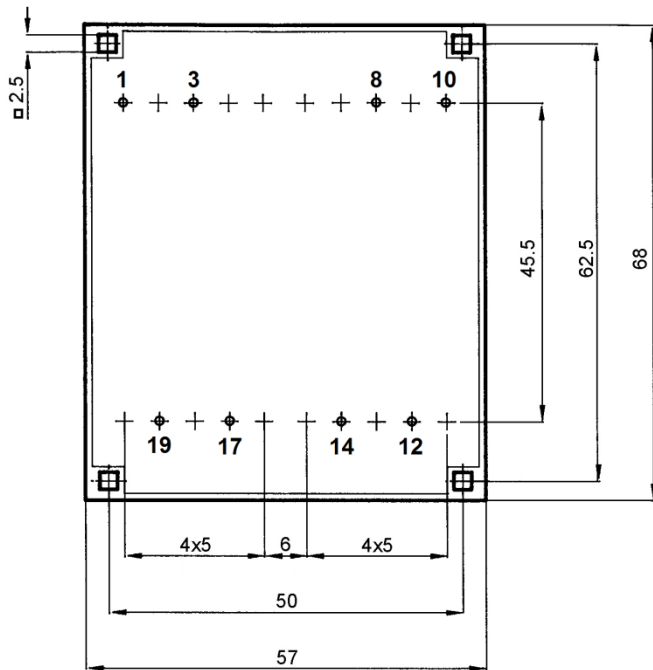


* All sizes in mm.

Conexión Primario / Primary Connections
(Ejemplo / Example)

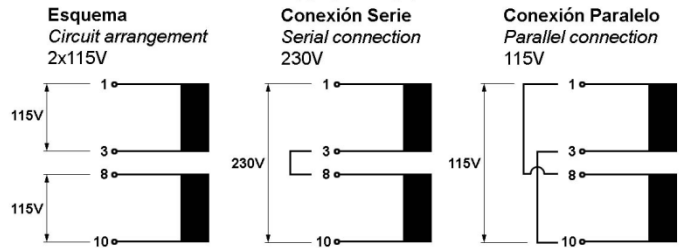

Conexión Secundario / Secondary Connections
(Ejemplo / Example : U3913.18.2.15)

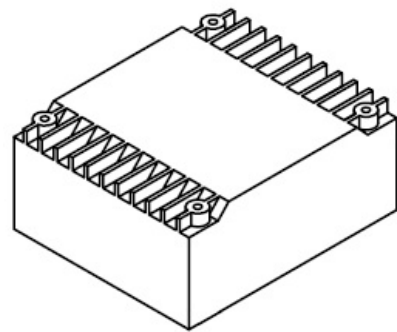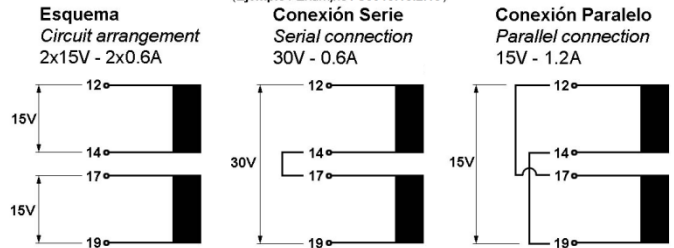

MAIN FEATURES:

- Unitary insulation test at **5KV**
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **400gr**
- **Other voltages or pin-out under request**

PART Nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
U3913.18.2.06	18VA	2x115V	2x6V / 2x1.50A	50°C/B	Sec. 2x1.6A/F
U3913.18.2.07	18VA	2x115V	2x7.5V / 2x1.20A	50°C/B	Sec. 2x1.25A/F
U3913.18.2.09	18VA	2x115V	2x9V / 2x1.00A	50°C/B	Sec. 2x1A/F
U3913.18.2.12	18VA	2x115V	2x12V / 2x0.75A	50°C/B	Sec. 2x800mA/F
U3913.18.2.15	18VA	2x115V	2x15V / 2x0.60A	50°C/B	Sec. 2x630mA/F
U3913.18.2.18	18VA	2x115V	2x18V / 2x0.50A	50°C/B	Sec. 2x500mA/F
U3913.18.2.24*	18VA	2x115V	2x24V / 2x0.37A	50°C/B	Sec. 2x400mA/F

DATA SHEET

UI39/13.5

"Low Profile" encapsulated transformer



Code:

U3913.18.2.XX

Date:

Dec 2011

www.JESIVA.com