
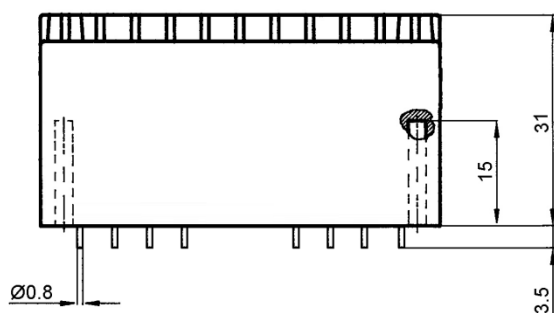



General tolerance:  $\pm 0.5\text{mm}$

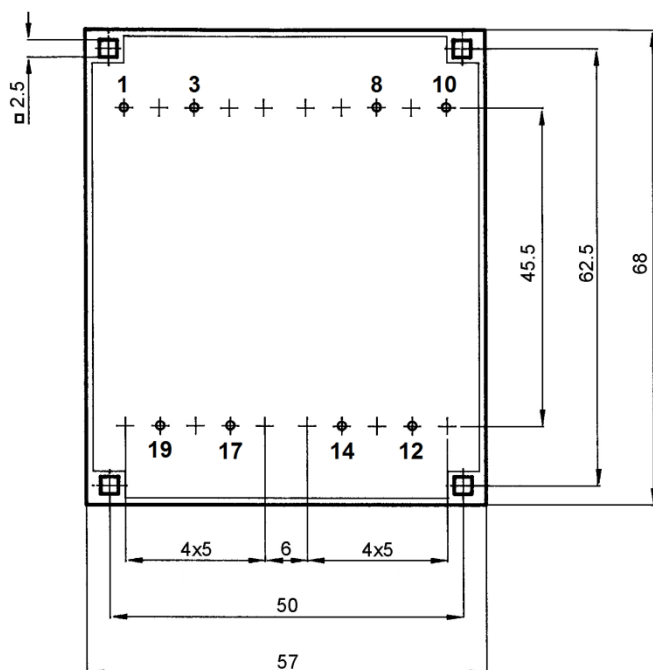

\* All sizes in mm.



### Conexión Primario / Primary Connections

(Ejemplo / Example)

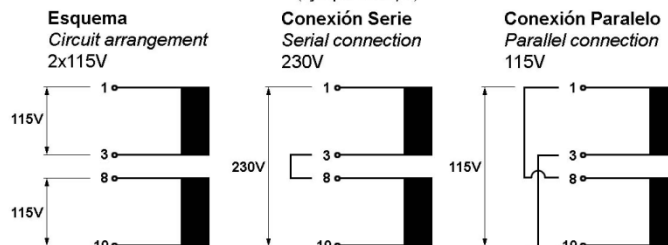

### Conexión Secundario / Secondary Connections

(Ejemplo / Example: U3917.24.2.15)

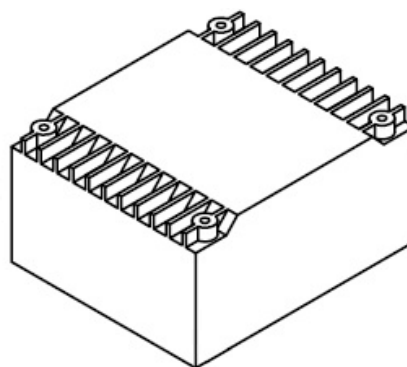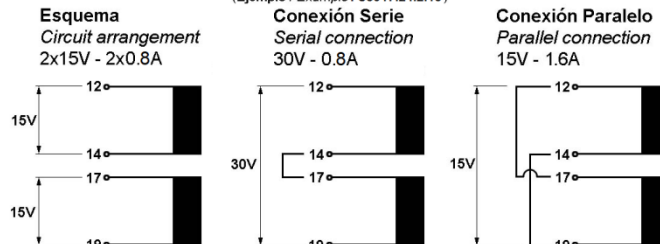

## MAIN FEATURES:

- Unitary insulation test at **5KV**
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** ( $130^{\circ}\text{C}$ )
- Protection index: **IP00**
- Weight: **480gr**
- **Other voltages or pin-out under request**

| PART Nº        | RATED POWER | PRIMARY | SECONDARY        | TEMP   | Recommended FUSE |
|----------------|-------------|---------|------------------|--------|------------------|
| U3917.24.2.06  | 24VA        | 2x115V  | 2x6V / 2x2.00A   | 50°C/B | Sec. 2x2A/F      |
| U3917.24.2.07  | 24VA        | 2x115V  | 2x7.5V / 2x1.60A | 50°C/B | Sec. 2x1.6A/F    |
| U3917.24.2.09  | 24VA        | 2x115V  | 2x9V / 2x1.33A   | 50°C/B | Sec. 2x1.6A/F    |
| U3917.24.2.12  | 24VA        | 2x115V  | 2x12V / 2x1.00A  | 50°C/B | Sec. 2x1A/F      |
| U3917.24.2.15  | 24VA        | 2x115V  | 2x15V / 2x0.80A  | 50°C/B | Sec. 2x800mA/F   |
| U3917.24.2.18  | 24VA        | 2x115V  | 2x18V / 2x0.66A  | 50°C/B | Sec. 2x800mA/F   |
| U3917.24.2.24* | 24VA        | 2x115V  | 2x24V / 2x0.50A  | 50°C/B | Sec. 2x500mA/F   |

# DATA SHEET

**UI39/17**

"Low Profile" encapsulated transformer

**JESIVA** transformers

Code:

**U3917.24.2.XX**

Date:

**Dec 2011**

[www.JESIVA.com](http://www.JESIVA.com)