



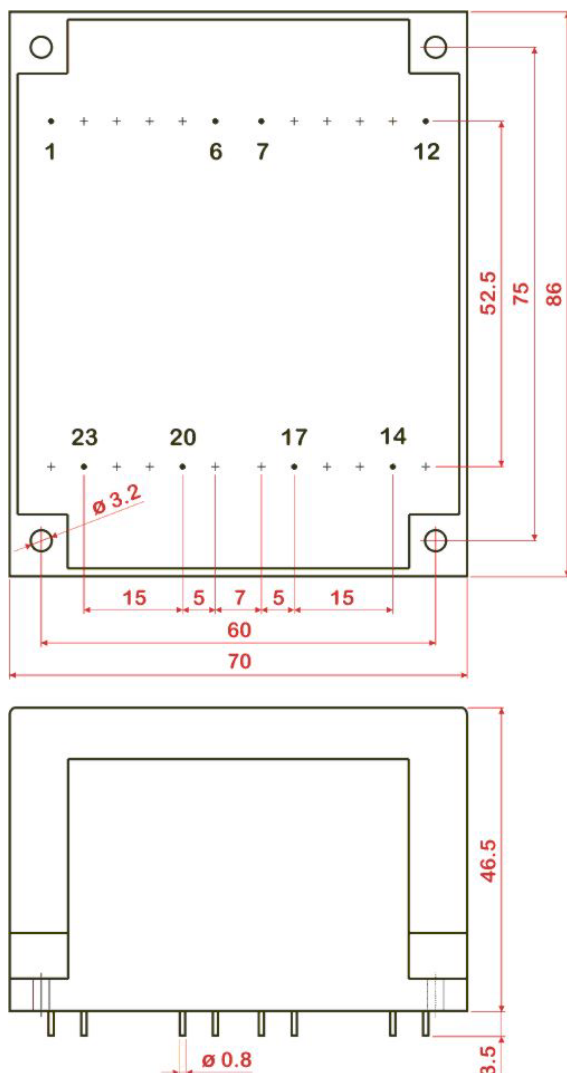



Conexión Primario / Primary Connections

(Ejemplo / Example)

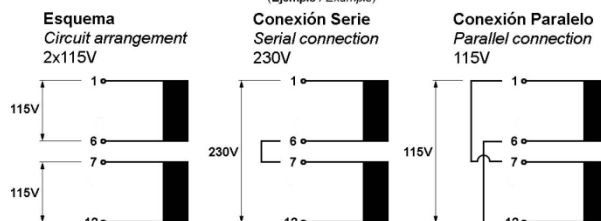

Conexión Secundario / Secondary Connections

(Ejemplo / Example: U4826.60.2.15)

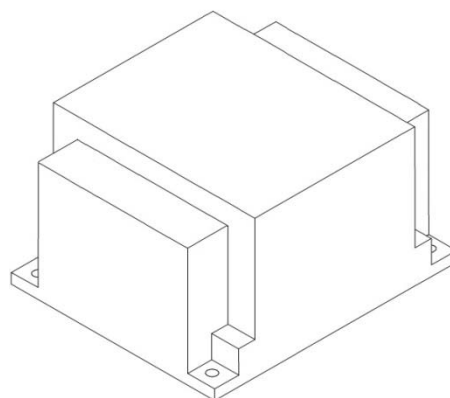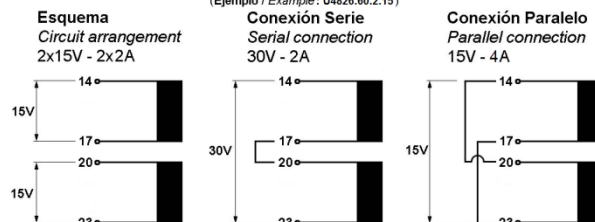

MAIN FEATURES:

- Unitary insulation test at **5KV**
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **1100gr**
- **Other voltages or pin-out under request**

PART Nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
U4826.60.2.06	60VA	2x115V	2x6V / 2x5A	50°C/B	Sec. 2x5A/F
U4826.60.2.07	60VA	2x115V	2x7.5V / 2x4A	50°C/B	Sec. 2x4A/F
U4826.60.2.09	60VA	2x115V	2x9V / 2x3.33A	50°C/B	Sec. 2x4A/F
U4826.60.2.12	60VA	2x115V	2x12V / 2x2.5A	50°C/B	Sec. 2x2.5A/F
U4826.60.2.15	60VA	2x115V	2x15V / 2x2A	50°C/B	Sec. 2x2A/F
U4826.60.2.18	60VA	2x115V	2x18V / 2x1.66A	50°C/B	Sec. 2x1.6A/F
U4826.60.2.24*	60VA	2x115V	2x24V / 2x1.25A	50°C/B	Sec. 2x1.25A/F

DATA SHEET

UI48/26

"Low Profile" encapsulated transformer

JESIVA 
transformers

Code:

U4826.60.2.XX

Date:

Dec 2011

www.JESIVA.com