

80x80x38mm RD8038 Series



外框材质:环保防火PBT
Frame:Thermoplastic PBT UL94-V0
扇叶材质:环保防火PBT
Impeller:Thermoplastic PBT UL94-V0
轴承结构:双滚珠或长寿命含油结构
Bearing system:2Ball or Long life sleeve
单体风扇重量:153g
Unit Weight:153g

可选的功能参照列表 (Available Functions)

1.马达保护(Motor protection)

RP	SS	AS	CL
●	●	●	●



2.信号输出(Signal output)

FG	RD	RD	LD
●	●	●	●


3.调速方式(Speed control mode)

PWM	TP	VC	RC	CS
●	●	●	●	●


DIMENSIONS DRAWING

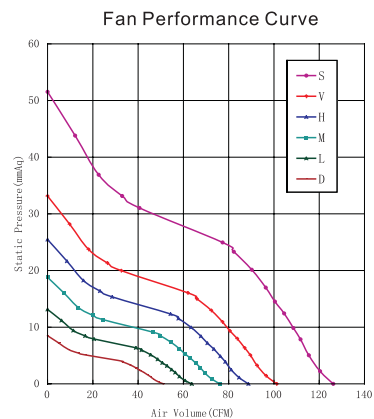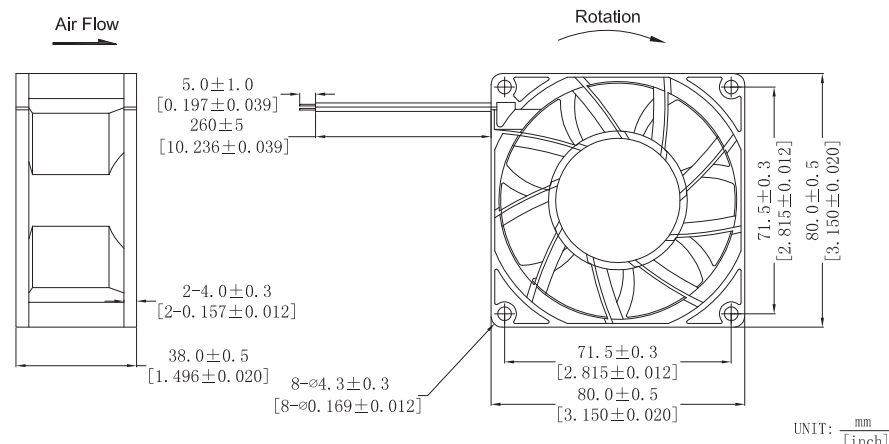

OUTLET SIDE



INLET SIDE



Part Number	Voltage(V)	Current(A)	Power(W)	Speed(RPM)	Air flow(Q)	Pressure(P)	Noise(dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	m ³ /min	(mmAq)风压 (In H ₂ O) 噪音
RD8038X12D	12(7~14)	0.26	3.12	4000	51.23	1.45	8.49 0.33 38.80
RD8038X12L		0.38	4.56	5000	63.72	1.80	13.14 0.51 44.50
RD8038X12M		0.66	7.92	6000	76.22	2.16	18.80 0.74 50.20
RD8038X12H		1.00	12.00	7000	88.72	2.51	25.46 1.00 55.70
RD8038X12VH	24(15~27)	1.24	14.88	8000	101.21	2.86	33.15 1.31 58.50
RD8038X24D		0.13	3.12	4000	51.23	1.45	8.49 0.33 38.80
RD8038X24L		0.16	3.84	5000	63.72	1.80	13.14 0.51 44.50
RD8038X24M		0.33	7.92	6000	76.22	2.16	18.80 0.74 50.20
RD8038X24H	48(35~57)	0.50	12.00	7000	88.72	2.51	25.46 1.00 55.70
RD8038X24VH		0.62	14.88	8000	101.21	2.86	33.15 1.31 58.50
RD8038X24SH		1.20	28.80	10000	126.21	3.57	51.54 2.03 64.60
RD8038X48D		0.06	2.88	4000	51.23	1.45	8.49 0.33 38.80
RD8038X48L	48(35~57)	0.08	3.84	5000	63.72	1.80	13.14 0.51 44.50
RD8038X48M		0.16	7.68	6000	76.22	2.16	18.80 0.74 50.20
RD8038X48H		0.25	12.00	7000	88.72	2.51	25.46 1.00 55.70
RD8038X48VH		0.31	14.88	8000	101.21	2.86	33.15 1.31 58.50
RD8038X48SH		0.60	28.80	10000	126.21	3.57	51.54 2.03 64.60

★ 如果您需要的转速或电压或功能不在这份清单上，请与我们联系。
If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1: The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
Notes2: Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
Notes3: Specifications are subject to change without notice.

92x92x25mm RS9225 Series



外框材质:环保防火PBT
Frame:Thermoplastic PBT UL94-V0
扇叶材质:环保防火PBT
Impeller:Thermoplastic PBT UL94-V0
轴承结构:双滚珠或长寿命含油结构
Bearing system:2Ball or Long life sleeve
单体风扇重量:78g
Unit Weight:78g

可选的功能参照列表 (Available Functions)

1.马达保护(Motor protection)

RP	SS	AS	CL
●	●	●	●



2.信号输出(Signal output)

FG	RD	RD	LD
●	●	●	●


3.调速方式(Speed control mode)

PWM	TP	VC	RC	CS
●	●	●	●	●


DIMENSIONS DRAWING

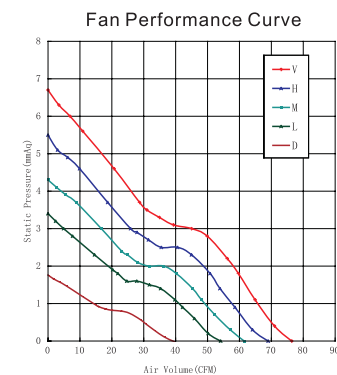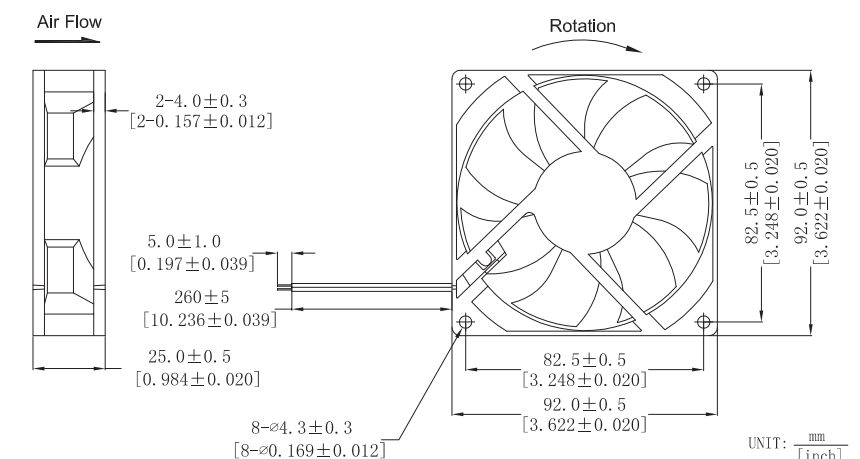

OUTLET SIDE



INLET SIDE



Part Number	Voltage(V)	Current(A)	Power(W)	Speed(RPM)	Air flow(Q)	Pressure(P)	Noise(dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	m ³ /min	(mmAq)风压 (In H ₂ O) 噪音
RS9225x12D	12(7~14)	0.12	1.44	2000	39.14	1.10	1.76 0.07 30.3
RS9225x12L		0.20	2.4	2800	54.05	1.52	3.35 0.13 36.7
RS9225x12M		0.26	3.12	3200	61.51	1.74	4.34 0.17 39.1
RS9225x12H		0.30	3.6	3600	68.97	1.95	5.46 0.21 42.8
RS9225x12VH	24(15~27)	0.44	5.28	4000	76.42	2.16	6.71 0.26 46.7
RS9225x24D		0.06	1.44	2000	39.14	1.10	1.76 0.07 30.3
RS9225x24L		0.10	2.4	2800	54.05	1.52	3.35 0.13 36.7
RS9225x24M		0.13	3.12	3200	61.51	1.74	4.34 0.17 39.1
RS9225x24H	48(35~57)	0.15	3.6	3600	68.97	1.95	5.46 0.21 42.8
RS9225x24VH		0.20	4.8	4000	76.42	2.16	6.71 0.26 46.7
RS9225x48M		0.07	3.36	3200	61.51	1.74	4.34 0.17 39.1
RS9225x48H		0.08	3.84	3600	68.97	1.95	5.46 0.21 42.8
RS9225x48VH		0.10	4.8	4000	76.42	2.16	6.71 0.26 46.7

★ 如果您需要的转速或电压或功能不在这份清单上，请与我们联系。
If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1: The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
Notes2: Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
Notes3: Specifications are subject to change without notice.