


## 450-4355 Teflon Insulated, press mount socket, for .080 (2,03) diameter pins

Recommended mounting hole .172 (4,37) ±.002 (0,05).

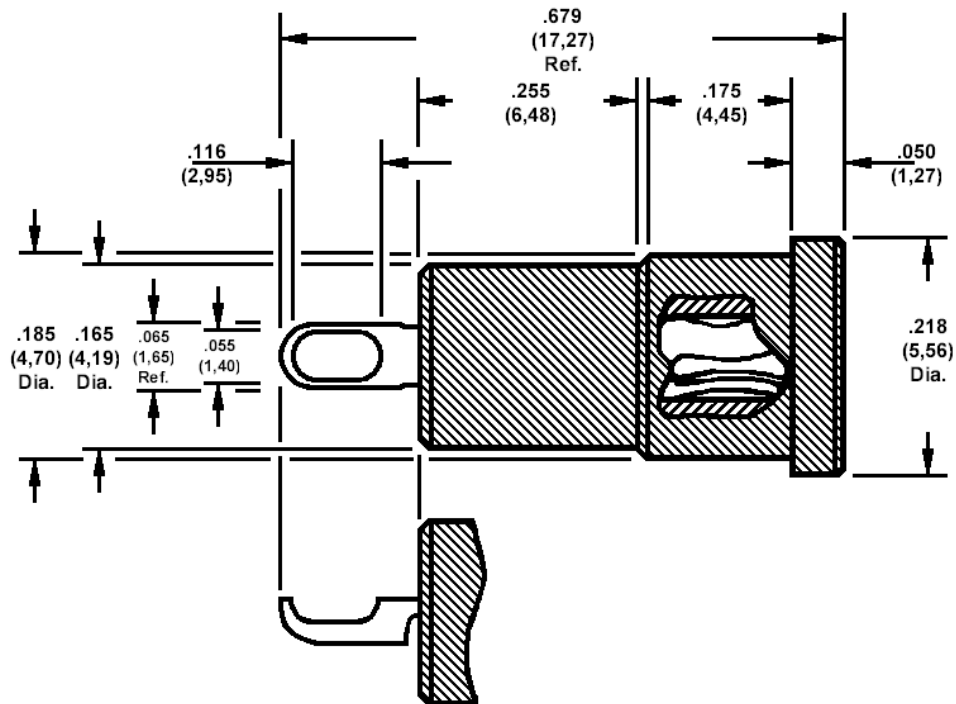

Min hole depth .350 (8,89) - with smaller through hole

How to order code  
450-4355-01-03-XX  
 Basic Part No XX = Colour

MATERIALS		
Component	Material	Finish(-03)
Spring	Beryllium copper	Gold over Nickel
Insulator	PTFE	Select colour (see below)

COLOURS (YY)			
-10	-12	-16	-19
Black	Red	Blue	White

Select colour (others available to order, consult factory)

ADDITIONAL INFORMATION			
Basic Part No	For Panel Thickness	Flashover at sea level (VRMS)	Capacitance pF
450-4355-01-03-XX	.031 (0,79) to .125 (3,18)	2000	1,0

Teflon is a registered trademark of Dupont