

ALUMINUM ELECTROLYTIC CAPACITOR

CD11GE

FEATURES


- 105°C 8000-10000 hours



SPECIFICATIONS

ITEMS	PERFORMANCE CHARACTERISTICS														
Rated Voltage	DC160~450V														
Capacitance	± 20%														
Dissipation Factor	<table border="1"> <tr> <td>Raged Voltage (V)</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>Tan δ</td> <td>0.08</td> <td>0.08</td> <td>0.08</td> <td>0.08</td> <td>0.8</td> <td>0.1</td> </tr> </table>	Raged Voltage (V)	160	200	250	350	400	450	Tan δ	0.08	0.08	0.08	0.08	0.8	0.1
	Raged Voltage (V)	160	200	250	350	400	450								
Tan δ	0.08	0.08	0.08	0.08	0.8	0.1									
Leakage Current	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>160~400V</td> <td>450V</td> </tr> <tr> <td>Leakage Current</td> <td>IC ≤ 0.02CV + 10 μA (160~400V) after 2minutes</td> <td>IC ≤ 0.03CV + 10 μA (160~400V) after 2minutes</td> </tr> </table>	Rated Voltage (V)	160~400V	450V	Leakage Current	IC ≤ 0.02CV + 10 μA (160~400V) after 2minutes	IC ≤ 0.03CV + 10 μA (160~400V) after 2minutes								
	Rated Voltage (V)	160~400V	450V												
Leakage Current	IC ≤ 0.02CV + 10 μA (160~400V) after 2minutes	IC ≤ 0.03CV + 10 μA (160~400V) after 2minutes													
Load Life (105°C)	After application of the voltage at 105°C 8000~10000hours, the capacitors shall meet the below requirement														
	<table border="1"> <tr> <td>Time</td> <td>105°C 8000~10000hours</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ± 20% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> </table>	Time	105°C 8000~10000hours	Leakage Current	Not more than the specified value.	Capacitance Change	Within ± 20% of the initial value	Dissipation Factor	Not more than 200% of the specified value.						
	Time	105°C 8000~10000hours													
	Leakage Current	Not more than the specified value.													
Capacitance Change	Within ± 20% of the initial value														
Dissipation Factor	Not more than 200% of the specified value.														
Shelf Life (105 ± 2°C)	After leaving capacitors under no load at 105°C for 8000 hours, capacitors shall meet the specified value for load life characteristics listed above														

DIMENSIONS

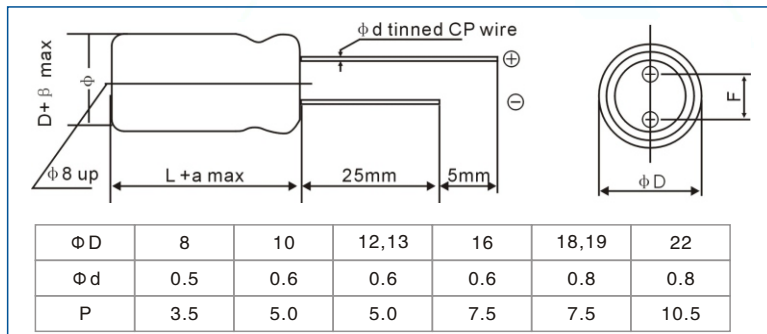

MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient factor for ripple current

W.V Factor	Frequency	120Hz	1KHz	10KHz	100KHz
160~450		0.5	0.8	0.9	1.00

CASE SIZE DXL(MM) RIPPLE CURRENT (MA, 150°C/120HZ)

WV/V Cap/ μ F	160		200		250		350		400		450	
	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)
1.0	6.3X12	90	6.3X12	90	6.3X12	90	8x12	100	10x12	100	8x116	100
1.5	6.3X12	100	6.3X12	100	8X12	110	8x12	110	10x12	110	10x12	110
1.8	6.3X12	110	6.3X12	110	8X12	120	8x16	120	10x12	120	10x12	120
2.2	6.3X12	120	6.3X12	120	8X12	140	8x16	130	10x16	130	10x16	130
2.8	8X12	130	8X12	130	10X12	160	10x12	150	10x16	150	10x16	130
3.3	8X12	150	8X12	150	10X12	180	10x17	160	10x17	160	10x17	140
4.7	10X12	170	10X12	180	10X12	200	10x17	180	10x20	180	10x20	150
5.6	8X16	190	8X16	190	8X16	230	10x20	200	12x20	200	12x20	160
6.8	8X16	200	8X16	200	10X16	250	10x20	220	12x20	220	12x20	170
8.2	10X16	250	10X16	250	10X16	260	12x20	260	12.5x20	260	12x20	280
10	10X17	280	10X17	280	10X20	280	13x20	280	13x20	280	13x20	330
15	10X20	440	10X20	450	12X20	480	13x20	350	13x25	350	13x25	430
22	12X20	520	12X20	520	13X20	620	13x25	450	16x25	450	16x30	570
33	13X20	520	13X20	620	13X25	620	16x25	660	16x30	660	16x35	710
47	13X25	680	13X25	680	16X25	720	16x30	860	18x35	860	18x35	890
68	16X20	780	16X25	780	16X30	920	16x35	1100	18x35	1100	--	--
100	16X25	1140	16X30	1140	18X30	1250	--	--	--	--	--	--
150	18X35	1380	18X35	1480	--	--	--	--	--	--	--	--