



FEATURES:

- Wide 2:1 input range
- 24 Pin DIP Package
- High efficiency up to 82%
- Metal package
- Operating temperature -40°C to + 85°C
- Input / Output isolation 1500 or 3500VDC
- Pin compatible with multiple manufacturers
- Continuous short circuit protection



Models
Single output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Capacitive load, max (µF)	Efficiency (%)
AM3T-0503S-VZ	4.5-9	3.3	800	2200	73
AM3T-0505S-VZ	4.5-9	5	600	2200	70
AM3T-0507S-VZ	4.5-9	7.2	417	1000	72
AM3T-0509S-VZ	4.5-9	9	333	470	72
AM3T-0512S-VZ	4.5-9	12	250	470	74
AM3T-0515S-VZ	4.5-9	15	200	470	74
AM3T-0518S-VZ	4.5-9	18	167	220	74
AM3T-0524S-VZ	4.5-9	24	125	220	70
AM3T-1203S-VZ	9-18	3.3	800	2200	73
AM3T-1205S-VZ	9-18	5	600	2200	76
AM3T-1207S-VZ	9-18	7.2	417	1000	74
AM3T-1209S-VZ	9-18	9	333	470	77
AM3T-1212S-VZ	9-18	12	250	470	79
AM3T-1215S-VZ	9-18	15	200	470	79
AM3T-1218S-VZ	9-18	18	167	220	79
AM3T-1224S-VZ	9-18	24	125	220	79
AM3T-2403S-VZ	18-36	3.3	800	2200	70
AM3T-2405S-VZ	18-36	5	600	2200	80
AM3T-2407S-VZ	18-36	7.2	417	1000	77
AM3T-2409S-VZ	18-36	9	333	470	80
AM3T-2412S-VZ	18-36	12	250	470	82
AM3T-2415S-VZ	18-36	15	200	470	82
AM3T-2418S-VZ	18-36	18	167	220	79
AM3T-2424S-VZ	18-36	24	125	220	80
AM3T-4803S-VZ	36-72	3.3	800	2200	77
AM3T-4805S-VZ	36-72	5	600	2200	77
AM3T-4807S-VZ	36-72	7.2	417	1000	78
AM3T-4809S-VZ	36-72	9	333	470	78
AM3T-4812S-VZ	36-72	12	250	470	80
AM3T-4815S-VZ	36-72	15	200	470	80
AM3T-4818S-VZ	36-72	18	167	220	77
AM3T-4824S-VZ	36-72	24	125	220	80
AM3T-0503SH35-VZ	4.5-9	3.3	800	2200	73
AM3T-0505SH35-VZ	4.5-9	5	600	2200	70
AM3T-0507SH35-VZ	4.5-9	7.2	417	1000	72
AM3T-0509SH35-VZ	4.5-9	9	333	470	72
AM3T-0512SH35-VZ	4.5-9	12	250	470	74
AM3T-0515SH35-VZ	4.5-9	15	200	470	74
AM3T-0518SH35-VZ	4.5-9	18	167	220	74
AM3T-0524SH35-VZ	4.5-9	24	125	220	70
AM3T-1203SH35-VZ	9-18	3.3	800	2200	73
AM3T-1205SH35-VZ	9-18	5	600	2200	76
AM3T-1207SH35-VZ	9-18	7.2	417	1000	74
AM3T-1209SH35-VZ	9-18	9	333	470	77
AM3T-1212SH35-VZ	9-18	12	250	470	79
AM3T-1215SH35-VZ	9-18	15	200	470	79
AM3T-1218SH35-VZ	9-18	18	167	220	79

Models

Single output (continued)

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Capacitive load, max (µF)	Efficiency (%)
AM3T-1224SH35-VZ	9-18	24	125	220	79
AM3T-2403SH35-VZ	18-36	3.3	800	2200	70
AM3T-2405SH35-VZ	18-36	5	600	2200	80
AM3T-2407SH35-VZ	18-36	7.2	417	1000	77
AM3T-2409SH35-VZ	18-36	9	333	470	80
AM3T-2412SH35-VZ	18-36	12	250	470	82
AM3T-2415SH35-VZ	18-36	15	200	470	82
AM3T-2418SH35-VZ	18-36	18	167	220	79
AM3T-2424SH35-VZ	18-36	24	125	220	80
AM3T-4803SH35-VZ	36-72	3.3	800	2200	77
AM3T-4805SH35-VZ	36-72	5	600	2200	77
AM3T-4807SH35-VZ	36-72	7.2	417	1000	78
AM3T-4809SH35-VZ	36-72	9	333	470	78
AM3T-4812SH35-VZ	36-72	12	250	470	80
AM3T-4815SH35-VZ	36-72	15	200	470	80
AM3T-4818SH35-VZ	36-72	18	167	220	77
AM3T-4824SH35-VZ	36-72	24	125	220	80

Models

Dual output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Capacitive load, max (µF)	Efficiency (%)
AM3T-0505D-VZ	4.5-9	±5	±300	±1000	69
AM3T-0507D-VZ	4.5-9	±7.2	±208	±220	67
AM3T-0509D-VZ	4.5-9	±9	±167	±220	70
AM3T-0512D-VZ	4.5-9	±12	±125	±220	72
AM3T-0515D-VZ	4.5-9	±15	±100	±220	74
AM3T-0518D-VZ	4.5-9	±18	±83	±220	74
AM3T-0524D-VZ	4.5-9	±24	±63	±100	70
AM3T-1205D-VZ	9-18	±5	±300	±1000	76
AM3T-1207D-VZ	9-18	±7.2	±208	±220	77
AM3T-1209D-VZ	9-18	±9	±167	±220	77
AM3T-1212D-VZ	9-18	±12	±125	±220	79
AM3T-1215D-VZ	9-18	±15	±100	±220	79
AM3T-1218D-VZ	9-18	±18	±83	±220	78
AM3T-1224D-VZ	9-18	±24	±63	±100	79
AM3T-2405D-VZ	18-36	±5	±300	±1000	80
AM3T-2407D-VZ	18-36	±7.2	±208	±220	78
AM3T-2409D-VZ	18-36	±9	±167	±220	80
AM3T-2412D-VZ	18-36	±12	±125	±220	82
AM3T-2415D-VZ	18-36	±15	±100	±220	82
AM3T-2418D-VZ	18-36	±18	±83	±220	80
AM3T-2424D-VZ	18-36	±24	±63	±100	80
AM3T-4805D-VZ	36-72	±5	±300	±1000	78
AM3T-4807D-VZ	36-72	±7.2	±208	±220	78
AM3T-4809D-VZ	36-72	±9	±167	±220	79
AM3T-4812D-VZ	36-72	±12	±125	±220	80
AM3T-4815D-VZ	36-72	±15	±100	±220	80
AM3T-4818D-VZ	36-72	±18	±83	±220	78
AM3T-4824D-VZ	36-72	±24	±63	±100	80
AM3T-0505DH35-VZ	4.5-9	±5	±300	±1000	69
AM3T-0507DH35-VZ	4.5-9	±7.2	±208	±220	67
AM3T-0509DH35-VZ	4.5-9	±9	±167	±220	70
AM3T-0512DH35-VZ	4.5-9	±12	±125	±220	72
AM3T-0515DH35-VZ	4.5-9	±15	±100	±220	74
AM3T-0518DH35-VZ	4.5-9	±18	±83	±220	74

Models

Dual output (continued)

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Capacitive load, max (μF)	Efficiency (%)
AM3T-0524DH35-VZ	4.5-9	±24	±63	±100	70
AM3T-1205DH35-VZ	9-18	±5	±300	±1000	76
AM3T-1207DH35-VZ	9-18	±7.2	±208	±220	77
AM3T-1209DH35-VZ	9-18	±9	±167	±220	77
AM3T-1212DH35-VZ	9-18	±12	±125	±220	79
AM3T-1215DH35-VZ	9-18	±15	±100	±220	79
AM3T-1218DH35-VZ	9-18	±18	±83	±220	78
AM3T-1224DH35-VZ	9-18	±24	±63	±100	79
AM3T-2405DH35-VZ	18-36	±5	±300	±1000	80
AM3T-2407DH35-VZ	18-36	±7.2	±208	±220	78
AM3T-2409DH35-VZ	18-36	±9	±167	±220	80
AM3T-2412DH35-VZ	18-36	±12	±125	±220	82
AM3T-2415DH35-VZ	18-36	±15	±100	±220	82
AM3T-2418DH35-VZ	18-36	±18	±83	±220	80
AM3T-2424DH35-VZ	18-36	±24	±63	±100	80
AM3T-4805DH35-VZ	36-72	±5	±300	±1000	78
AM3T-4807DH35-VZ	36-72	±7.2	±208	±220	78
AM3T-4809DH35-VZ	36-72	±9	±167	±220	79
AM3T-4812DH35-VZ	36-72	±12	±125	±220	80
AM3T-4815DH35-VZ	36-72	±15	±100	±220	80
AM3T-4818DH35-VZ	36-72	±18	±83	±220	78
AM3T-4824DH35-VZ	36-72	±24	±63	±100	80

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5	4.5-9		VDC
	12	9-18		
	24	18-36		
	48	36-72		
Filter	π (Pi) Network			
Start-up time		20		ms
Absolute Maximum Rating	5 Vin	-0.7-15		VDC
	12 Vin	-0.7-24		
	24 Vin	-0.7-40		
	48 Vin	-0.7-80		
Peak Input Voltage time		15		ms

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	3 sec		1500 (3500 'H35' model)	VDC
Resistance		> 1000		MOhm
Capacitance		60		pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±1		%
Voltage balance	Balanced Load	±1		%
Short circuit protection	Continuous			
Short circuit restart	Auto Recovery			
Line voltage regulation		±0.5		%
Load voltage regulation		±0.5		%
Temperature coefficient		±0.02		%/°C
Ripple & Noise	At 20MHz Bandwidth	60		mV p-p

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	100-400		KHz
Operating temperature	Full Load (see derating chart)	-40 to +85		°C
Storage temperature		-40 to +125		°C
Max Case temperature			100	°C
Cooling	Free air convection			
Humidity			95	%
Case material	Nickel coated copper			
Weight		15		g
Dimensions(L x W x H)	Tolerance ±0.5 mm or ±0.02 inches	1.25 x 0.8 x 0.4 inches	31.75 x 20.32 x 10.16 mm	
MTBF	>2,200,000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)			

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.


Safety Specifications

Parameters	
Agency approvals	CE
Standards	Designed to meet IEC 60950-1


Pin Out Specifications

Pin	1500 VDC Isolation		3500 VDC Isolation	
	Single	Dual	Single	Dual
1	+V Input	+V Input	No Pin	No Pin
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	No pin	No pin	No pin	Common
10	-V Output	Common	No pin	No pin
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	No pin	No pin
13	-V Input	-V Input	No pin	No pin
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	No pin	No pin
16	No pin	No pin	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	No pin	No pin

Dimensions

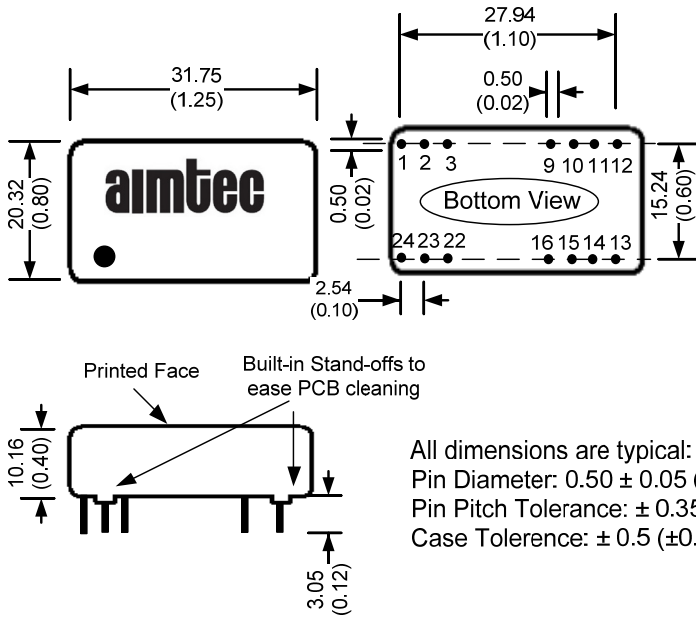

Derating

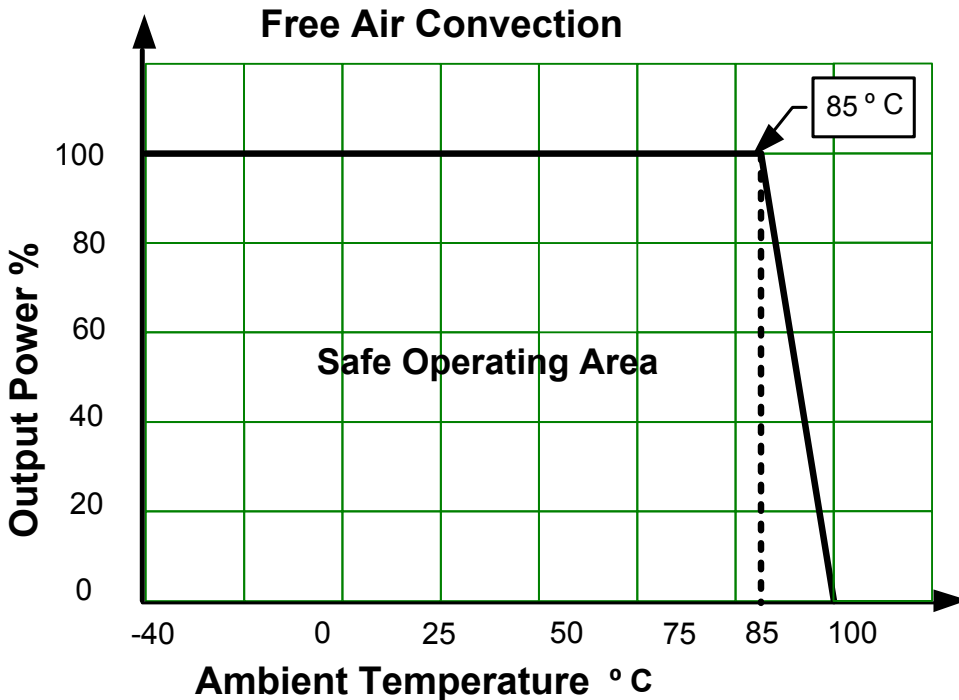

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.