


IRON POWDER CORE SERIES PRODUCTS


# Toroidal Cores

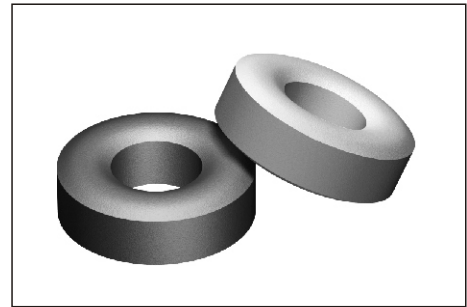


## STANDARD SPECIFICATIONS

Part Number	$A_L$ nH/N <sup>2</sup>	OD mm	ID mm	HT mm	Le cm	Ae cm <sup>2</sup>	V cm <sup>3</sup>
KT51-2B	13.8	12.7	5.08	6.35	2.79	.223	.622
KT51-6B	10.2	12.7	5.08	6.35	2.79	.223	.622
KT51-8C	37.0	12.7	5.08	6.35	2.79	.223	.622
KT51-8/93	37.0	12.7	5.08	6.35	2.79	.223	.622
KT51-18C	55.0	12.7	5.08	6.35	2.79	.223	.622
KT51-26C	83.0	12.7	5.08	6.35	2.79	.223	.622
KT51-40C	67.0	12.7	5.08	6.35	2.79	.223	.622
KT51-52C	75.0	12.7	5.08	6.35	2.79	.223	.622
KT60-2	6.5	15.2	8.53	5.94	3.74	.187	.699
KT60-2/93	6.5	15.2	8.53	5.94	3.74	.187	.699
KT60-8	19.0	15.2	8.53	5.94	3.74	.187	.699
KT60-8/93	19.0	15.2	8.53	5.94	3.74	.187	.699
KT60-18	34.5	15.2	8.53	5.94	3.74	.187	.699
KT60-26	50.0	15.2	8.53	5.94	3.74	.187	.699
KT60-40	41.5	15.2	8.53	5.94	3.74	.187	.699
KT60-52	47.0	15.2	8.53	5.94	3.74	.187	.699
KT60-26D	97.0	15.2	8.53	11.9	3.74	.374	1.40
KT60-52D	94.0	15.2	8.53	11.9	3.74	.374	1.40
KT68-1	11.5	17.5	9.40	4.83	4.23	.179	.759
KT68-2	5.7	17.5	9.40	4.83	4.23	.179	.759
KT68-2/93	5.7	17.5	9.40	4.83	4.23	.179	.759
KT68-3	19.5	17.5	9.40	4.83	4.23	.179	.759
KT68-6	4.7	17.5	9.40	4.83	4.23	.179	.759
KT68-7	5.2	17.5	9.40	4.83	4.23	.179	.759
KT68-8	19.5	17.5	9.40	4.83	4.23	.179	.759
KT68-8/93	19.5	17.5	9.40	4.83	4.23	.179	.759

## TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



### TYPICAL PART No.

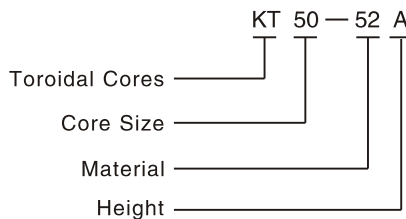

Le: Mean Magnetic Path Length  
 Ae: Cross Section Area  
 Ve: Core Volume