


## IRON POWDER CORE SERIES PRODUCTS

# Toroidal Cores


### STANDARD SPECIFICATIONS

Part Number	$A_L$ nH/N <sup>2</sup>	OD mm	ID mm	HT mm	Le cm	Ae cm <sup>2</sup>	V cm <sup>3</sup>
KT106-18B	91.0	26.9	14.5	14.6	6.49	.858	5.57
KT106-26B	124.0	26.9	14.5	14.6	6.49	.858	5.57
KT106-40B	106.0	26.9	14.5	14.6	6.49	.858	5.57
KT106-52B	124.0	26.9	14.5	14.6	6.49	.858	5.57
KT124-26	58.0	31.6	18.0	7.11	7.75	.459	3.55
KT130-1	20.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-2	11.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-2/93	11.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-3	35.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-6	9.6	33.0	19.8	11.1	8.28	.698	5.78
KT130-7	10.3	33.0	19.8	11.1	8.28	.698	5.78
KT130-8	35.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-8/93	35.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-15	25.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-18	58.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-26	81.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-28	25.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-33	33.5	33.0	19.8	11.1	8.28	.698	5.78
KT130-38	90.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-40	69.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-45	105.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-52	79.0	33.0	19.8	11.1	8.28	.698	5.78
KT130-26A	41.0	33.0	19.8	5.72	8.28	.361	2.99
KT130-40A	34.0	33.0	19.8	5.72	8.28	.361	2.99
KT131-8	52.5	33.0	16.3	11.1	7.72	.885	6.84
KT131-8/93	52.5	33.0	16.3	11.1	7.72	.885	6.84

### TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



#### TYPICAL PART No.

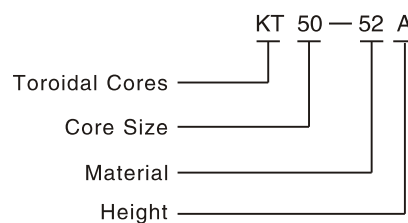

Le: Mean Magnetic Path Length

Ae: Cross Section Area

Ve: Core Volume