

Keysight Technologies

USB Preamplifiers

U7227/8A 10 MHz to 4 GHz

U7227/8C 100 MHz to 26.5 GHz

U7227/8F 2 to 50 GHz

Technical Overview



Key Features and Benefits

- Automatic gain correction value with temperature compensation and transfer of calibration data (noise figure and S-parameters) through USB plug and play features for improved noise figure measurements with Keysight N9040/1B UXA and N9010/20/30A/B X-Series signal analyzers
- Excellent noise figure and optimized gain with the X-Series signal analyzers; improves measurement accuracy and minimizes uncertainty
- Provides ultra-broadband operating frequency from 10 MHz up to 50 GHz for various applications
- Rugged and portable design for benchtop measurements or remote front-end applications

Benchtop/Remote Front End Use

In many RF systems, noise figure is known as a key parameter for characterizing a receiver and its ability to detect weak incoming signals combined with self-generated noise. The presence of these signals are typically low level, so adding a reliable preamplifier will greatly increase the sensitivity of your measurement system.

The Keysight Technologies, Inc. U7227/8A/C/F USB preamplifiers are designed to increase signal analyzer sensitivity for measuring low-level signals by reducing instrument noise figure. Reduced instrument noise figure also reduces noise figure measurement uncertainty in most cases. Powered on a USB platform, compact and portable, the USB preamplifiers eliminates the need for an external power supply and is ideal for either benchtop measurements or on remote front end applications.

When connected to the Keysight X-Series signal analyzers, the USB preamplifiers can automatically configure the signal analyzer to detect the specific preamplifier connected. The preamplifier will then download the embedded calibration data such as gain, noise figure and S-parameters. The calibration data provides accurate correction data and more repeatable results for each measurement made.

The combined solution of the Keysight U7227/8A/C/F USB preamplifiers and the X-Series signal analyzers delivers the most efficient test setup, highest accuracy and lowest measurement uncertainty for noise figure measurement applications up to 50 GHz.

Improve Noise Figure Measurements

Adding a preamplifier to a noise figure measurement system can significantly reduce the overall system noise figure. The total system noise is dominated by the noise figure of the preamplifier.

$$F_{new} = F_{pa} + \frac{F_{sys} - 1}{G_{pa}}$$

Where F and G are noise figure and preamplifier gain, both in linear terms.

$$NF_{sys} = 10 \log (F_{sys}) \text{ in dB}$$

For systems with a single preamplifier, where the gain of the preamplifier is greater than or equal to the spectrum analyzer noise figure, the system noise figure is approximately equal to the noise figure of the preamplifier.

Increase Sensitivity and Speed

Measurement system sensitivity for measuring low-level signals can be improved by adding a preamplifier. Alternatively, boosting the sensitivity of your signal or spectrum analyzer with the U7227/8A/C/F USB preamplifiers can provide a means for achieving a faster measurement speed. An analyzer with low noise figure allows you to use a wider resolution bandwidth, yet achieve the same sensitivity. Sweep times can improve one hundred times for each decade increase in bandwidth. The U7227/8A/C/F USB preamplifiers have gain and noise figure characteristics that optimize dynamic range and sensitivity.

Low Noise Amplifier Measurements

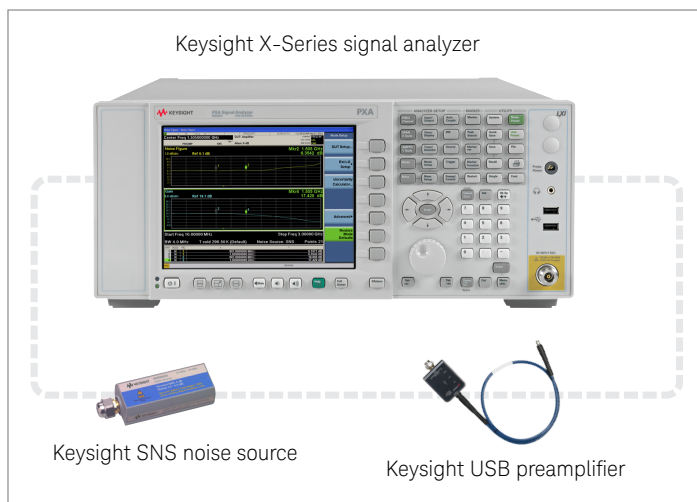


Figure 1. USB Preamplifier calibration setup

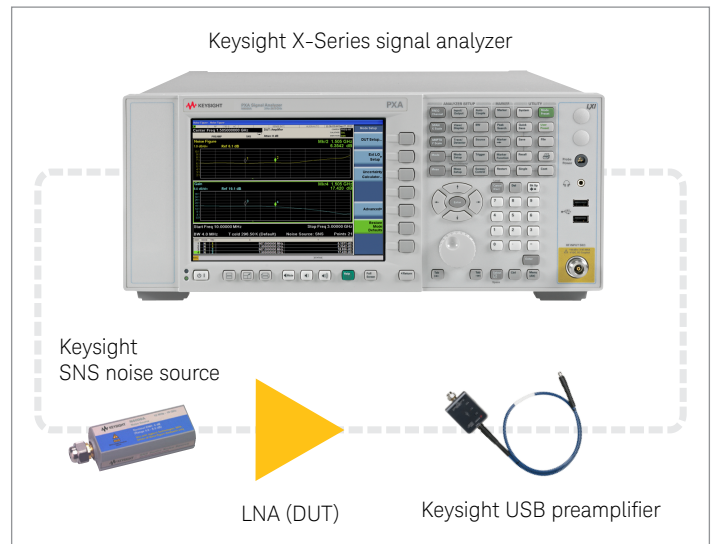


Figure 2. LNA noise figure measurement setup

Figure 2 above shows the typical setup with a Keysight X-Series signal analyzer for noise figure measurements on a low noise amplifier (LNA) device using the Y-factor measurement technique. The method begins with the calibration setup shown in Figure 1; connecting the USB preamplifier and noise source to the X-Series signal analyzer, setting a start and stop frequency, then calibrate the system through the noise figure measurement application on the signal analyzer. The next step is to insert the LNA and observe the gain and noise figure for the measurement as shown in Figure 2. The built-in uncertainty calculator for the signal analyzer will perform the calculation work for you by importing uncertainties from the specification guide, calibration data from the SNS (noise source), and the gain, noise figure, and match terms of the USB preamplifiers. The uncertainty calculator will also import the LNA noise figure and gain terms from the previous measurement.

Mixer Measurements

For noise figure measurements on frequency-converting devices such as mixers, a more complicated setup is required.

Figure 4 shows a setup using a low pass filter (LPF) after the mixer (DUT) to remove any LO feed through. First the measurement system will require calibration (Figure 3) which includes calibrating with the LPF to include it in the measurement system. When the calibration process is complete, the DUT will be inserted between the low pass filter and the SNS source with the LO input being connected to a source. Noise figure measurements can now be carried out for the DUT.

Built-in uncertainty calculators do not work for frequency converting devices. For this application, you will need the RF (input) and IF (output) VSWR from the data sheet of the mixers to estimate the uncertainty of the system being measured.

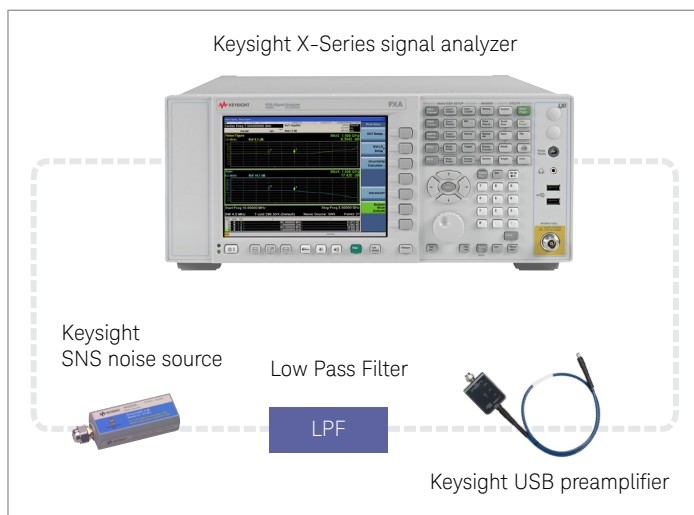


Figure 3. USB preamplifier calibration setup

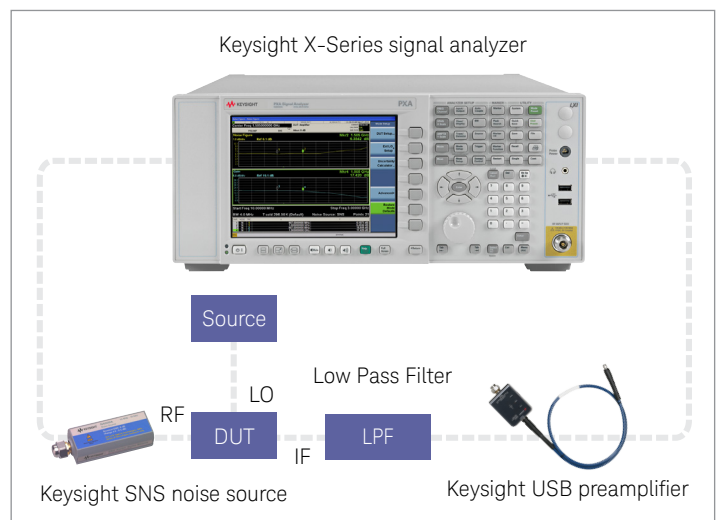


Figure 4. Mixer noise figure measurement setup

Specifications*

Specifications refer to the performance standards or limits against which the U7227A/C/F USB preamplifiers are tested.

Typical characteristics are included for additional information only and they are not specifications. Those are denoted as “typical”, “nominal” or “approximate” and are printed in *italic*.

Specifications subject to change.

Specification	U7227/8A	U7227/8C	U7227/8F
Frequency	10 MHz to 4 GHz	100 MHz to 26.5 GHz	2 to 50 GHz
Gain (dB)	10 to 100 MHz: > 16 100 MHz to 4 GHz: > 0.5F + 17	100 MHz to 26.5 GHz: > 16.1 + 0.26F	2 to 50 GHz: > 16.5 + 0.23F
Input return loss (Input SWR)	10 to 100 MHz: > 5 dB (3.57) 100 MHz to 2 GHz: > 13.5 dB (1.54) 2 to 3 GHz: > 11.5 dB (1.73) 3 to 4 GHz: > 10 dB (1.93)	100 MHz to 4 GHz: > 15 dB (1.43) 4 to 26.5 GHz: > 8 dB (2.32)	2 GHz to 40 GHz: > 8 dB (2.32) 40 to 44 GHz: > 6 dB (3.00) 44 to 50 GHz: > 5 dB (3.57)
Output return loss (Output SWR)	10 MHz to 4 GHz: > 18 dB (1.29)	100 MHz to 4 GHz: > 18 dB (1.29) 4 to 26.5 GHz: > 11 dB (1.78)	U7227F 2 to 4 GHz: > 18 dB (1.29) 4 to 40 GHz: > 11 dB (1.78) 40 to 50 GHz: > 8 dB (2.32) U7228F 2 to 4 GHz: > 18 dB (1.29) 4 to 26.5 GHz: > 11 dB (1.78) 26.5 to 40 GHz: > 8 dB (2.32) 40 to 50 GHz: > 6 dB (3.00)
Noise figure	10 to 100 MHz: < 5.5 dB 10 MHz to 4 GHz: < 5 dB	100 MHz to 4 GHz: < 6 dB 4 to 6 GHz: < 5 dB 6 to 18 GHz: < 4 dB 18 to 26.5 GHz: < 5 dB	2 to 4 GHz: < 10 dB 4 to 40 GHz: < 8 dB 40 to 44 GHz: < 9 dB 44 to 50 GHz: < 10 dB
Plug and play USB connection	Yes	Yes	Yes
Optimized gain slope for better spectrum analysis	Yes	Yes	Yes
Automatic gain compensation	Yes	Yes	Yes
Automatic temperature compensation	Yes	Yes	Yes

* Specifications are tested and measured with an operating temperature of 23 °C.

* “F” signifies frequency in GHz

Supplemental characteristics	U7227/8A	U7227/8C	U7227/8F
Data storage	EEPROM	EEPROM	EEPROM
Bias voltage and current	USB 5 Vdc at 360 mA	USB 5 Vdc at 400 mA	USB 5 Vdc at 460 mA
Survival input power	+ 17 dBm	+ 17 dBm	+ 10 dBm
Power dissipation (typical)	1.8 W	2 W	2.3 W
Temperature coefficient (typical)	-0.009 dB/C	-0.03 dB/C	-0.18 dB/C
Pin depth	0 to -0.05 mm (0 to -0.002 in)	0 to -0.05 mm (0 to -0.002 in)	0 to -0.05 mm (0 to -0.002 in)
RF connector	3.5 mm (m)	3.5 mm (m)	2.4 mm (m)

Amplitude accuracy (typical)

		Total measurement uncertainty, 95th dB	Interpolation error, 2σ
0	0.01 to 3.6 GHz	0.036	0.0326
1	3.5 to 8.4 GHz	0.085	0.0267
2	8.3 to 13.6 GHz	0.091	0.0188
3	13.5 to 17.1 GHz	0.096	0.0354
4	17.0 to 26.5 GHz	0.106	0.1138
5	26.4 to 34.5 GHz	0.153	0.1082
6	34.4 to 50 GHz	0.238	0.3438

Input VSWR (typical)

Model	Frequency range	95th percentile VSWR
U7227/8A	0.01 to 4 GHz	1.811
U7227/8C	0.1 to 26.5 GHz	2.073
U7227/8F	2 to 50 GHz	2.265

Note: The 95th percentile VSWR shown is actually the 95th percentile of a Rayleigh distribution that would give similar mismatch uncertainty to that from an observed example preamplifier. The actual 95th percentile distribution is smaller than this, but it only modestly matches a Rayleigh distribution. Still, Keysight recommends using the methods outlined in Application Note Fundamentals of RF and Microwave Power Measurements (part number 5988-9215EN) and companion Average Power Sensor Measurement Uncertainty Calculator to compute mismatch uncertainty. Use this 95th percentile VSWR information and the Rayleigh model (Case C or E in the application note) with that process.

Typical Performance

U7227/8A 10 MHz to 4 GHz USB preamplifier

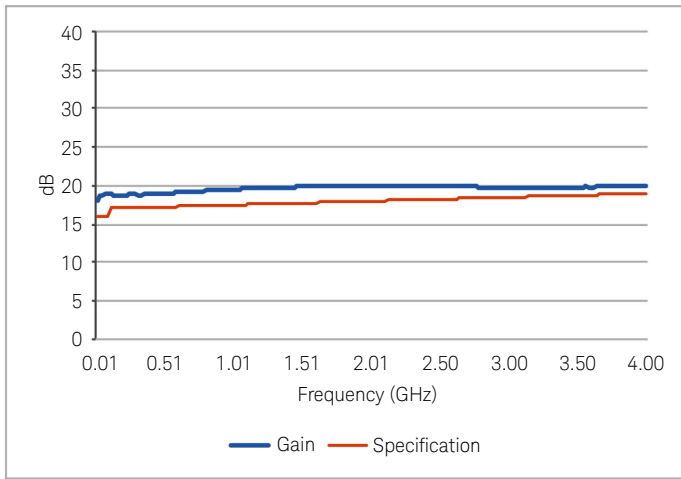


Figure 5. U7227/8A Gain versus frequency (typical)

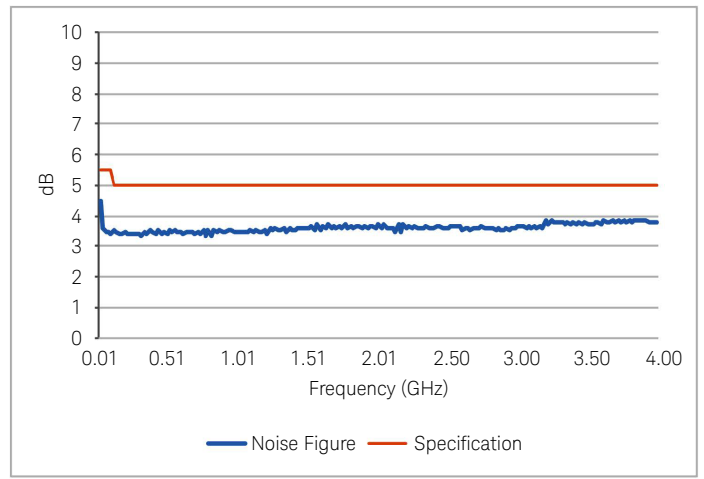


Figure 6. U7227/8A Noise figure versus frequency (typical)

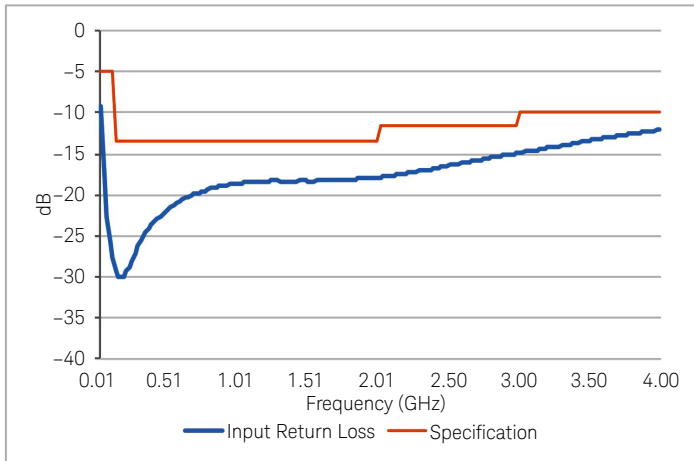


Figure 7. U7227/8A return loss versus frequency (typical)

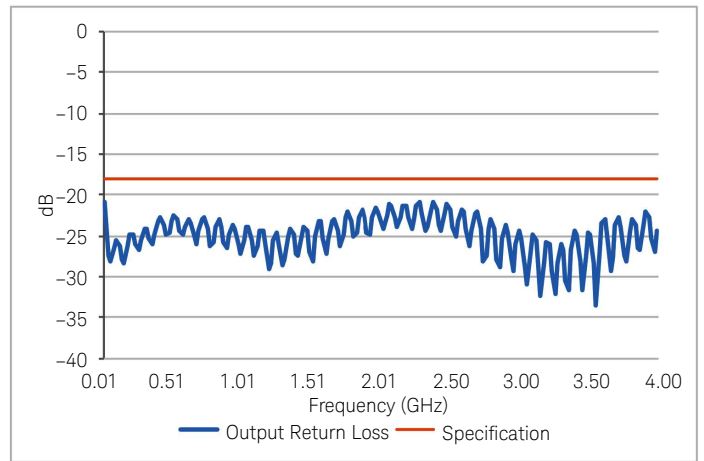


Figure 8. U7227/8A Output return loss versus frequency (typical)

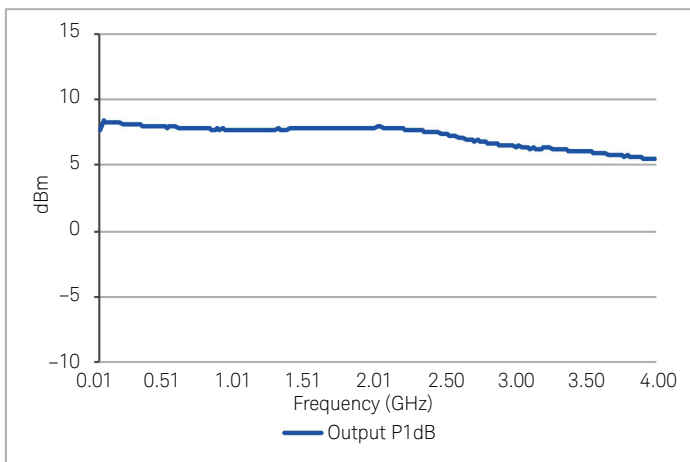


Figure 9. U7227/8A Output P1dB versus frequency (typical)

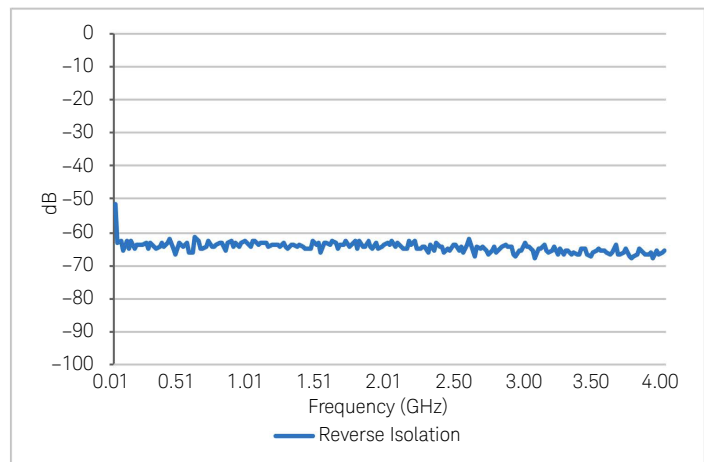


Figure 10. U7227/8A Reverse isolation versus frequency (typical)

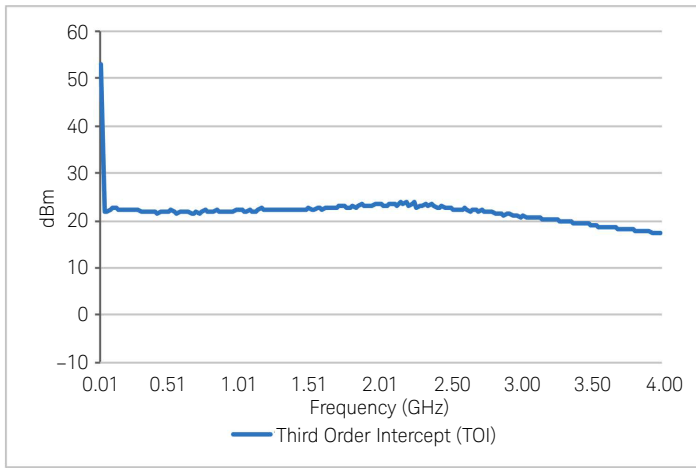


Figure 11. U7227/8A Third order intercept (TOI) versus frequency (typical)

Typical Performance

U7227/8A 100 MHz to 26.5 GHz USB preamplifier

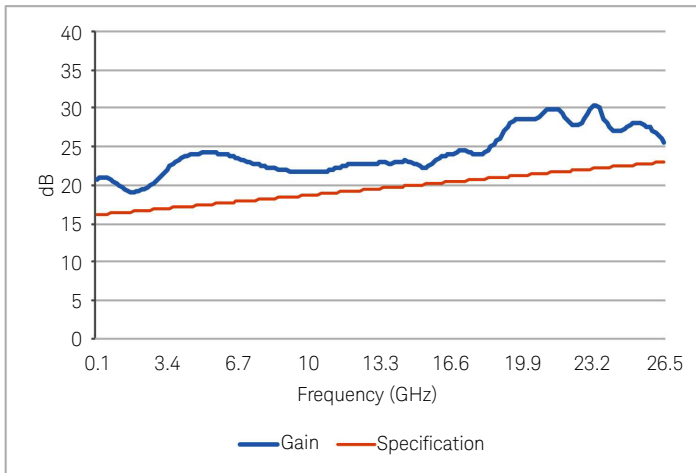


Figure 12. U7227/8C Gain versus frequency (typical)

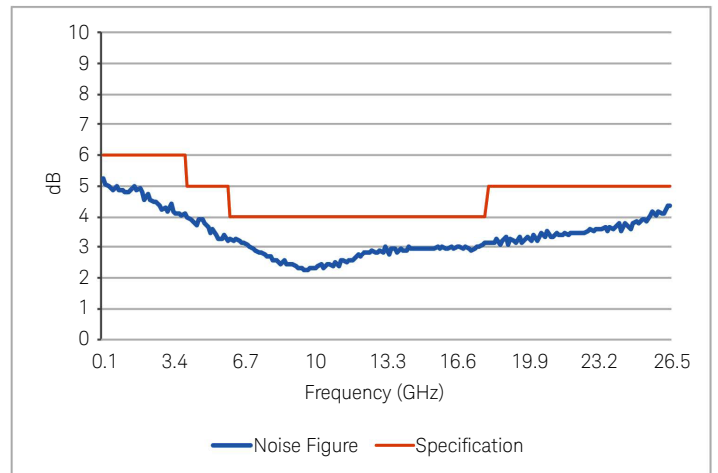


Figure 13. U7227/8C Noise figure versus frequency (typical)

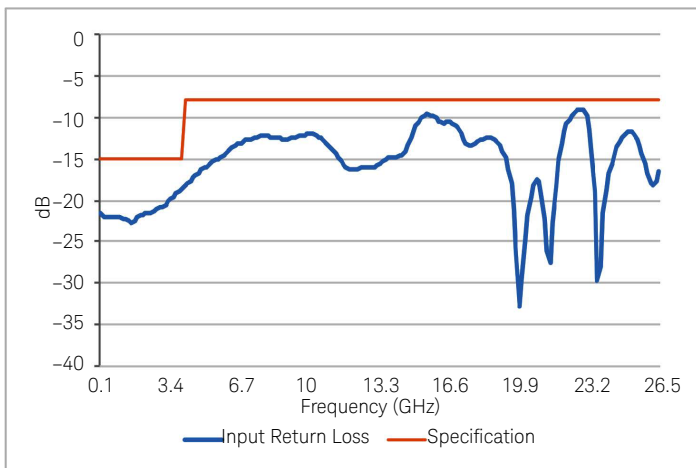


Figure 14. U7227/8C Input return loss versus frequency (typical)

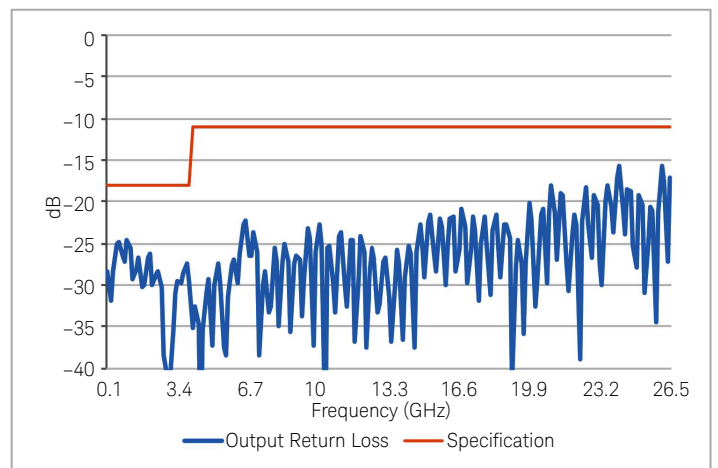


Figure 15. U7227/8C Output return loss versus frequency (typical)

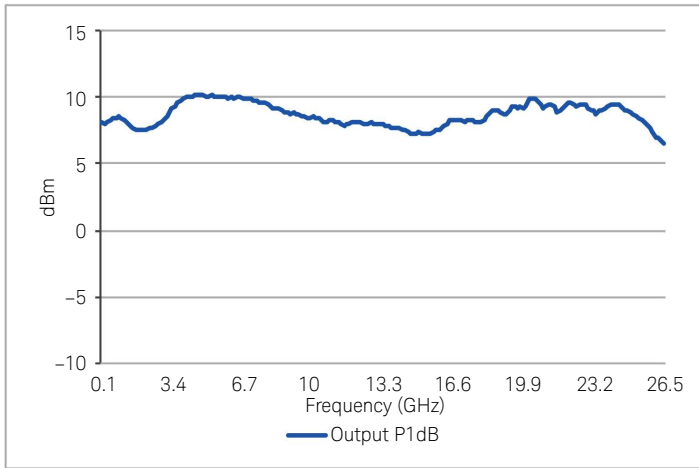


Figure 16. U7227/8C Output P1dB versus frequency (typical)

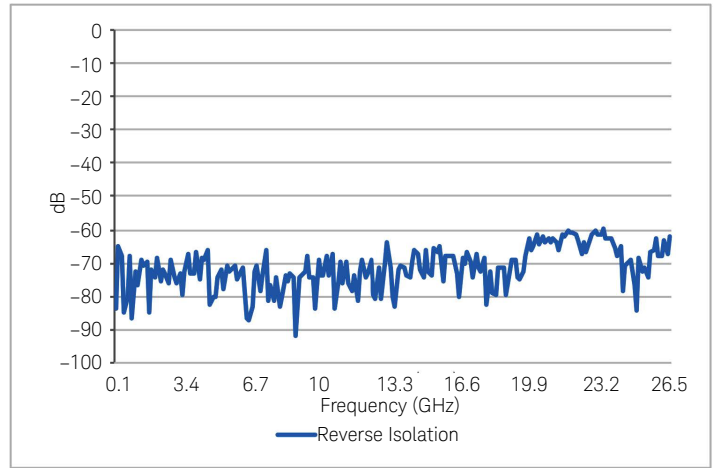


Figure 17. U7227/8C Reverse isolation versus frequency (typical)

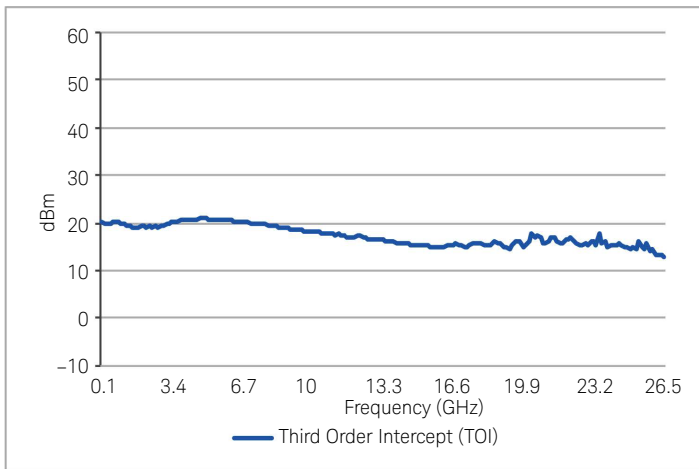


Figure 18. U7227/8C Third order intercept (TOI) versus frequency (typical)

Typical Performance

U7227/8F 2 to 50 GHz USB preamplifier

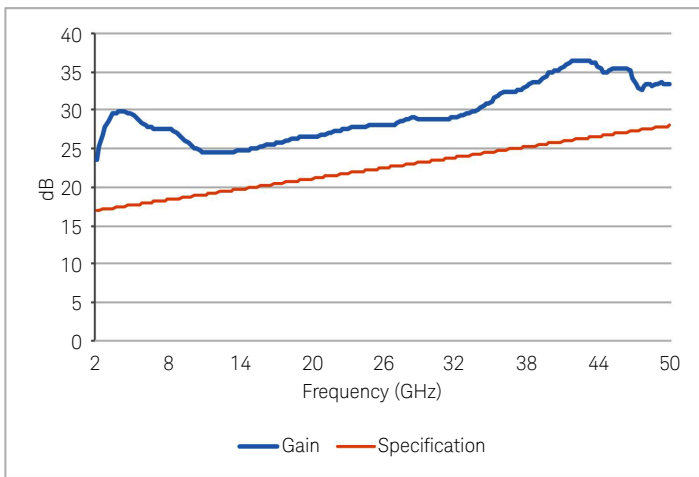


Figure 19. U7227/8F Gain versus frequency (typical)

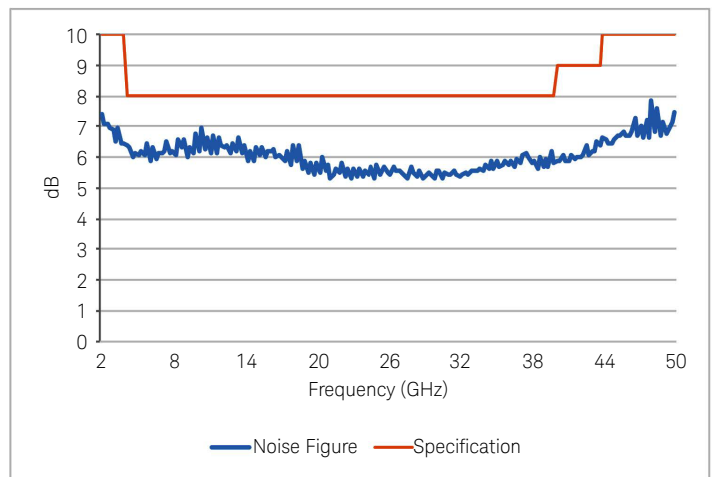


Figure 20. U7227/8F Noise figure versus frequency (typical)

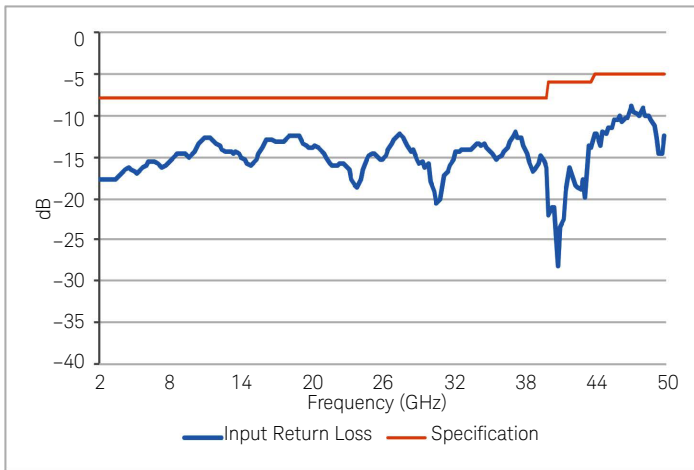


Figure 21. U7227/8F Input return loss versus frequency (typical)

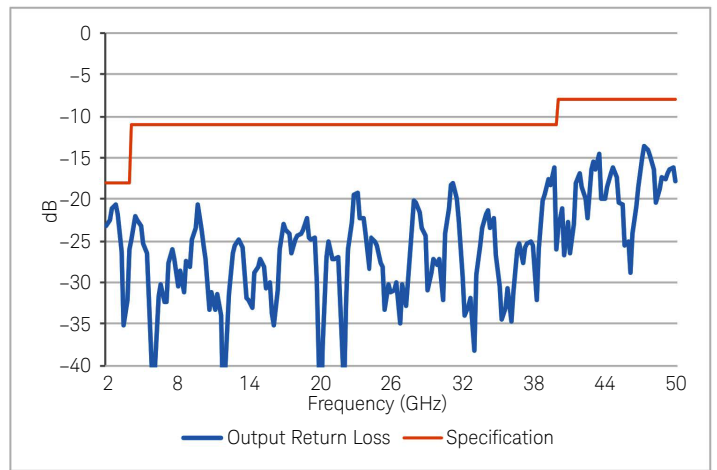


Figure 22. U7227/8F output return loss versus frequency (typical)

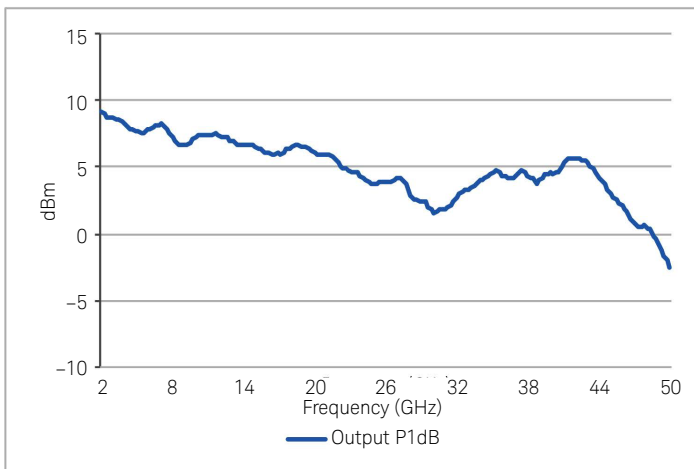


Figure 23. U7227/8F output P1dB versus frequency (typical)

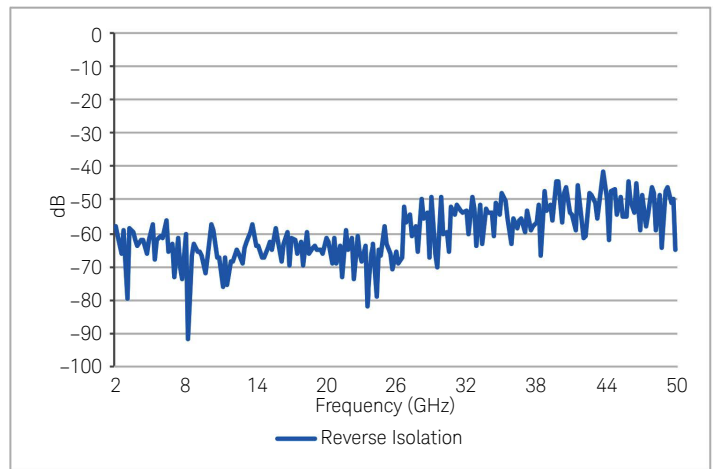


Figure 24. U7227/8F Reverse isolation versus frequency (typical)

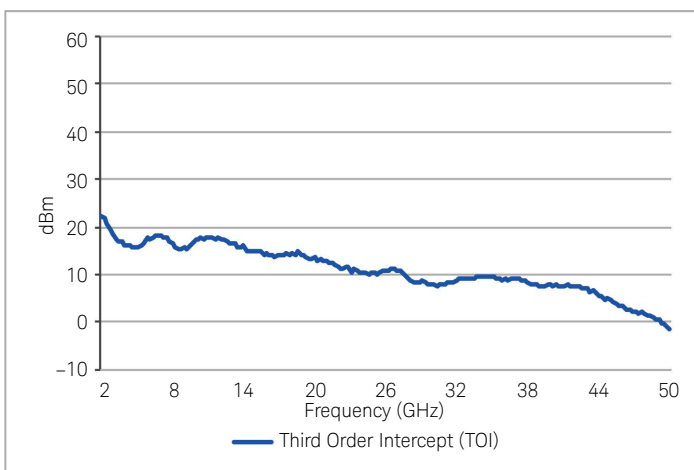


Figure 25. U7227/8F third order intercept (TOI) versus frequency (typical)

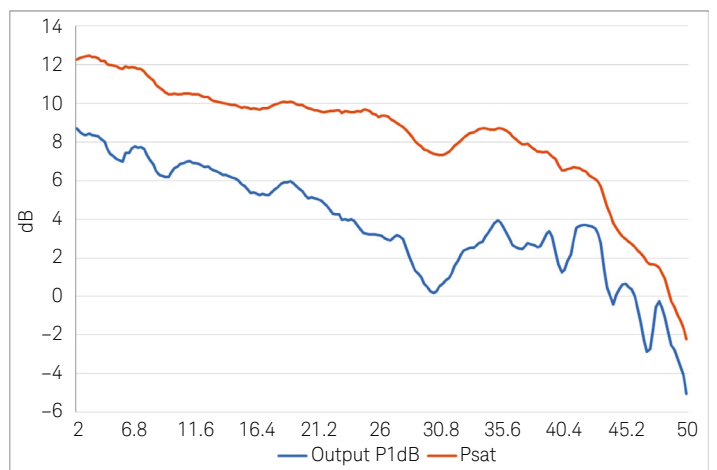


Figure 26. U7227/8F output power versus frequency (typical)

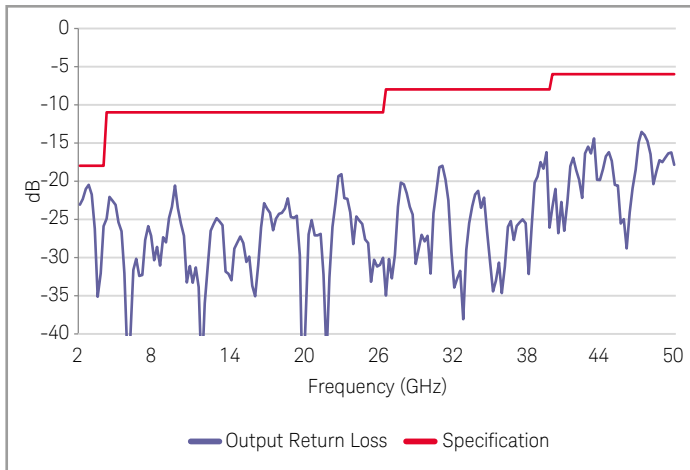


Figure 27. U7228F output return loss versus frequency (typical)

Environmental Specifications

Keysight U7227/8A/C/F USB preamplifiers fully comply with Keysight's product operating environmental specifications. The following are the summarized environmental specifications for these products.

Temperature range	
Operating	0 to 55 °C
Storage	-40 to 70 °C
Relative humidity	
Operating	50 % to 95 % RH at 40 °C
Storage	90 % RH at 65 °C
Shock	
End-use handling shock	1.6 m/s
Transportation shock	50 g, 8 m/s
Vibration	
Operating	Random: 5 to 500 Hz, 0.21 g rms
Survival	Random: 5 to 500 Hz, 2.09 g rms Swept sine: 5 to 500 Hz, 0.5 g rms
ESD immunity	
Direct discharge	6 kV per IEC 61000-4-2
Air discharge	15 kV per IEC 61000-4-2

Mechanical Dimension

Mechanical dimensions do not include RF cables and connectors

Model	Weight	Pin depth	Height	Width	Length
U7227/8A					
U7227/8C	0.38 kg (0.84 lbs)	0 to – 0.05 mm (0 to – 0.002 in)	35.50 mm (1.40 in)	60.00 mm (2.36 in)	75.00 mm (2.95 in)
U7227/8F					

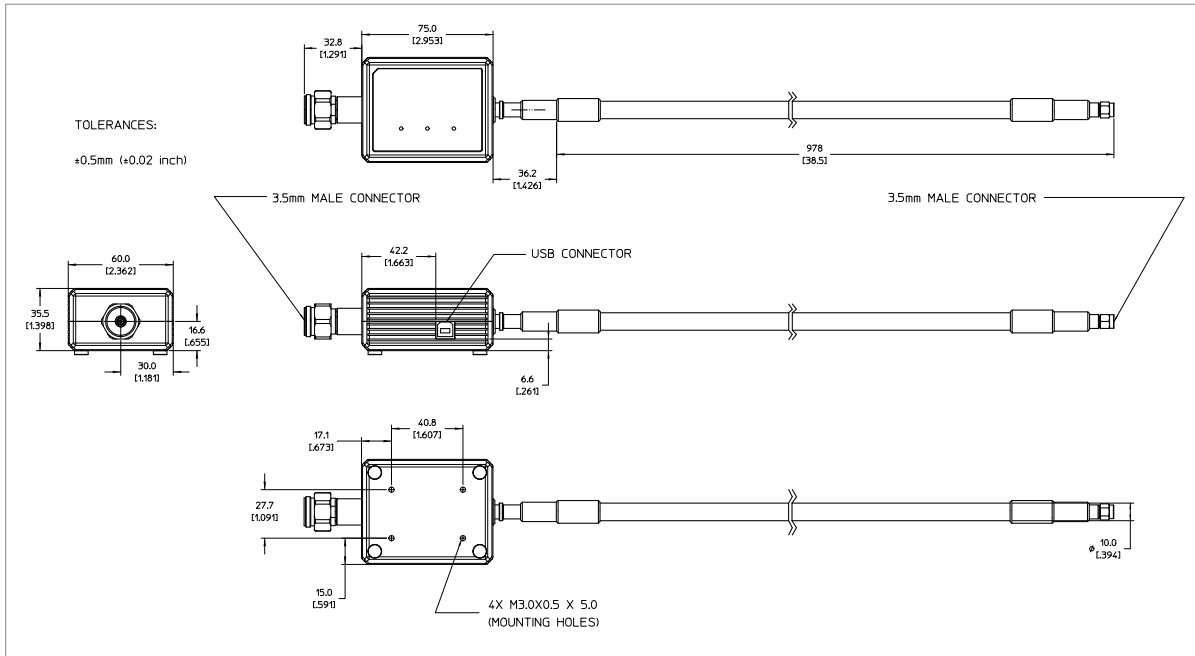


Figure 28. Mechanical dimensions for U7227A and U7227C USB preamplifiers

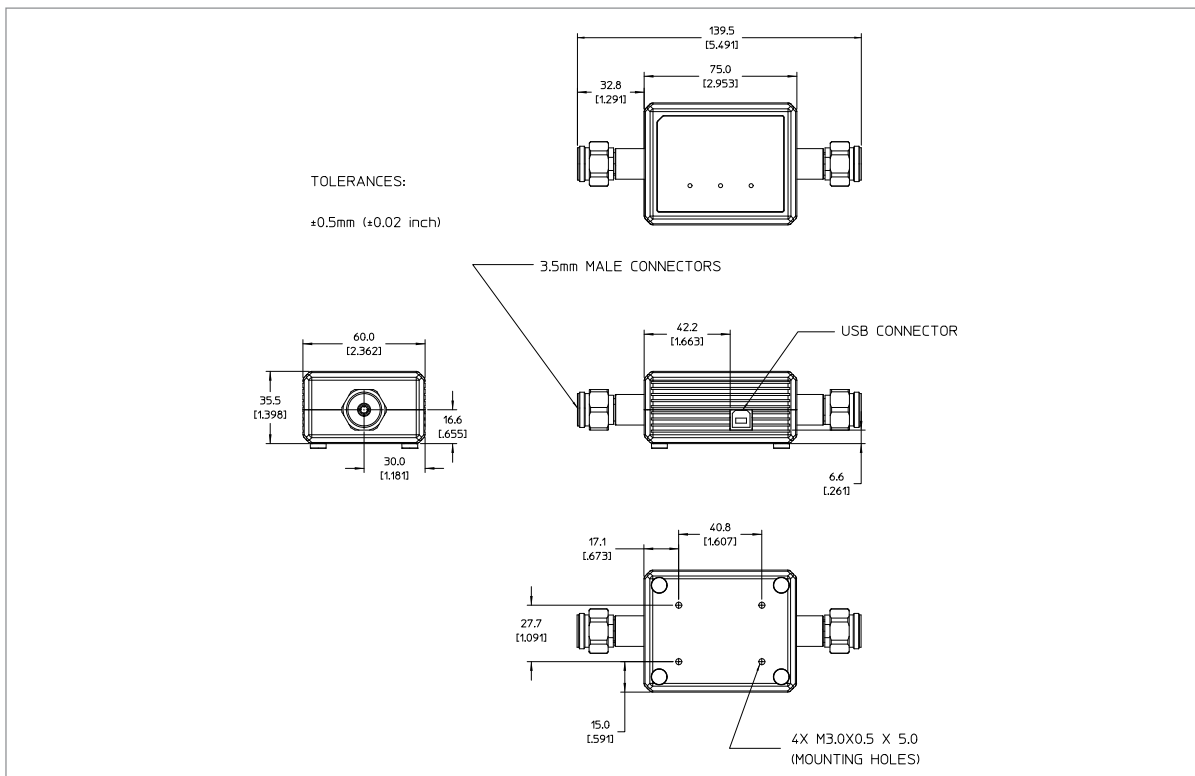


Figure 29. Mechanical dimensions for U7228A and U7228C USB preamplifiers

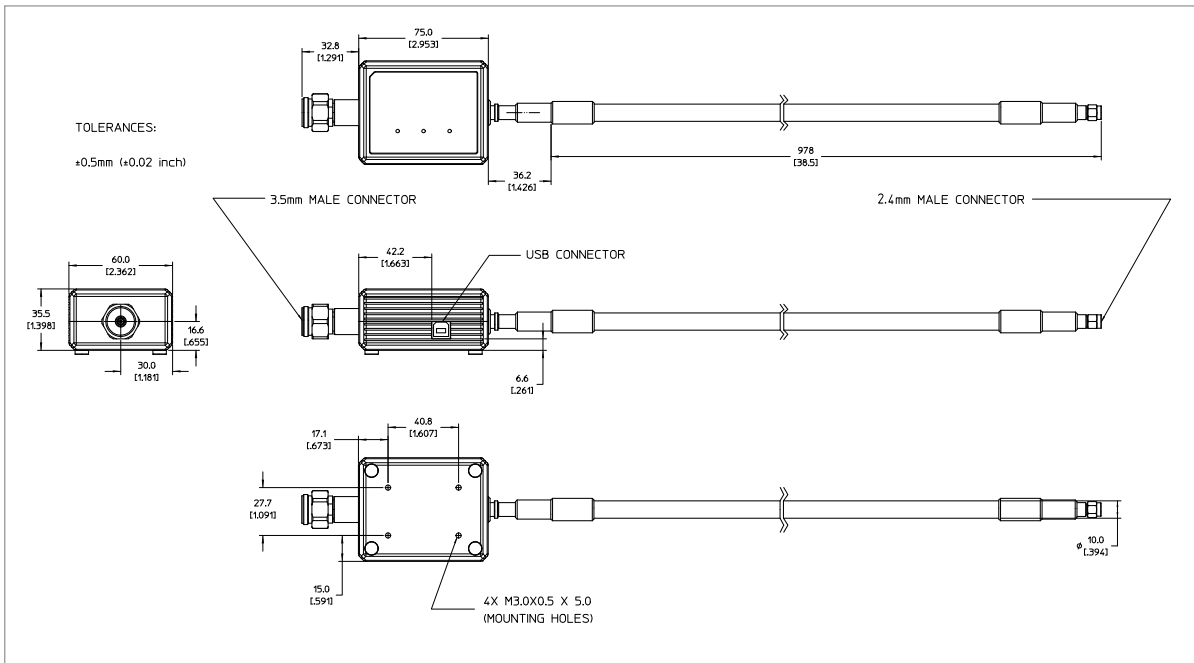


Figure 30. Mechanical dimensions for U7227F USB preamplifier

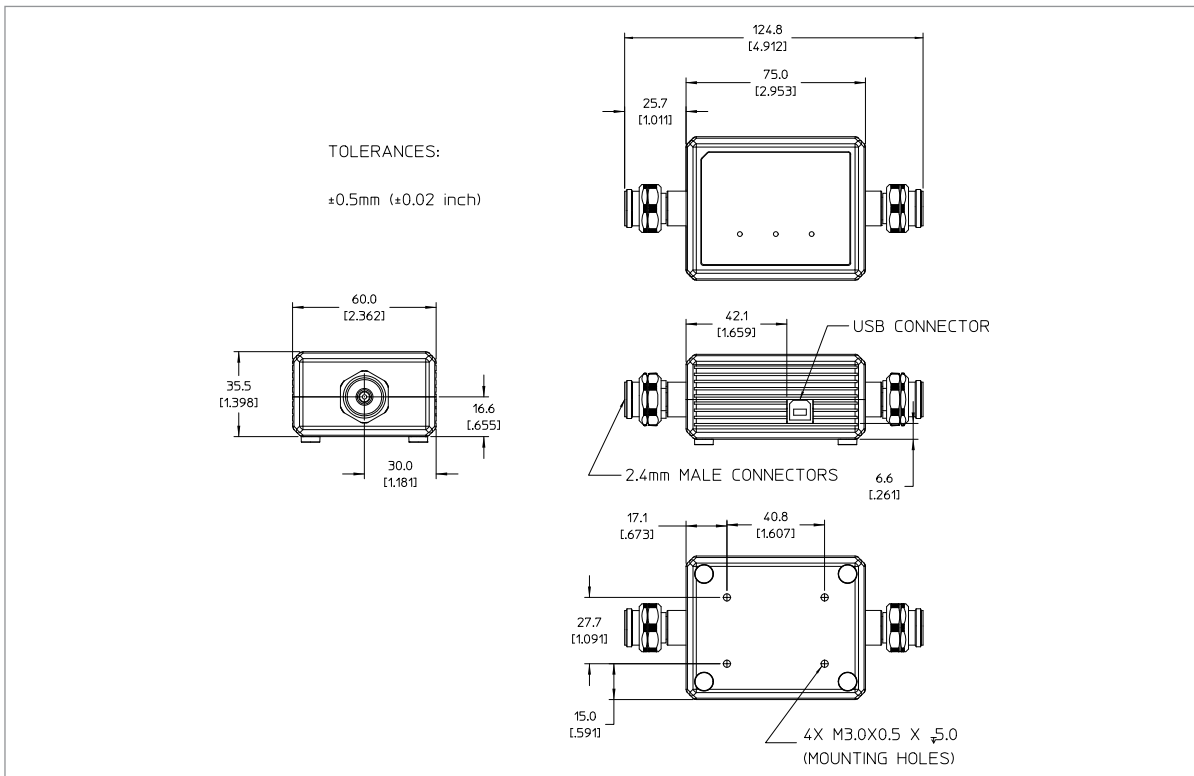


Figure 31. Mechanical dimensions for U7228F USB preamplifier

Ordering Information

U7227/8A	10 MHz to 4 GHz USB Preamplifier ¹
U7227/8C	100 MHz to 26.5 GHz USB Preamplifier ¹
U7227/8F	2 to 50 GHz USB Preamplifier ²

1. The product ships with one 3.5 (f) to Type-N (m) adapter.
2. The product ships with one 2.4 (f) to 2.4 (f) adapter.

Recommended Signal Analyzers

N9040/1B UXA Signal Analyzers, 3 kHz to 8.4/13.6/26.5/44/50/90/110 GHz

www.keysight.com/find/uxa

N9030A/B PXA X-Series Signal Analyzers, 3 Hz to 8.4/13.6/26.5/43/44/50 GHz

www.keysight.com/find/pxa

N9020A/B MXA X-Series Signal Analyzers, 10 Hz to 3.6/8.4/13.6/26.5 GHz

www.keysight.com/find/mxa

N9010A/B EXA X-Series Signal Analyzers, 10 Hz to 3.6/7/13.6/26.5/32/44 GHz

www.keysight.com/find/exa

www.keysight.com


www.keysight.com/find/mta

www.keysight.com/find/amplifiers

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

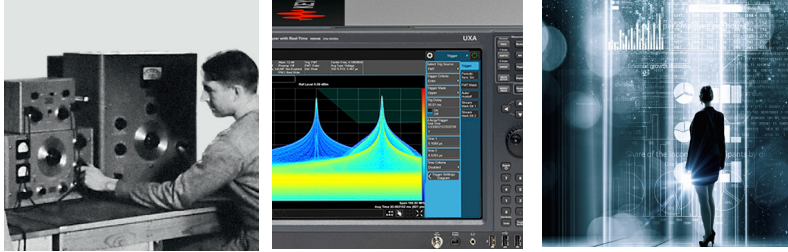

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/mta

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-6-20-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System

This information is subject to change without notice.
© Keysight Technologies, 2014 - 2017
Published in USA, August 30, 2017
5991-4246EN
www.keysight.com



Unlocking Measurement Insights