

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG



- Material
 - ①Screws : M3.0 steel, Ni plated
 - ②Housing : PA66,UL94V-0
 - ③Terminal : Brass, Tin plated

- Electrical
 - UL IEC
 - Rated voltage : 300V 250V
 - Rated current : 15A 24A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-14AWG 2.5mm²

- Mechanical
 - Operating temperature: -40°C to +105°C
 - Soldering temperature: 250°C ±5/5sec
 - Torque: 0.5N.m (4.43lb.in)

HOW TO ORDER

KF-25H-7.62-XXP-1 X-XXXXX

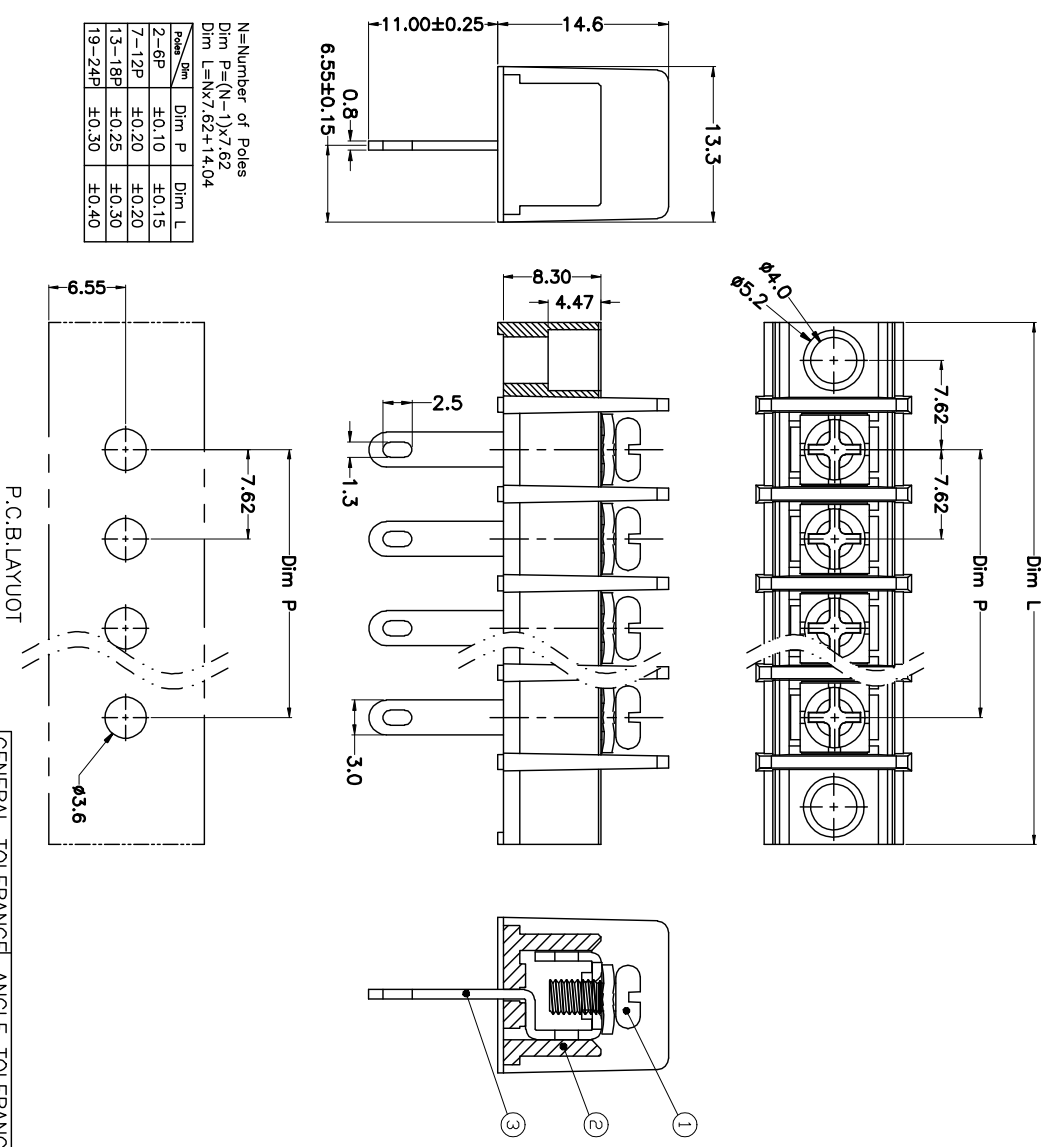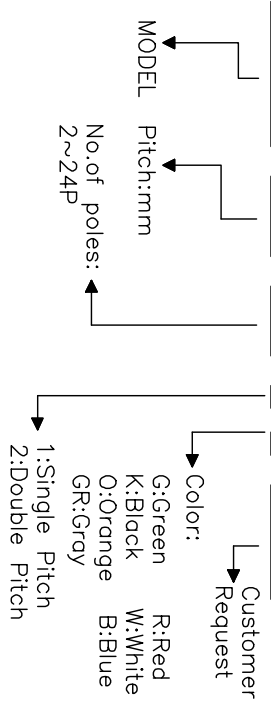

N=Number of Poles
Dim P=(N-1)X7.62
Dim L=Nx7.62+14.04

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

P.C.B.LAYOUT

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.5	X. ±5°
.X ±0.3	.X. ±3'
.XX ±0.1	.XX' ±1'
DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	XP0012016-xxxx

PROJECTION	TITLE
mm	KF-25H-7.62-XXP
UNITS	
mm	
SHEET SIZE	A4
SERIES	KF-25H

KALFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD

DF 慈溪市凯峰电子有限公司