
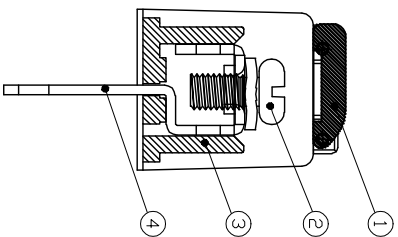
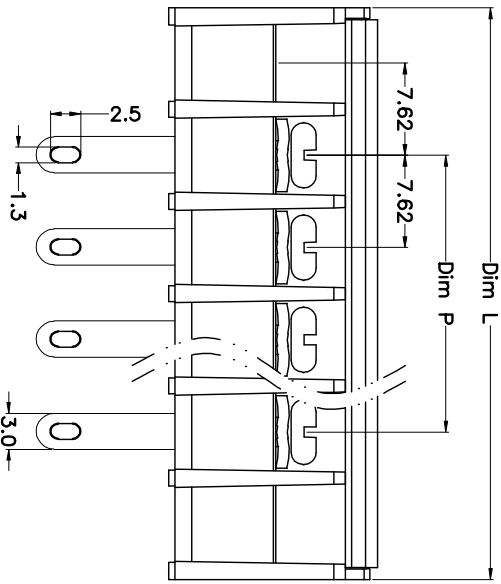
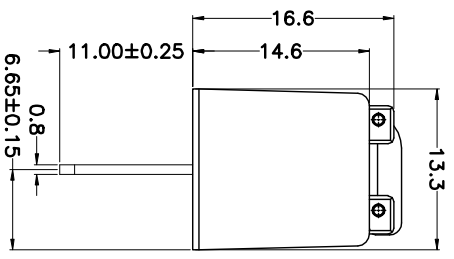


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

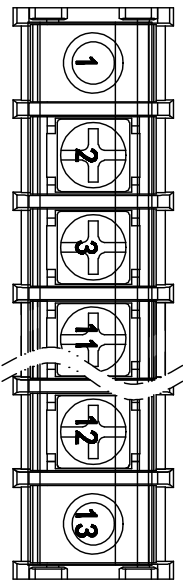


- Material
 - ⊙Cover : PA66,UL94V-0
 - ⊙Screws : M3.0 steel, Ni plated
 - ⊙Housing : PA66,UL94V-0
 - ⊙Terminal : Brass, Tin plated

- Electrical UL IEC
 - Rated voltage : 300V 250V
 - Rated current : 15A 24A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 22-14AWG 2.5mm²

- Mechanical
 - Operating temperature: -40°C to +105°C
 - Soldering temperature: 250°C±5/5sec
 - Torque: 0.5N.m (4.43lb.in)


HOW TO ORDER

KF-25HM-7.62-XXP-1 X-XXXXX

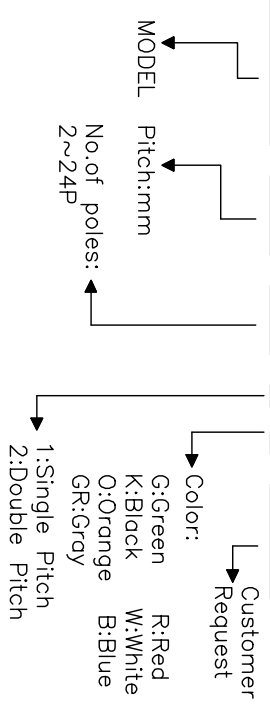

N=Number of Poles
Dim P=(N-1)X7.62
Dim L=Nx7.62+16.74

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

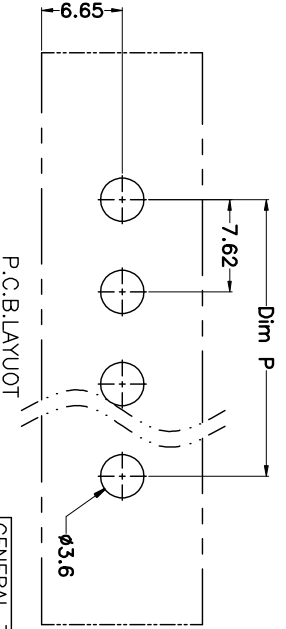

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.5	X. ±5'
.X ±0.3	.X ±3'
.XX ±0.1	.XX ±1'

DRAWING TYPE	CUSTOMER	SHEET	OF
SCALE	1:1	1	1

DRAWING NO.	XP0012016-xxxx
-------------	----------------

PROJECTION: 1st Angle

UNITS: mm

SHEET SIZE: A4

SERIES: KF-25HM

TITLE: KF-25HM-7.62-XXP

KF 慈溪市凯峰电子有限公司

KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD