

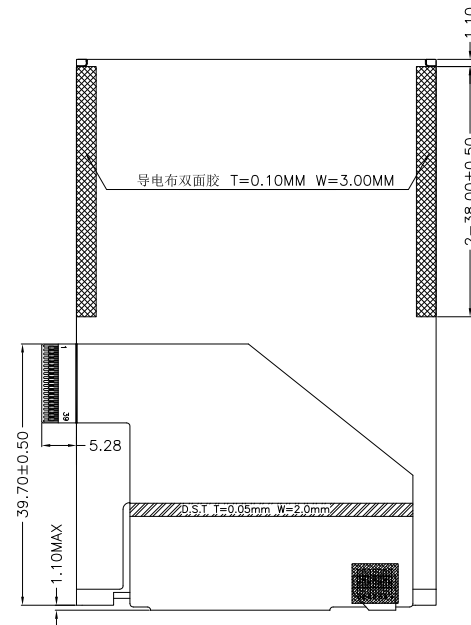


2.11±0.20
不含双面胶

0.13±0.03
contact side
stiffener
0.20±0.04

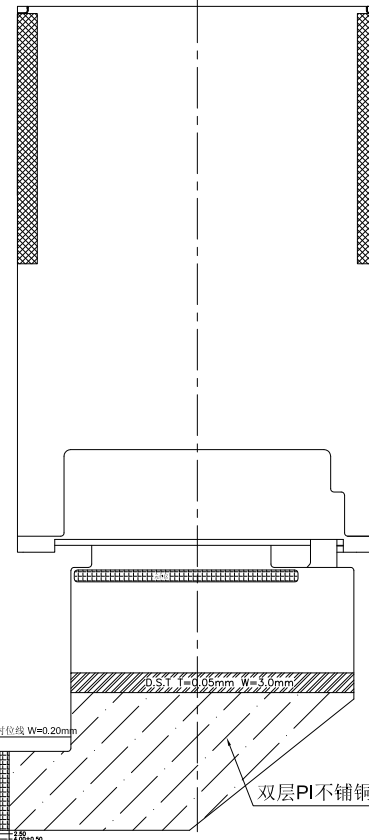

FPC折弯后示图



PIN FUNCTION

1	NC
2	NC
3	NC
4	NC
5	GND
6	/RESET
7	GND
8	GND
9	GND
10	GND
11	GND
12	GND
13	GND
14	GND
15	DB7
16	DB6
17	DB5
18	DB4
19	DB3
20	DB2
21	DB1
22	DB0
23	/RD
24	/WR
25	RS
26	/CS
27	VDD(2.9V)
28	VDD(1.8V/2.8V)
29	GND
30	LED+
31	LED1-
32	LED2-
33	LED3-
34	LED4-
35	LED5-
36	LED6-
37	FMARK
38	NC
39	NC

BLAZE Blaze Display Technology Co.,Ltd.


DISPLAY TYPE:	3.5" TFT	DISPLAY DRIVER:	NT35310	PIXEL PITCH:	0.153 X 0.153 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X6), 并联
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	320(RGB)X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

DESIGNED BY: BDT-23

BDT-T3539-01-SERIES

VERSION: 1.0

CHECKED BY: BDT-09



PAGE 1 OF 1

APPROVED BY: BDT-05

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2015-09-20