




Revised Record

1.0 New Issue


2015-10-18

FPC INTERFACE

1	K
2	A
3	NC
4	DVDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR(NC)
38	YD(NC)
39	XL(NC)
40	YU(NC)

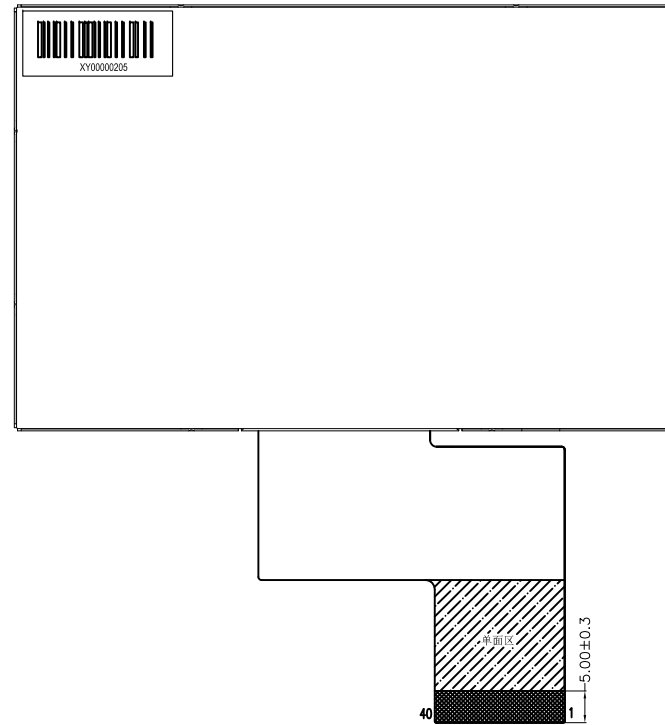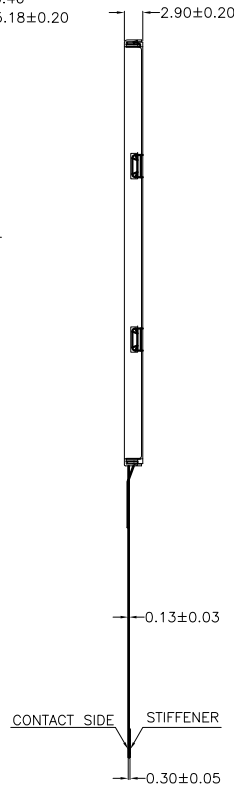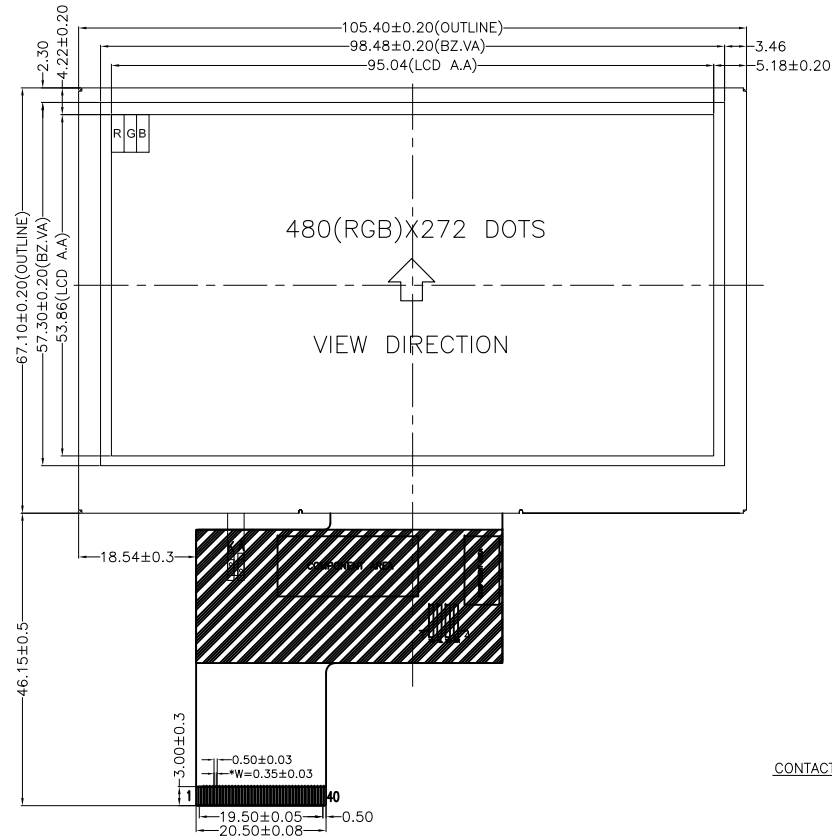

Backlight Circuit:



DISPLAY TYPE:	4.3" TFT	DISPLAY DRIVER:	ILI6480H	PIXEL PITCH:	0.198 X 0.198 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X10),5串*2并
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	480(RGB)X272 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

**BLAZE** Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-23      BDT-T4340-01-SERIES      VERSION: 1.0

CHECKED BY: BDT-09             PAGE 1 OF 1

APPROVED BY: BDT-05      UNIT: mm

Website: <http://www.blazedisplay.com>      DATE: 2015-10-18