

# UTCPC1316 LINEAR INTEGRATED CIRCUIT


## DUAL CHANNEL AUDIO POWER AMPLIFIER

### DESCRIPTION

The UTC PC1316 is a monolithic integrated circuit, designed for the audio amplifier part in tape recorders and radio.


### FEATURES

- \*Wide operating voltage( 3V~16V)
- \*Low quiescent current
- \*Low harmonic distortion
- \*Large output power( 2W, maximum)
- \*Fine ripple rejection characteristic

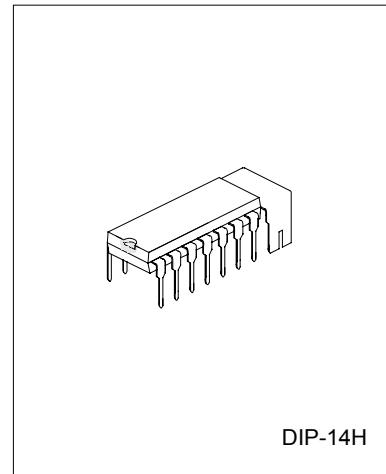

DIP-14H

### BLOCK DIAGRAM

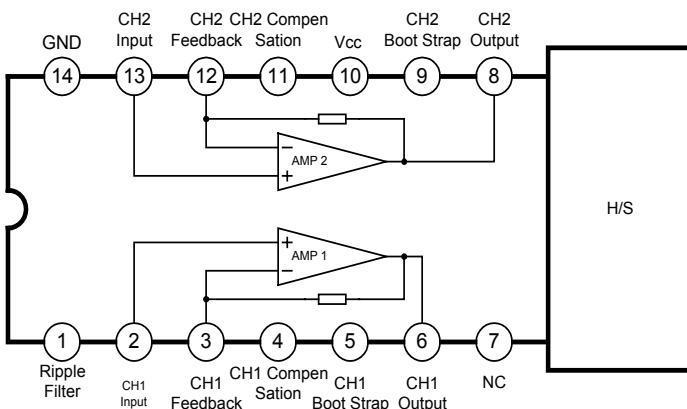

### ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage(no signal)	Vcc	18	V
Supply Voltage(operating)	Vcc	16	V
Power Dissipation	PD	2	W
Operating Temperature	TOPR	-20 ~ 75	°C
Storage Temperature	TSTG	-40 ~ 150	°C


# UTCPC1316 LINEAR INTEGRATED CIRCUIT

## ELECTRONIC CHARACTERISTICS

(Ta=25°C, Vcc=9V, Rf=33Ω, f=1kHz, RL=8Ω, unless otherwise specified)


PARAMETER	TEST CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Quiescent Current	No Signal	ICCQ		10		mA
Voltage Gain	Po=0.25W, Rf=33Ω	Gv		44		dB
	Po=0.25W, Rf=120Ω	Gv		34		dB
	Vcc=12V, RL=8Ω, THD=10%	PO		2		W
	Vcc=9V, RL=4Ω, THD=10%	PO		1.6		W
Output Power	Vcc=9V, RL=8Ω, THD=10%	PO		1.2		W
	Vcc=6V, RL=4Ω, THD=10%	PO		0.7		W
	Vcc=6V, RL=8Ω, THD=10%	PO		0.5		W
Total Harmonic Distortion	Po=0.5W, Rf=33Ω	THD		0.8		%
	Po=0.5W, Rf=120Ω	THD		0.4		%
Noise Output Voltage	Rg=10kΩ	VNO		0.6		mV
Ripple Rejection Ratio	Rg=0, frip=100Hz, Vrip=0.3V	RR		50		dB
Channel Separation	Rg=0, Po=0.25W	CS		55		dB
Channel Balance	Po=0.25W	CB	-2	0	2	dB
Input Impedance		RI		5		MΩ

## APPLICATION CIRCUIT

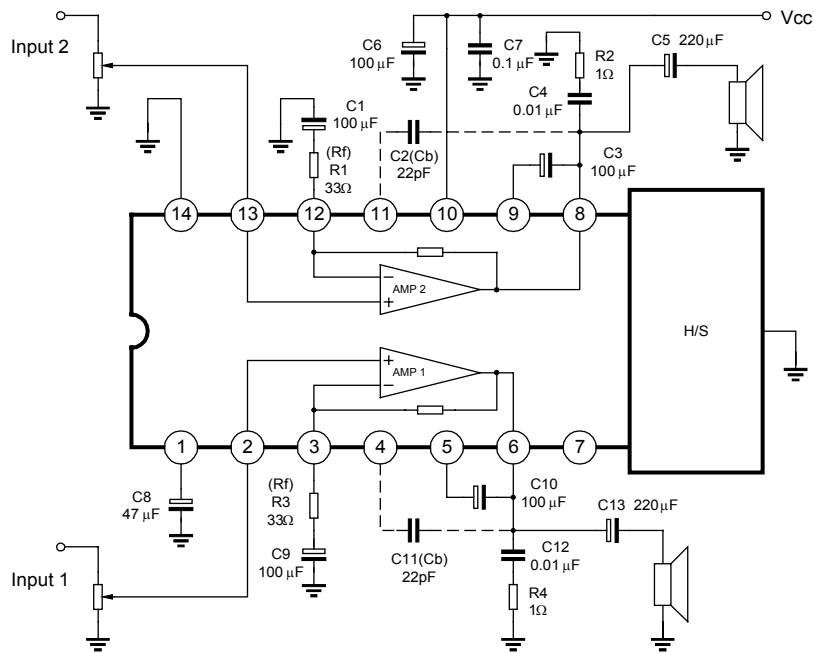

# UTCPC1316 LINEAR INTEGRATED CIRCUIT

## TYPICAL PERFORMANCE CHARACTERISTICS

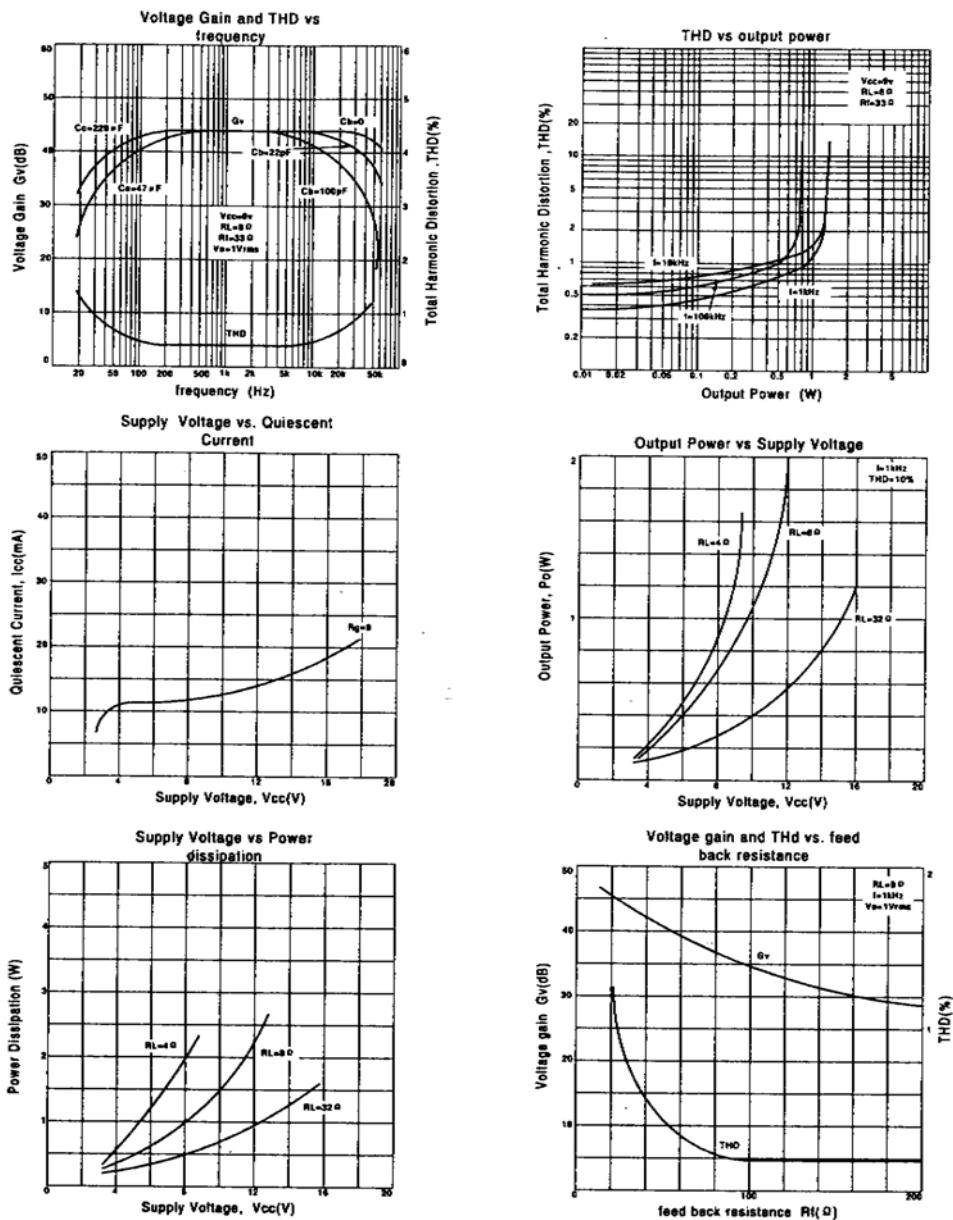

# UTCPC1316      LINEAR INTEGRATED CIRCUIT

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.