
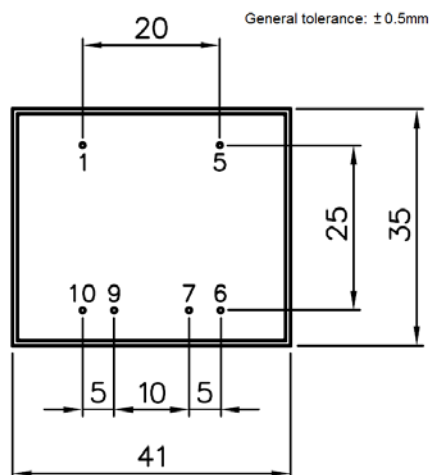




#### Single secondary version

Primary: pins 1 - 5  
Secondary: pins 7 - 9



#### Double secondary version

Primary: pins 1 - 5  
Secondary 1: pins 6 - 7  
Secondary 2: pins 9 - 10



## MAIN FEATURES:

- Unitary insulation test at 5KV
- According **EN61558** European Standard (CE)
- All used materials are minimum **Class B** (130°C)
- Protection index: **IP00**
- Weight: **160gr**
- Other voltages or pin-out under request**

| JESIVA<br>Part nº | RATED<br>POWER | PRIMARY | SECONDARY        | TEMP   | Recommended<br>FUSE |
|-------------------|----------------|---------|------------------|--------|---------------------|
| E3814.40.1.06     | 4.0VA          | 230V    | 6V / 0.66A       | 40°C/B | Prim. 32mA/T        |
| E3814.40.1.07     | 4.0VA          | 230V    | 7.5V / 0.53A     | 40°C/B | Prim. 32mA/T        |
| E3814.40.1.09     | 4.0VA          | 230V    | 9V / 0.44A       | 40°C/B | Prim. 32mA/T        |
| E3814.40.1.12     | 4.0VA          | 230V    | 12V / 0.33A      | 40°C/B | Prim. 32mA/T        |
| E3814.40.1.15     | 4.0VA          | 230V    | 15V / 0.26A      | 40°C/B | Prim. 32mA/T        |
| E3814.40.1.18     | 4.0VA          | 230V    | 18V / 0.22A      | 40°C/B | Prim. 32mA/T        |
| E3814.40.1.24     | 4.0VA          | 230V    | 24V / 0.16A      | 40°C/B | Prim. 32mA/T        |
| E3814.40.2.06     | 4.0VA          | 230V    | 2x6V / 2x0.33A   | 40°C/B | Sec. 2x400mA/F      |
| E3814.40.2.07     | 4.0VA          | 230V    | 2x7.5V / 2x0.26A | 40°C/B | Sec. 2x315mA/F      |
| E3814.40.2.09     | 4.0VA          | 230V    | 2x9V / 2x0.22A   | 40°C/B | Sec. 2x250mA/F      |
| E3814.40.2.12     | 4.0VA          | 230V    | 2x12V / 2x0.16A  | 40°C/B | Sec. 2x160mA/F      |
| E3814.40.2.15     | 4.0VA          | 230V    | 2x15V / 2x0.13A  | 40°C/B | Sec. 2x160mA/F      |
| E3814.40.2.18     | 4.0VA          | 230V    | 2x18V / 2x0.11A  | 40°C/B | Sec. 2x125mA/F      |
| E3814.40.2.24*    | 4.0VA          | 230V    | 2x24V / 2x0.083A | 40°C/B | Sec. 2x100mA/F      |

# DATA SHEET

## EI38/14

Encapsulated transformer

**JESIVA**   
transformers

Code:

**E3814.40.X.XX**

Date:

**Dec 2011**

[www.JESIVA.com](http://www.JESIVA.com)