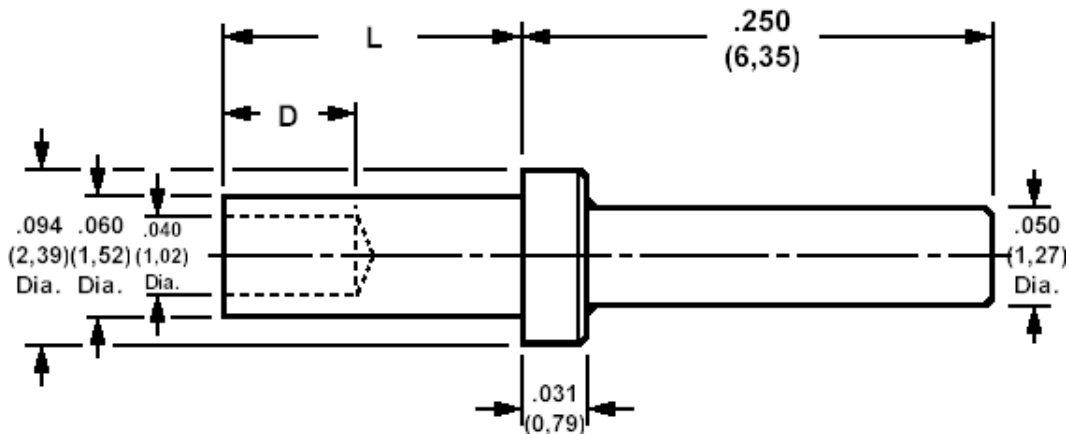


**120-1132 Solder terminal, Pin type**

Recommended mounting hole .064 (1,61), #52 drill

**How to order code****120-1132-XX-YY-00**

Basic Part No XX = L dimension, YY = Plating Finish

| DIMENSIONS (XX) |      |             |                 |             |
|-----------------|------|-------------|-----------------|-------------|
| Basic Part No   | (XX) | L           | Board Thickness | D           |
| 120-1132        | -01  | .063 (1,60) | .031 (0,79)     | .063 (1,60) |
|                 | -02  | .094 (2,39) | .062 (1,59)     | .071 (1,80) |
|                 | -03  | .125 (3,18) | .094 (2,39)     | .071 (1,80) |
|                 | -04  | .156 (3,96) | .125 (3,18)     | .071 (1,80) |

| MATERIALS |          |             |             |
|-----------|----------|-------------|-------------|
| Component | Material | Finish (YY) |             |
|           |          | -03         | -04         |
| Terminal  | Brass    | Gold        | Electro-tin |

| SWAGE TOOLING               |                   |
|-----------------------------|-------------------|
| Recommended Swaging Tools:- |                   |
| Anvil                       | 435-6479-01-00-00 |
| Roll Punch                  | 435-6673-01-00-00 |
| Flare Punch                 | 435-6692-01-00-00 |